



GENERAL CATALOG

CONNECTED TO INNOVATION

Connected to **performance**


For more than 40 years, PREVOST has been designing, manufacturing and marketing a comprehensive range of products for compressed air and fluid distribution networks, including safety quick couplings, filtration solutions and pneumatic equipment.

PREVOST has become the preferred partner for industries using pneumatic and hydraulic power. Each day, the PREVOST team works to provide our customers with the latest, cutting edge technology.



THROUGH INNOVATION AND CONSTANTLY SEEKING
AREAS FOR IMPROVEMENT

THROUGH THE QUALITY OF OUR PRODUCTS,
ADVICE AND SERVICES



PRODUCTION FACILITIES

France
Italy



INTERNATIONAL PRESENCE

France, Germany,
United Kingdom,
Spain, Italy, USA



80 COUNTRIES
with distributors



**7000
PRODUCTS**

Building on its success, PREVOST is expanding across Europe, in the United States and in over 80 countries: our solutions and our team's commitment are truly **CONNECTED TO PERFORMANCE**.

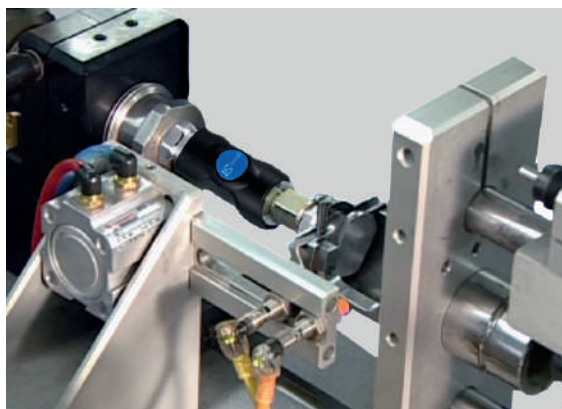
Connected to **innovation**

Our approach to innovation is based on two principles:

■ TECHNOLOGICAL **DEVELOPMENT**

Our R&D strategy has resulted in numerous patent applications.

Our products are integrated with safety features which comply with all applicable safety standards.



■ MAKING THE **BEST USE OF OUR PRODUCTS**

We provide reliable equipment with a long service life to save our customers valuable time and money from lost production and replacement costs.

After investing in PREVOST, your business will begin to see an increase in production rates.

We pay close attention to design and ergonomics, which makes our tools easy and comfortable to handle for long periods of time.



**PATENT
APPLICATIONS**



**MADE IN
FRANCE
AND EUROPE**

PREVOST'S CONNECTION TO INNOVATION ALLOWS YOU TO
OPERATE A HIGHLY EFFICIENT AND SAFE WORKPLACE.

Connected to your **business needs**

One of the best assurances of quality, for us, is our thorough knowledge of your applications. PREVOST supplies companies in the industrial and service sectors where pneumatic and hydraulic powers are used:



→ AUTOMOTIVE **MANUFACTURING**

Automotive construction, assembly lines, etc.

→ AUTOMOTIVE **MAINTENANCE**

Mechanical repairs, paintwork, bodywork, etc.

→ PLASTICS **PROCESSING**

→ WOOD

Sawmills, joinery workshops, etc.

→ TEXTILE **INDUSTRY**

Textile mills, garment manufacturing plants, etc.

→ FOOD-PROCESSING **INDUSTRY**

Abattoirs, meat processing plants, dairies, agricultural applications, etc.

Our products comply with a wide range of quality standards, sanitation requirements, sustainability measures and performance criteria. The designs and construction processes are intended to meet these rigorous specifications.



ISO 9001



QUALITY



SAFETY

.....
**BECAUSE WE UNDERSTAND YOUR
INDUSTRY, WE ARE CONNECTED
TO YOUR NEEDS.**
.....

Connected to our **services**

To better serve you, PREVOST provides excellent technical, logistical and customer support services.



➔ FIRST-CLASS **LOGISTICS**

After placing your order, our team manages operations so your products are packed with care. Delivery may be arranged to best suit your schedule.

➔ DESIGN **SERVICES**

Our expert Sales team is dedicated to designing you a custom pipe network. They analyze, advise and assist you with a basic network diagram, a detailed plan and a full quote.

➔ TRAINING **SEMINARS**

Our Sales team provides product training classes or seminars for those who wish to incorporate energy efficiency into their sales and marketing strategies. Training can be conducted at your job site or any other location of your choice.

➔ AN INFORMATIVE CUSTOMER **SERVICE TEAM**

Our dedicated and knowledgeable support staff are on hand to assist you with placing orders, tracking shipments and technical questions.

➔ A DYNAMIC AND RESPONSIVE **SALES FORCE**

➔ OUR MARKETING DEPARTMENT **HELPS YOU DEVELOP YOUR BUSINESS**

Technical documents, sales tools, online media library, e-catalog.


.....
BY CHOOSING PREVOST, YOU ARE CONNECTED TO THE BEST SERVICE.
.....



**24/48-HOUR
DELIVERY**



**CUSTOMER
SERVICE TEAM**



**NETWORK
DESIGN**



**FLUID
TECHNOLOGY
EXPERTS**



**TRAINING
WORKSHOPS**

Connected to **efficiency**

To help drive your business forward, we provide a wide range of tools and resources for training and merchandising our products.



→ TECHNICAL
DOCUMENTS

→ ONLINE MEDIA LIBRARY /
E-CATALOG

→ MULTILINGUAL **WEBSITES**

→ **PACKAGING**

→ POS **MATERIALS**

→ RETAIL PACKAGING
FOR DISPLAY MERCHANDISING



**PREVOST frequently exhibits at trade shows
in the United States and abroad.**



**WE PROVIDE TOOLS & SOLUTIONS CONNECTED
TO EFFICIENCY.**



TABLE OF CONTENTS

CONNECTION

QUICK COUPLINGS & PLUGS


					
prevoS1 ISI 06 - 08 P. 15	prevoS1 metal ISI 11 P. 21	prevoS1 USI 06 -08 P. 23	prevoS1 metal USI 11 P. 29	prevoS1 ESI 07 P. 31	prevoS1 metal ESI 11 P. 38
					
prevoS1 ASI 06 P. 40	prevoS1 CSI 06 - 08 P. 43	prevoS1 ISC 06 - 08 P. 49	prevoS1 USC 06 - 08 P. 54	CSM 06 - 08 - 11 P. 60	PROLAC IRC 06 - 08 P. 69
					
PROLAC URC 06 - 08 P. 73	PROLAC ERC 07 P. 77	PROLAC ARC 06 P. 79	Stainless steel PROXI 06 P. 81	Metal IRM 06 P. 83	Water system ELS 09 P. 87

CONNECTORS

			
Push-to-connect fittings CONEX P. 93	Connectors P. 157	Valves P. 165	Sealing products P. 167

DISTRIBUTION

COMPRESSED AIR SYSTEMS

			
PPS System 100% aluminum network P. 176	Flexible link hoses P. 189	Wall manifolds P. 190	Mounting decks on HEA beam P. 203

HOSE REELS / HOSES AND CLAMPS



Hose reels
for compressed air

P 212



Hose reels
for water

P 219



Hose reels
for grease and oil

P 222



Polyurethane and
polyamide tubing

P 230



Bulk
hoses

P 233



Flexible shop
hoses

P 236



Spiral
hoses

P 243



Clamps

P 248



Protector

P 254



Balance reels
suspension arm

P 256

BLOW GUNS AND WASH GUNS



prevoS1
blow guns

P 262



27202
blow guns

P 275



Blow gun
kits

P 278



Wash guns
for water systems

P 284

TREATMENT

FILTRATION / TREATMENT



Compressed air
treatment units **ALTO 1**

P 291



Compressed air
treatment units **ALTO 2**

P 296



Compressed air
treatment units **ALTO 3**

P 301



Compressed air
treatment units **ALTO 4**

P 308



Air treatment units
on gantry

P 311



Gauges

P 313



Submicronic filters
MICRO AIR

P 321





















Automatic and
mechanical drain valves

P 331



Mechanical drain valves
PAM

P 333

Interchange	Profile	Plugs	Safety quick couplings prevoS1 composite body (XSI)	Safety quick couplings composite body (XSC)	Safety quick couplings metal body (XSM)	Standard quick couplings composite body (XRC)	Standard quick couplings metal body (XRM)
INDUSTRIAL INTERCHANGE 1/4"			 ISI 06	 ISC 06		 IRC 06	 IRM 06
INDUSTRIAL INTERCHANGE 3/8"			 ISI 08	 ISC 08		 IRC 08	
INDUSTRIAL INTERCHANGE 1/2"			 ISI 11				
HIGH FLOW INTERCHANGE 3/8"			 ESI 07			 ERC 07	
HIGH FLOW INTERCHANGE 1/2"			 ESI 11 CB  ESI 11				
AUTOMOTIVE INTERCHANGE 1/4"			 USI 06	 USC 06		 URC 06	
AUTOMOTIVE INTERCHANGE 3/8"			 USI 08	 USC 08		 URC 08	
AUTOMOTIVE INTERCHANGE 1/2"			 USI 11				
ARO 210 INTERCHANGE 1/4"			 ASI 06			 ARC 06	
ISO 6150 C INTERCHANGE 1/4"			 CSI 06		 CSM 06		
ISO 6150 C INTERCHANGE 3/8"			 CSI 08		 CSM 08		
ISO 6150 C INTERCHANGE 1/2"					 CSM 011		
BRITISH 1/4"			 BSI 06				

1

The **prevoS1**
range

The **prevoS1** coupling meets the top level of quality standards required in the professional industry.

The range is synonymous with top of the line quality, extended service life, advanced technology, safety and efficiency.

When used with PREVOST plugs, **prevoS1** couplings carry a three-year, leak-free guarantee. The **prevoS1** couplings are unrivalled in the market with quality, patent and protected technology.

Simple and
easy-to-use■ **Quick and effortless**

coupling: easy to connect, with no risk of damaging the internal mechanism.

■ **Decompression and disconnection of your**

pneumatic systems and tools in a single press: easy to use, enabling tools to be changed quickly on assembly lines.

■ **Swivel body creates a quick assembly and**

optimal positioning: cost savings from increased productivity and decreased labor requirements.

Certified **safety**■ **One push control to decompress the system and disconnect in complete safety:**

eliminates hose whip to protect the user, surrounding tools and equipment.

ISO 4414 standard

■ **Silicone free manufacturing:** avoids the risk of contaminating compressed air during the paint or varnish applications which can cause surface imperfections.■ **Anti-static construction:** external dust will not be attracted to painted or varnished surfaces from the creation of static electricity.■ **ATEX certification:** attests to the safety of **prevoS1** couplings in many industries (gaseous environments, paint booths, etc.). Equipment complies with requirements for zones classified as 1 & 2 (gas) and 21 & 22 (dust).

The **prevoS1** range



Ergonomically designed for long lasting comfort

- **Functionally designed to allow a natural grip and easy handling.**
- **Composite body material:** anti-scratch body material also allows user to create a firm grip on the coupling.
- **Compact and lightweight coupling** for maximum user comfort when handling repetitively. Provides accuracy and increases work station efficiency.

Long service life

- **Resistant to abrasion, vibrations, corrosion, impacts and crushing:** reinforced composite body is capable of withstanding the harsh conditions frequently found in production environments.

International compatibility

- **The most popular prevoS1 profiles** (Industrial, ISO 6150 C, High Flow, ARO 210, Automotive), meet the requirements of many international standards.
- **Color coded buttons make the wide selection of international profiles easy to identify:** this system reduces the risk of connection errors which may cause damages or accidents.

Industry standards

- **prevoS1 couplings comply with:**
 - The European Pressure Equipment Directive
 - The safety requirements of the ISO 4414 standard
 - The European RoHS Directive
 - ATEX classification 1 & 2 (gas) and 21 & 22 (dust).

Body *styles*

■ Available in different international profiles



Installation *types*

Parallel female thread

- BSPP
- International standard ISO 228/1



Parallel male thread

- BSPP
- Built-in gasket
- International standard ISO 228/1



Tapered female thread

- NPT according to ASME 1.20.1 standard
- BSPT according to ISO 7



Tapered male thread

- NPT according to ASME 1.20.1 standard
- BSPT according to ISO 7



Hose barb

- Assembled worm-drive or ear-type hose clamp




Bulkhead




Threaded swivel joint

- Scratch protection
- Rotation through 360° on two axes



Rotating coupling, parallel thread

- Built-in gasket
- Rotation through 360° on two axes




Single wall manifold

- Built-in manual drain



Double wall manifold

- Built-in manual drain



Coupling *identification*

- Color coded based on international profile
- Logical product code system
- Thread type engraved on the product

Example of product code:

ISI 061101SW

I	S	I	06	1	1	01		SW
A: ARO 210 B: British C: ISO C E: High Flow I: Industrial U: Automotive	S: Safety R: Regular	C: Coupling G: Grip P: Plug	06: Ø 6 mm - 1/4" 07: Ø 7.4 mm - 3/8" 08: Ø 8 mm - 3/8" 11: Ø 11 mm - 1/2"	1: Coupling 2: Penetration 6: Plug 8: Y	1: BSP 2: NPT 8: Hose barb	01: 1/4" female 02: 3/8" female 03: 1/2" female 04: 3/4" female 51: 1/4" male 52: 3/8" male 53: 1/2" male 54: 3/4" male	06: hose Ø 6 mm - 1/4" 08: hose Ø 8 mm - 5/16" 10: hose Ø 10 mm - 3/8" 13: hose Ø 13 mm - 1/2" 16: hose Ø 16 mm - 5/8" 19: hose Ø 19 mm - 3/4"	SW: swivel SE: rotation coupling HE: stainless steel version CB: composite body WK: wall manifold kit

The **prevoS1** range

Profiles	Product code	Quick safety couplings	Body size	Thread size	Flow rate at 6 bar ΔP 0.6 bar	Flow rate at 100 psi ΔP: 10 psi
INDUSTRIAL ISO 6150 B 6 MM - 1/4" 	ISI 06		6 mm 1/4"	BSP/NPT	833 l/min	34 cfm
INDUSTRIAL ISO 6150 B 8 MM - 3/8" 	ISI 08		8 mm 3/8"	BSP/NPT	2028 l/min	81 cfm
INDUSTRIAL ISO 6150 B 11 MM - 1/2" (STAINLESS STEEL BODY) 	ISI 11		11 mm 1/2"	BSP/NPT	3686 l/min	148 cfm
HIGH FLOW EUROPEAN 7.4 MM - 3/8" 	ESI 07		7.4 mm 3/8"	BSP/NPT	1820 l/min	73 cfm
HIGH FLOW EUROPEAN 7.4 MM - 3/8" 	ESI 07HE		7.4 mm 3/8"	BSP/NPT	1820 l/min	73 cfm
HIGH FLOW EUROPEAN 10.4 MM - 1/2" 	ESI 11CB		10.4 mm 1/2"	BSP/NPT	2040 l/min	81 cfm
HIGH FLOW EUROPEAN 10.4 MM - 1/2" (STAINLESS STEEL BODY) 	ESI 11		10.4 mm 1/2"	BSP/NPT	3530 l/min	142 cfm
ISO 6150 C 6 MM - 1/4" 	CSI 06		6 mm 1/4"	BSP/NPT	833 l/min	34 cfm
ISO 6150 C 8 MM - 3/8" 	CSI 08		8 mm 3/8"	BSP/NPT	2028 l/min	81 cfm
ARO 210 6 MM - 1/4" 	ASI 06		6 mm 1/4"	BSP/NPT	800 l/min	32 cfm
BRITISH 6 MM - 1/4" 	BSI 06		6 mm 1/4"	BSP	750 l/min	29 cfm
AUTOMOTIVE 6 MM - 1/4" 	USI 06		6 mm 1/4"	BSP/NPT	833 l/min	34 cfm
AUTOMOTIVE 8 MM - 3/8" 	USI 08		8 mm 3/8"	BSP/NPT	2028 l/min	81 cfm
AUTOMOTIVE 11 MM - 1/2" (STAINLESS STEEL BODY) 	USI 11		11 mm 1/2"	BSP/NPT	2987 l/min	120 cfm



Polymer **body**

- **Body:** composite body construction can withstand heavy duty applications
- **Other components:** steel or aluminum with RoHS compliant anti-corrosion treatment
- **Seal:** Nitrile NBR gasket



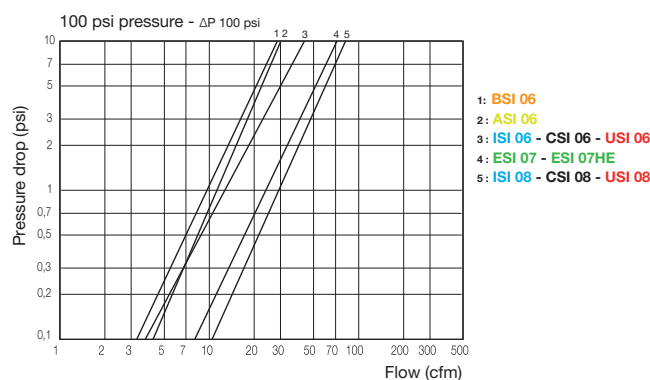
Advantages exclusive to the **prevoS1 composite body**

- **Ultra-lightweight**
2.5 Oz for couplings with 6 mm - 1/4" body
4 Oz for couplings with 8 mm - 3/8" body
- **Non-scratch**
No damage to delicate surfaces.
- **Anti-static** conducts electricity to avoid problems related to static electricity (ex. dust attracted to paint/polish or electronic work surfaces). Allows the coupling to meet ATEX Directive.
- **Service pressure range:** 29 to 174 psi (not suitable for vacuum)
- **Temperature:** +5°F to +158°F
- **Versatile coupling**
< 18 lbf at 90 psi for couplings with 1/4" clearance
< 22 lbf at 90 psi for couplings with 3/8" clearance
Unit of measurement lbf: pound-force
- **Applications**
 - All connections
 - Assembly lines (automotive, household appliances, etc.)
 - Mechanical manufacturing, machining workshops
 - Paper and printing industries
 - Automotive repairs
 - Textile industries
 - Wood and plastics industries
 - All work on fragile products
 - Technical education

Flow rate at 100 psi with ΔP of 10 psi

Profiles	Industrial 6 mm - 1/4"	ISO C 6 mm - 1/4"	ARO 6 mm - 1/4"	British 6 mm - 1/4"	Automotive 6 mm - 1/4"	High Flow 7.4 mm - 3/8"	Industrial 8 mm - 3/8"	ISO C 8 mm - 3/8"	Automotive 8 mm - 3/8"	High Flow 10.4 mm - 1/2"
PREVOST part number	ISI 06	CSI 06	ASI 06	BSI 06	USI 06	ESI 07	ISI 08	CSI 08	USI 08	ESI 11CB
Flow rate cfm	34	34	32	29	34	73	81	81	81	81
PREVOST compatible plug part numbers	IRP 06	CRP 06	ARP 06	BRP 06	URP 06	ERP 07	IRP 08	CRP 08	URP 08	ERP 11

Pneumatic flow rate / pressure loss curves



The **prevoS1** range

Stainless steel body

- **Body:** stainless steel with 17% chromium
- **Other components:** steel or aluminum with RoHS compliant anti-corrosion treatment
- **Seal:** Nitrile NBR gasket
- **Check valve and button:** composite



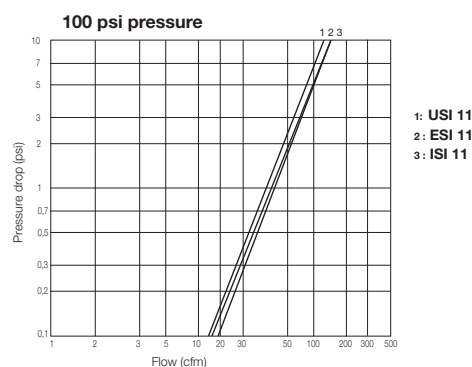
*Advantages exclusive to the **prevoS1** with 11 mm - 1/2" clearance*

- **Greater air flow** enabling users to work with even the largest pneumatic tools at full capacity.
- **Tough, high resistance couplings** suited to the most challenging conditions for which this type of product may be required, including violent impacts, crushing, dirty or damp environments, etc.
- **Recommended for heavy duty industries:** such as public works, ship building, heavy machinery, mining, offshore drilling, etc.
- **Anti-static** conducts electricity to avoid static related problems (ex. dust attracted to paint/polish or electronic work surfaces). Allows the coupling to meet ATEX Directive.
- **Service pressure range:** 29 to 174 psi (not suitable for vacuum)
- **Temperature:** +5°F to +158°F
- **Intuitive and easy to connect**
Quick to connect the plug into the coupling thanks to the innovative design of the internal locking mechanism.
- **Safe and effortless handling**
- **Connecting force at 90 psi**
< 36 lbf at 90 psi
Unit of measurement lbf: pound-force
- **Applications**
 - Tough locations
 - Harsh environments
 - Maintenance of industrial vehicles, agriculture, public works, mines and quarries, etc.
 - Heavy industry and manufacturing, iron and steel.

Flow rate at 100 psi with ΔP of 10 psi

Profiles	High Flow 10.4 mm - 1/2"	Industrial 11 mm - 1/2"	Automotive 11 mm - 1/2"
PREVOST part number	ESI 11	ISI 11	USI 11
Flow rate l/cfm	148	142	120
PREVOST compatible plug part numbers	ERP 11	IRP 11	URP 11

Pneumatic flow rate / pressure loss curves



PREVOS1 SAFETY QUICK COUPLING 1/4" INDUSTRIAL INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.677	1.181	20	-	-	1/4" FNPT	ISI 061201
		2.835	1.181	20	-	-	3/8" FNPT	ISI 061202
		3.11	1.181	23	-	-	1/2" FNPT	ISI 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.11	1.181	20	-	-	1/4" MNPT	ISI 061251
		3.11	1.181	20	-	-	3/8" MNPT	ISI 061252
		3.346	1.181	23	-	-	1/2" MNPT	ISI 061253

HOSE STEM COUPLER


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.268	1.181	0.764	-	-	1/4" Hose Barb	ISI 061806
		3.268	1.181	0.764	-	-	3/8" Hose Barb	ISI 061810

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		6.772	1.181	4.933	-	-	3/8" FNPT	ISI 061202SW

360° rotation in 2 axes

BULKHEAD COUPLER

		A (inch)	B (inch)	C (mm)	D (mm)	E (inch)	NPT female thread	Ø Drill (in)	Panel thickness (in)	Part Numbers
		3.307	1.181	29	32	-	1/4" FNPT	1.06	0.43	ISI 062201

PREVOS1 SAFETY QUICK COUPLING 1/4" INDUSTRIAL INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupler	Part Numbers
		2.008	1.969	1.496	2.736	0.256	1/2" FNPT	ISI 06	ISI 061203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ISI 06	ISI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 06	ISI 068204WK

NEW FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
		3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ISI 06	MF 204S4IS
		3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ISI 06	MF 204S6IS
		3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ISI 06	MF 204S8IS
		3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x ISI 06	MF 204S10IS

ASSOCIATED PRODUCTS

			
FLEXAIR hose extension with prevos1 coupling - p 238	prevos1 blow guns p 262	PPS1 aluminum fittings for pipe p 180	Enclosed hose reels DRF p 213

PLUG 1/4" INDUSTRIAL INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment


FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.614	17	1/4" FNPT	IRP 066201
		1.772	21	3/8" FNPT	IRP 066202



MALE THREAD PLUG


		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.693	14	1/4" MNPT	IRP 066251
		1.772	17	3/8" MNPT	IRP 066252



Teflon-coated thread

HOSE STEM PLUG


		A (inch)	B (inch)	For hose ID	Part Numbers
		1.929	-	1/4" Hose Barb	IRP 066806
		1.969	-	3/8" Hose Barb	IRP 066810




PREVOS1 SAFETY QUICK COUPLING 3/8" INDUSTRIAL INTERCHANGE




PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		3.126	1.299	23	-	-	1/4" FNPT	ISI 081201
		3.185	1.299	23	-	-	3/8" FNPT	ISI 081202
		3.539	1.299	23	-	-	1/2" FNPT	ISI 081203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.657	1.299	23	-	-	1/4" MNPT	ISI 081251
		3.657	1.299	23	-	-	3/8" MNPT	ISI 081252
		3.815	1.299	23	-	-	1/2" MNPT	ISI 081253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.795	1.299	0.89	-	-	3/8" Hose Barb	ISI 081810
		3.992	1.299	0.89	-	-	1/2" Hose Barb	ISI 081813

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		7.244	1.299	5.421	-	-	3/8" FNPT	ISI 081202SW
		360° rotation in 2 axes						

Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
81 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


BULKHEAD COUPLER

		A (inch)	B (inch)	C (mm)	D (mm)	E (inch)	NPT female thread	Ø Drill (in)	Panel thickness (in)	Part Numbers
		3.819	1.299	29	32	-	1/2" FNPT	1.06	0.43	ISI 082203

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ISI 08	ISI 081203WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ISI 08	ISI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 08	ISI 088204WK

ASSOCIATED PRODUCTS

		
Open hose reels DGO p 217	PPS1 aluminum fittings for pipe p 180	FLEXAIR hose extension with prevoS1 coupling - p 238


PLUG 3/8" INDUSTRIAL INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.772	17	1/4" FNPT	IRP 086201
		1.929	21	3/8" FNPT	IRP 086202
		2.087	25	1/2" FNPT	IRP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.087	17	1/4" MNPT	IRP 086251
		2.087	17	3/8" MNPT	IRP 086252
		2.323	27	1/2" MNPT	IRP 086253
		Teflon-coated thread			

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.106	-	3/8" Hose Barb	IRP 086810
		2.323	-	1/2" Hose Barb	IRP 086813
		2.362	-	5/8" Hose Barb	IRP 086816

PREVOS1 SAFETY QUICK COUPLING 1/2" INDUSTRIAL INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 232 psi


Flow rate at
100 psi
148 cfm
($\Delta P = 8.70$ psi)

ID Passage
1/2" body size


Temperature
+5°F to +158°F

Construction
Body: Stainless
steel


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		4.39	1.457	26	-	-	3/8" MNPT	ISI 111252
		4.547	1.457	26	-	-	1/2" MNPT	ISI 111253
		4.626	1.457	30	-	-	3/4" MNPT	ISI 111254


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		3.898	1.457	26	-	-	3/8" FNPT	ISI 111202
		3.992	1.457	26	-	-	1/2" FNPT	ISI 111203
		4.232	1.457	30	-	-	3/4" FNPT	ISI 111204


HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		5.354	1.457	0.394	-	-	3/8" Hose Barb	ISI 111810
		4.724	1.457	0.492	-	-	1/2" Hose Barb	ISI 111813
		4.724	1.457	0.61	-	-	5/8" Hose Barb	ISI 111816
		6.339	1.457	0.728	-	-	3/4" Hose Barb	ISI 111819


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ISI 11	ISI 111203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 11	ISI 118204WK


PLUG 1/2" INDUSTRIAL INTERCHANGE




ID Passage
1/2" body size

Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		2.362	25	3/8" FNPT	IRP 116202
		2.362	25	1/2" FNPT	IRP 116203
		2.362	25	3/4" FNPT	IRP 116204

MALE THREAD PLUG

		A (inch)	B (inch)	NPT male thread	Part Numbers
		2.31	0.685	3/8" MNPT	IRP 116252
		2.345	0.873	1/2" MNPT	IRP 116253
		2.4	1.05	3/4" MNPT	IRP 116254

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.559	-	3/8" Hose Barb	IRP 116810
		2.756	-	1/2" Hose Barb	IRP 116813
		2.717	-	5/8" Hose Barb	IRP 116816
		3.622	-	3/4" Hose Barb	IRP 116819

ASSOCIATED PRODUCTS

	
Open hose reels DLO p 218	PPS1 aluminum fittings for pipe p 180

PREVOS1 SAFETY QUICK COUPLING

1/4" AUTOMOTIVE PROFILE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.795	1.181	20	-	-	1/4" FNPT	USI 061201
		2.953	1.181	20	-	-	3/8" FNPT	USI 061202
		3.228	1.181	23	-	-	1/2" FNPT	USI 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.228	1.181	20	-	-	1/4" MNPT	USI 061251
		3.228	1.181	20	-	-	3/8" MNPT	USI 061252
		3.465	1.181	23	-	-	1/2" MNPT	USI 061253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.386	1.181	0.764	-	-	5/16" Hose Barb	USI 061808
		3.386	1.181	0.764	-	-	3/8" Hose Barb	USI 061810

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		6.89	1.181	5.051	-	-	3/8" FNPT	USI 061202SW

PREVOS1 SAFETY QUICK COUPLING 1/4" AUTOMOTIVE PROFILE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size

Temperature
+5°F to +158°F

Construction
Composite body

Highlight
Anti-static,
Non scratch

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 06	USI 061203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	USI 06	USI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 06	USI 068204WK

NEW FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
		3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x USI 06	MF 204S4US
		3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x USI 06	MF 204S6US
		3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x USI 06	MF 204S8US
		3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x USI 06	MF 204S10US

ASSOCIATED PRODUCTS

FLEXAIR hose extension with prevos1 coupling - p 238	prevos1 blow guns p 264	PPS1 aluminum fittings for pipe p 180	Enclosed hose reels DSF p 212


PLUG 1/4" AUTOMOTIVE INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment


FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.575	17	1/4" FNPT	URP 066201
		1.654	21	3/8" FNPT	URP 066202
		1.89	25	1/2" FNPT	URP 066203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.614	14	1/4" MNPT	URP 066251
		1.89	25	3/8" MNPT	URP 066252
		1.969	22	1/2" MNPT	URP 066253
		Teflon-coated thread			


HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.047	-	1/4" Hose Barb	URP 066806
		2.087	-	3/8" Hose Barb	URP 066810


PREVOS1 SAFETY QUICK COUPLING 3/8" AUTOMOTIVE PROFILE




PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		3.244	1.299	23	-	-	1/4" FNPT	USI 081201
		3.244	1.299	23	-	-	3/8" FNPT	USI 081202
		3.598	1.299	23	-	-	1/2" FNPT	USI 081203

MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.717	1.299	23	-	-	1/4" MNPT	USI 081251
		3.717	1.299	23	-	-	3/8" MNPT	USI 081252
		3.874	1.299	23	-	-	1/2" MNPT	USI 081253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		4.051	1.299	0.89	-	-	1/2" Hose Barb	USI 081813

Technology
"One push"
with a safety
system (avoids
hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
81 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		7.244	1.299	5.48	-	-	3/8" FNPT	USI 081202SW
		360° rotation in 2 axes						

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 08	USI 081203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	USI 08	USI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 08	USI 088204WK

ASSOCIATED PRODUCTS

		
FLEXAIR hose extension with prevoS1 coupling - p 238	Open hose reels DGO p 217	PPS1 aluminum fittings for pipe p 180


PLUG 3/8" AUTOMOTIVE INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

TAPERED FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.811	17	1/4" FNPT	URP 086201
		1.85	17	3/8" FNPT	URP 086202
		1.969	22	1/2" FNPT	URP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.811	17	1/4" MNPT	URP 086251
		1.85	17	3/8" MNPT	URP 086252
		1.969	22	1/2" MNPT	URP 086253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.362	-	3/8" Hose Barb	URP 086810
		2.598	-	1/2" Hose Barb	URP 086813

PREVOS1 SAFETY QUICK COUPLING 1/2" AUTOMOTIVE PROFILE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 232 psi


Flow rate at
100 psi
120 cfm
($\Delta P = 10$ psi)

ID Passage
1/2" body size


Temperature
+5°F to +158°F

Construction
Stainless steel


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		3.917	1.457	26	-	-	3/8" FNPT	USI 111202
		4.016	1.457	26	-	-	1/2" FNPT	USI 111203
		4.252	1.457	30	-	-	3/4" FNPT	USI 111204


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		4.409	1.457	26	-	-	3/8" MNPT	USI 111252
		4.567	1.457	26	-	-	1/2" MNPT	USI 111253
		4.646	1.457	30	-	-	3/4" MNPT	USI 111254


HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		5.374	1.457	0.394	-	-	3/8" Hose Barb	USI 111810
		4.74	1.457	0.492	-	-	1/2" Hose Barb	USI 111813
		6.358	1.457	0.728	-	-	3/4" Hose Barb	USI 111819

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 11	USI 111203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 11	USI 118204WK


PLUG 1/2" AUTOMOTIVE INTERCHANGE




ID Passage
1/2" body size

Construction
Treated steel
Corrosion-proof
treatment

FEMALE THREAD PLUG

		A (inch)	B (inch)	NPT female thread	Part Numbers
		2.047	0.748	3/8" FNPT	URP 116202
		2.283	0.984	1/2" FNPT	URP 116203
		2.244	1.181	3/4" FNPT	URP 116204

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.205	17	3/8" MNPT	URP 116252
		2.48	21	1/2" MNPT	URP 116253
		2.48	27	3/4" MNPT	URP 116254

Teflon-coated thread

ASSOCIATED PRODUCTS

	
Open hose reels DLO p 218	PPS1 aluminum fittings for pipe p 180

PREVOS1 SAFETY QUICK COUPLING

3/8" - HIGH FLOW INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
73 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.768	1.27	23	-	-	1/4" FNPT	ESI 071201
		2.827	1.27	23	-	-	3/8" FNPT	ESI 071202


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.299	1.27	23	-	-	1/4" MNPT	ESI 071251
		3.299	1.27	23	-	-	3/8" MNPT	ESI 071252
		3.457	1.27	23	-	-	1/2" MNPT	ESI 071253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.437	1.27	0.89	-	-	1/4" Hose Barb	ESI 071806
		3.437	1.27	0.89	-	-	3/8" Hose Barb	ESI 071810
		3.634	1.27	0.89	-	-	1/2" Hose Barb	ESI 071813

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		6.941	1.27	5.063	-	-	1/4" FNPT	ESI 071201SW
		360° rotation in 2 axes						

PREVOS1 SAFETY QUICK COUPLING 3/8" - HIGH FLOW INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

**Operating
pressure**
29 to 174 psi

**Flow rate at
100 psi**
73 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ESI 07	ESI 071203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ESI 07	ESI 078203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 07	ESI 078204WK

NEW FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
		3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ESI 07	MF 204S4ES
		3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ESI 07	MF 204S6ES
		3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ESI 07	MF 204S8ES
		3.071	8.465	2.48	8.465	0.256	3/4" FNPT	10 x ESI 07	MF 204S10ES

ASSOCIATED PRODUCTS

			
FLEXAIR hose extension with prevos1 coupling - p 240	prevos1 blow guns p 268	PPS1 aluminum fittings for pipe p 180	Enclosed hose reels DMF p 218


PLUG 3/8" HIGH FLOW INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.575	17	1/4" FNPT	ERP 076201
		1.614	21	3/8" FNPT	ERP 076202

MALE THREAD PLUG


		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.535	14	1/4" MNPT	ERP 076251
		1.614	17	3/8" MNPT	ERP 076252

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.752	-	1/4" Hose Barb	ERP 076806
		1.811	-	3/8" Hose Barb	ERP 076810
		2.028	-	1/2" Hose Barb	ERP 076813

PREVOS1 STAINLESS STEEL SAFETY QUICK COUPLING - 3/8" HIGH FLOW INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating pressure
29 to 174 psi

Flow rate at 100 psi
73 cfm
($\Delta P = 10$ psi)

ID Passage
3/8" body size


Temperature
+5°F to +158°F

Construction
Composite body
Stainless steel valve

Applications
Corrosive atmospheres


Highlight
Anti-static,
Non scratch

PARALLEL FEMALE THREAD COUPLER - STAINLESS STEEL




A (inch)	B (inch)	C (mm)	BSPP female thread	Part Numbers
2.886	1.268	23	1/4" FBSP	ESI 071101HE
2.886	1.268	26	3/8" FBSP	ESI 071102HE
3.161	1.268	26	1/2" FBSP	ESI 071103HE

PARALLEL MALE THREAD COUPLER - STAINLESS STEEL



A (inch)	B (inch)	C (mm)	BSPP male thread	Part Numbers
3.201	1.268	23	1/4" MBSP	ESI 071151HE
3.24	1.268	26	3/8" MBSP	ESI 071152HE
3.319	1.268	26	1/2" MBSP	ESI 071153HE

HOSE STEM COUPLER - STAINLESS STEEL



A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
3.437	1.268	0.906	3/8" Hose Barb	ESI 071810HE

STAINLESS STEEL PLUG


3/8" HIGH FLOW INTERCHANGE




ID Passage
3/8" body size

Construction
Stainless steel


MALE THREAD PLUG - STAINLESS STEEL

		A (inch)	B (mm)	BSPT male thread	Part Numbers
		1.398	13	1/4" MBSP	ERP 076151HE
		1.614	17	3/8" MBSP	ERP 076152HE
		Teflon-coated thread			


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	BSPP female thread	Part Numbers
		1.575	15	1/4" FBSP	ERP 076101HE
		1.614	21	3/8" FBSP	ERP 076102HE

HOSE STEM PLUG - STAINLESS STEEL

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.811	-	3/8" Hose Barb	ERP 076810HE

PREVOS1 SAFETY QUICK COUPLING 1/2" HIGH FLOW INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating pressure
29 to 174 psi

Flow rate at 100 psi
81 cfm
($\Delta P = 10$ psi)


ID Passage
1/2" body size

Temperature
+5°F to +158°F

Construction
Composite body


Highlight
Non scratch

PARALLEL FEMALE THREAD COUPLER




A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
3.287	1.343	23	3/8" FNPT	ESI 111202CB
3.642	1.343	23	1/2" FNPT	ESI 111203CB

MALE THREAD COUPLER



A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
3.76	1.343	23	3/8" MNPT	ESI 111252CB
3.917	1.343	23	1/2" MNPT	ESI 111253CB

HOSE STEM COUPLER



A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
3.898	1.343	0.394	3/8" Hose Barb	ESI 111810CB
4.094	1.343	0.492	1/2" Hose Barb	ESI 111813CB
4.094	1.343	0.61	5/8" Hose Barb	ESI 111816CB
4.094	1.343	0.728	3/4" Hose Barb	ESI 111819CB


PLUG 1/2" HIGH FLOW INTERCHANGE




ID Passage
1/2" body size

Construction
Treated steel
Corrosion-proof
treatment


FEMALE THREAD PLUG

		A (inch)	B (inch)	NPT female thread	Part Numbers
		1.575	0.827	3/8" FNPT	ERP 116202
		1.772	0.984	1/2" FNPT	ERP 116203
		1.85	1.26	3/4" FNPT	ERP 116204


MALE THREAD PLUG

		A (inch)	B (inch)	NPT male thread	Part Numbers
		1.693	1.26	3/8" MNPT	ERP 116252
		1.969	0.866	1/2" MNPT	ERP 116253
		2.087	1.063	3/4" MNPT	ERP 116254
		Teflon-coated thread			

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.732	-	3/8" Hose Barb	ERP 116810
		2.047	-	1/2" Hose barb	ERP 116813
		2.087	-	5/8" Hose Barb	ERP 116816
		3.11	-	3/4" Hose Barb	ERP 116819

PREVOS1 SAFETY QUICK COUPLING 1/2" HIGH FLOW INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 232 psi


Flow rate at
100 psi
142 cfm
($\Delta P = 10$ psi)

ID Passage
1/2" body size


Temperature
+5°F to +158°F

Construction
Body:
Stainless steel


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		3.563	1.457	26	-	-	3/8" FNPT	ESI 111202
		3.654	1.457	26	-	-	1/2" FNPT	ESI 111203
		3.898	1.457	30	-	-	3/4" FNPT	ESI 111204


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		4.055	1.457	26	-	-	3/8" MNPT	ESI 111252
		4.213	1.457	26	-	-	1/2" MNPT	ESI 111253
		4.291	1.457	30	-	-	3/4" MNPT	ESI 111254


HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		5.02	1.457	0.394	-	-	3/8" Hose Barb	ESI 111810
		4.386	1.457	0.492	-	-	1/2" Hose Barb	ESI 111813
		4.386	1.457	0.61	-	-	5/8" Hose Barb	ESI 111816
		6.004	1.457	0.728	-	-	3/4" Hose Barb	ESI 111819

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ESI 11	ESI 111203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 11	ESI 118204WK


PLUG 1/2" HIGH FLOW INTERCHANGE




ID Passage
1/2" body size

Construction
Treated steel
Corrosion-proof
treatment


FEMALE THREAD PLUG

		A (inch)	B (inch)	NPT female thread	Part Numbers
		1.575	0.827	3/8" FNPT	ERP 116202
		1.772	0.984	1/2" FNPT	ERP 116203
		1.85	1.26	3/4" FNPT	ERP 116204

MALE THREAD PLUG

		A (inch)	B (inch)	NPT male thread	Part Numbers
		1.693	1.26	3/8" MNPT	ERP 116252
		1.969	0.866	1/2" MNPT	ERP 116253
		2.087	1.063	3/4" MNPT	ERP 116254
		Teflon-coated thread			

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.732	-	3/8" Hose Barb	ERP 116810
		2.047	-	1/2" Hose barb	ERP 116813
		2.087	-	5/8" Hose Barb	ERP 116816
		3.11	-	3/4" Hose Barb	ERP 116819


ASSOCIATED PRODUCTS

	
Open hose reels DLO p 218	PPS1 aluminum fittings for pipe p 180


PREVOS1 SAFETY QUICK COUPLING 1/4" ARO 210 INTERCHANGE




PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.677	1.181	20	-	-	1/4" FNPT	ASI 061201
		2.835	1.181	20	-	-	3/8" FNPT	ASI 061202
		3.11	1.181	23	-	-	1/2" FNPT	ASI 061203

MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		3.11	1.181	20	-	-	1/4" MNPT	ASI 061251
		3.11	1.181	20	-	-	3/8" MNPT	ASI 061252
		3.346	1.181	23	-	-	1/2" MNPT	ASI 061253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.268	1.181	0.764	-	-	1/4" Hose Barb	ASI 061806
		3.268	1.181	0.764	-	-	3/8" Hose Barb	ASI 061810
		3.465	1.181	0.764	-	-	1/2" Hose Barb	ASI 061813

Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
32 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ASI 06	ASI 061203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ASI 06	ASI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ASI 06	ASI 068204WK


NEW FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
		3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ASI 06	MF 204S4AS
		3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ASI 06	MF 204S6AS
		3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ASI 06	MF 204S8AS
		3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x ASI 06	MF 204S10AS

ASSOCIATED PRODUCTS

			
FLEXAIR hose extension with prevoS1 coupling - p 238	27202 blow guns p 275	PPS1 aluminum fittings for pipe p 180	Enclosed hose reels DRF p 213


PLUG 1/4" ARO 210 INTERCHANGE



ID Passage
1/4" body size


Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG



A (inch)	B (mm)	NPT female thread	Part Numbers
1.575	17	1/4" FNPT	ARP 066201
1.732	21	3/8" FNPT	ARP 066202


MALE THREAD PLUG



A (inch)	B (mm)	NPT male thread	Part Numbers
1.614	14	1/4" MNPT	ARP 066251
1.732	17	3/8" MNPT	ARP 066252

Thread: Teflon-coated


HOSE STEM PLUG



A (inch)	B (inch)	For hose ID	Part Numbers
2.087	-	1/4" Hose Barb	ARP 066806
2.165	-	3/8" Hose Barb	ARP 066810

PREVOS1 SAFETY QUICK COUPLING

1/4" ISO 6150 C INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static,
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.165	1.063	20	-	-	1/4" FNPT	CSI 061201
		2.382	1.063	20	-	-	3/8" FNPT	CSI 061202
		2.618	1.063	26	-	-	1/2" FNPT	CSI 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		2.48	1.063	20	-	-	1/4" MNPT	CSI 061251
		2.559	1.063	23	-	-	3/8" MNPT	CSI 061252
		2.717	1.063	26	-	-	1/2" MNPT	CSI 061253

HOSE TAIL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		2.736	1.063	0.906	-	-	1/4" Hose Barb	CSI 061806
		2.736	1.063	0.906	-	-	3/8" Hose Barb	CSI 061810
		2.933	1.063	1.102	-	-	1/2" Hose Barb	CSI 061813

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		6.22	1.063	4.409	-	-	3/8" FNPT	CSI 061202SW
		360° rotation in 2 axes						

PREVOS1 SAFETY QUICK COUPLING 1/4" ISO 6150 C INTERCHANGE



Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size

Temperature
+5°F to +158°F

Construction
Composite body

Highlight
Anti-static,
Non scratch

BULKHEAD COUPLER

		A (inch)	B (inch)	C (mm)	D (mm)	E (inch)	NPT female thread	Ø Drill (in)	Panel thickness (in)	Part Numbers
		2.776	1.063	29	32	-	1/4" FNPT	1.06	0.43	CSI 062201

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	CSI 06	CSI 061203WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	CSI 06	CSI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	CSI 06	CSI 068204WK


NEW FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
		3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x CSI 06	MF 204S4CS
		3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x CSI 06	MF 204S6CS
		3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x CSI 06	MF 204S8CS
		3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x CSI 06	MF 204S10CS

ASSOCIATED PRODUCTS

prevos1 blow guns p 270	PPS1 aluminum fittings for pipe p 180	Enclosed hose reels DMF p 212


PLUG 1/4" ISO 6150 C INTERCHANGE




ID Passage
1/4" body size

Construction
Stainless steel


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.969	17	1/4" FNPT	CRP 066201
		2.126	24	3/8" FNPT	CRP 066202

PARALLEL MALE PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.89	14	1/4" MNPT	CRP 066251
		2.047	17	3/8" MNPT	CRP 066252


HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.441	-	1/4" Hose Barb	CRP 066806
		2.441	-	3/8" Hose Barb	CRP 066810
		2.441	-	1/2" Hose Barb	CRP 066813


PREVOS1 SAFETY QUICK COUPLING 3/8" ISO 6150 C INTERCHANGE




FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT female thread	Part Numbers
		2.657	1.26	23	-	-	1/4" FNPT	CSI 081201
		2.657	1.26	23	-	-	3/8" FNPT	CSI 081202
		2.972	1.26	26	-	-	1/2" FNPT	CSI 081203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	Part Numbers
		2.972	1.26	23	-	-	1/4" MNPT	CSI 081251
		3.012	1.26	23	-	-	3/8" MNPT	CSI 081252
		3.091	1.26	26	-	-	1/2" MNPT	CSI 081253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For hose ID	Part Numbers
		3.209	1.26	0.906	-	-	3/8" Hose Barb	CSI 081810
		3.406	1.26	1.102	-	-	1/2" Hose Barb	CSI 081813
		3.406	1.26	1.102	-	-	5/8" Hose Barb	CSI 081816

THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	Part Numbers
		6.654	1.26	4.843	-	-	3/8" FNPT	CSI 081202SW

360° rotation in 2 axes

Technology
"One push"
safety system
(avoids hose whip)

Operating
pressure
29 to 174 psi

Flow rate at
100 psi
81 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Anti-static
Non scratch


BULKHEAD COUPLER

		A (inch)	B (inch)	C (mm)	D (mm)	E (inch)	NPT female thread	Part Numbers
		3.228	1.26	29	32	-	1/2" FNPT	CSI 082203

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	CSI 08	CSI 081203WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	CSI 08	CSI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	CSI 08	CSI 088204WK

ASSOCIATED PRODUCTS

	
PPS1 aluminum fittings for pipe p 180	Open hose reels DGO p 217


PLUG 3/8" ISO 6150 C INTERCHANGE



ID Passage
3/8" body size


Construction
Stainless steel

PARALLEL FEMALE THREAD PLUG




A (inch)	B (mm)	NPT female thread	Part Numbers
2.244	19	1/4" FNPT	CRP 086201
2.323	24	3/8" FNPT	CRP 086202
2.441	24	1/2" FNPT	CRP 086203

PARALLEL MALE THREAD PLUG



A (inch)	B (mm)	NPT male thread	Part Numbers
2.165	19	1/4" MNPT	CRP 086251
2.205	16	3/8" MNPT	CRP 086252
2.362	24	1/2" MNPT	CRP 086253

HOSE STEM PLUG



A (inch)	B (inch)	For hose ID	Part Numbers
2.598	-	1/4" Hose Barb	CRP 086806
2.598	-	3/8" Hose Barb	CRP 086810
2.598	-	1/2" Hose Barb	CRP 086813
2.756	-	5/8" Hose Barb	CRP 086816

SAFETY QUICK COUPLING 1/4" INDUSTRIAL INTERCHANGE



Technology
Safety (avoid
hose whip)

**Operating
pressure**
0 to 174 psi

**Flow rate at
100 psi**
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.815	1.102	23	1/4" FNPT	ISC 061201
		3.13	1.102	23	3/8" FNPT	ISC 061202
		3.248	1.102	23	1/2" FNPT	ISC 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.13	1.102	23	1/4" MNPT	ISC 061251
		3.13	1.102	23	3/8" MNPT	ISC 061252
		3.209	1.102	23	1/2" MNPT	ISC 061253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.76	1.102	23	1/4" Hose Barb	ISC 061806
		3.76	1.102	23	3/8" Hose Barb	ISC 061810

FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		3.76	1.102	0.906	1/4" FNPT	ISC 061201FA
		3.76	1.102	0.906	3/8" FNPT	ISC 061202FA


PLUG 1/4" INDUSTRIAL INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.614	17	1/4" FNPT	IRP 066201
		1.772	21	3/8" FNPT	IRP 066202

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.693	14	1/4" MNPT	IRP 066251
		1.772	17	3/8" MNPT	IRP 066252

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.929	-	1/4" Hose Barb	IRP 066806
		1.969	-	3/8" Hose Barb	IRP 066810

SAFETY QUICK COUPLING

3/8" INDUSTRIAL INTERCHANCE



Technology
Safety
(avoid hose whip)

Operating pressure
0 to 174 psi

Flow rate at 100 psi
78 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		3.287	1.299	25	1/4" FNPT	ISC 081201
		3.327	1.299	25	3/8" FNPT	ISC 081202
		3.681	1.299	25	1/2" FNPT	ISC 081203

MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.563	1.299	25	1/4" MNPT	ISC 081251
		3.602	1.299	25	3/8" MNPT	ISC 081252
		3.681	1.299	25	1/2" MNPT	ISC 081253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		4.114	1.299	25	3/8" Hose Barb	ISC 081810
		4.114	1.299	25	1/2" Hose Barb	ISC 081813

SAFETY QUICK COUPLING 3/8" INDUSTRIAL INTERCHANGE



Technology
Safety
(avoid hose whip)

Operating
pressure
0 to 174 psi

Flow rate at
100 psi
78 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F

Construction
Composite body


Highlight
Non scratch

MALE SWIVEL THREAD COUPLER




A (inch)	B (inch)	C (inch)	NPT male thread	Part Numbers
7.291	2.697	1.575	1/4" MNPT	ISC 081251FA
7.291	2.697	1.575	3/8" MNPT	ISC 081252FA
7.291	2.697	1.575	1/2" MNPT	ISC 081253FA

SWIVEL FEMALE THREAD COUPLER




A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
7.291	2.697	1.575	3/8" FNPT	ISC 081202FA

SWIVEL HOSE COUPLER



A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
7.291	2.697	1.575	3/8" Hose Barb	ISC 081810FA
7.291	2.697	1.575	1/2" Hose Barb	ISC 081813FA


PLUG 3/8" INDUSTRIAL INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.772	17	1/4" FNPT	IRP 086201
		1.929	21	3/8" FNPT	IRP 086202
		2.087	25	1/2" FNPT	IRP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.087	17	1/4" MNPT	IRP 086251
		2.087	17	3/8" MNPT	IRP 086252
		2.323	27	1/2" MNPT	IRP 086253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.106	-	3/8" Hose Barb	IRP 086810
		2.323	-	1/2" Hose Barb	IRP 086813
		2.362	-	5/8" Hose Barb	IRP 086816

SAFETY QUICK COUPLING 1/4" AUTOMOTIVE INTERCHANGE



Technology
Safety
(avoid hose whip)

Operating
pressure
0 to 174 psi

Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.776	1.102	23	1/4" FNPT	USC 061201
		3.13	1.102	23	3/8" FNPT	USC 061202
		3.248	1.102	23	1/2" FNPT	USC 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.209	1.102	23	1/4" MNPT	USC 061251
		3.169	1.102	23	3/8" MNPT	USC 061252
		3.248	1.102	23	1/2" MNPT	USC 061253


HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.76	1.102	23	3/8" Hose Barb	USC 061810

FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		6.898	2.303	1.575	1/4" NPT	USC 061201FA

HOSE STEM SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		6.898	2.303	1.575	3/8" Hose Barb	USC 061810FA


PLUG 1/4" AUTOMOTIVE INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment

FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.575	17	1/4" FNPT	URP 066201
		1.654	21	3/8" FNPT	URP 066202
		1.89	25	1/2" FNPT	URP 066203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.614	14	1/4" MNPT	URP 066251
		1.89	25	3/8" MNPT	URP 066252
		1.969	22	1/2" MNPT	URP 066253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.047	-	1/4" Hose Barb	URP 066806
		2.087	-	3/8" Hose Barb	URP 066810

SAFETY QUICK COUPLING 3/8" AUTOMOTIVE INTERCHANGE



Technology
Safety
(avoid hose whip)

Operating
pressure
0 to 174 psi

Flow rate at
100 psi
78 cfm
($\Delta P = 10$ psi)


ID Passage
3/8" body size

Temperature
+5°F to +158°F

Construction
Composite body


Highlight
Non scratch

FEMALE THREAD COUPLER




A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
3.524	1.299	25	1/4" FNPT	USC 081201
3.524	1.299	25	3/8" FNPT	USC 081202
3.878	1.299	25	1/2" FNPT	USC 081203

MALE THREAD COUPLER



A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
3.917	1.299	25	1/4" MNPT	USC 081251
3.917	1.299	25	3/8" MNPT	USC 081252
4.075	1.299	25	1/2" MNPT	USC 081253

HOSE STEM COUPLER



A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
4.508	1.299	25	1/2" Hose Barb	USC 081813


PLUG 3/8" AUTOMOTIVE INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

TAPERED FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.811	17	1/4" FNPT	URP 086201
		1.85	17	3/8" FNPT	URP 086202
		1.969	22	1/2" FNPT	URP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.811	17	1/4" MNPT	URP 086251
		1.85	17	3/8" MNPT	URP 086252
		1.969	22	1/2" MNPT	URP 086253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.362	-	3/8" Hose Barb	URP 086810
		2.598	-	1/2" Hose Barb	URP 086813

2

CSM safety quick release coupling

CSM safety couplings combine reliability and high performance with technology that guarantees the couplings are safe, easy to use, leak free and durable.

■ ANTI-HOSE WHIP SAFETY MECHANISM

The **CSM range** offers two-press depressurization and uncoupling:

- **1**: automatic depressurization of the downline hose.
- **2**: safe uncoupling.

■ LEAK FREE

Each coupling is individually inspected before leaving the factory for a guaranteed leak free performance.

This significantly cuts energy costs.

■ PERFORMANCE

The design of **CSM** couplings actively enhances the efficiency of pneumatic facilities.

The mechanism is reliable and the couplings offer an excellent flow rate.



Complies with the safety requirements of the **ISO 4414** standard.

Flow rate at 100 psi - ΔP : 10 psi			Working pressure		Temperature	Weight
Ø 6 mm - 1/4" CSM 06	Ø 8 mm - 3/8" CSM 08	Ø 11 mm - 1/2" CSM 11	Ø 6 mm - 1/4" CSM 06	Ø 8 mm - 3/8" CSM 08 Ø 11 mm - 1/2" CSM 11		Couplings Ø 6 mm - 1/4" for hoses Ø 10 mm - 3/8"
34 cfm	85 cfm	165 cfm	0 to 232 psi	29 to 232 psi	+5°F to +158°F	from 2.4 Oz

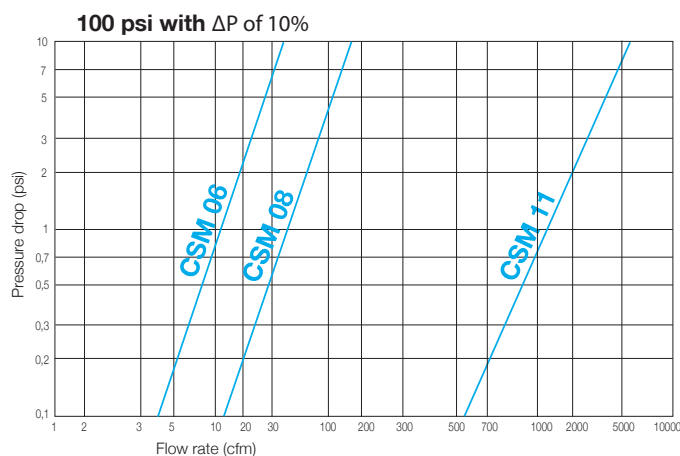
DURABLE

Materials used:

- Reinforced stainless steel body with 17% chromium
- One-piece lock: stainless steel with 13% chromium
- Streamlined valve and nitrile gasket
- Obturator: steel or aluminum with anti-corrosion treatment

Withstands:

- Abrasion
- Impacts
- Crushing
- Corrosion



COMPATIBILITY

Couplings are compatible with all international profile connections.

ISO 6150 series C interchange, 3 body sizes:

- 6 mm - 1/4", **CSM 06**
- 8 mm - 3/8", **CSM 08**
- 11 mm - 1/2", **CSM 11**



RoHS Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (lead, mercury, cadmium, hexavalent chromium, polybrominated bi-phenyls -PBBs- and polybrominated di-phenyl ethers -PBDEs-).

METAL SAFETY QUICK RELEASE COUPLINGS 1/4" - CSM 06



Technology
Safety (avoid
hose whip)

Operating
pressure
0 to 232 psi


Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size


Temperature
+5°F to +158°F

Highlight
Anti-static


TAPERED FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.008	0.866	20	1/4" FNPT	CSM 061201
		2.283	0.866	21	3/8" FNPT	CSM 061202
		2.441	0.866	25	1/2" FNPT	CSM 061203


TAPERED MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		2.323	0.866	20	1/4" MNPT	CSM 061251
		2.323	0.866	20	3/8" MNPT	CSM 061252
		2.48	0.866	23	1/2" MNPT	CSM 061253


HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		2.795	0.866	0.787	1/4" Hose Barb	CSM 061806
		2.795	0.866	0.787	3/8" Hose Barb	CSM 061810
		2.992	0.866	0.787	1/2" Hose Barb	CSM 061813

PARALLEL FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		4.055	0.945	-	3/8" FNPT 360° rotation in 2 axes	CSM 061202SW


PLUG 1/4" ISO 6150 C INTERCHANGE




ID Passage
1/4" body size

Construction
Stainless steel


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.969	17	1/4" FNPT	CRP 066201
		2.126	24	3/8" FNPT	CRP 066202

PARALLEL MALE PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.89	14	1/4" MNPT	CRP 066251
		2.047	17	3/8" MNPT	CRP 066252

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.441	-	1/4" Hose Barb	CRP 066806
		2.441	-	3/8" Hose Barb	CRP 066810
		2.441	-	1/2" Hose Barb	CRP 066813

METAL SAFETY QUICK RELEASE COUPLINGS 3/8" - CSM 08



Technology
Safety (avoid
hose whip)

Operating
pressure
29 to 232 psi


Flow rate at
100 psi
85 cfm
($\Delta P = 10$ psi)

ID Passage
3/8" body size


Temperature
+5°F to +158°F

Highlight
Anti-static


TAPERED FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.756	1.063	25	1/4" FNPT	CSM 081201
		2.756	1.063	25	3/8" FNPT	CSM 081202
		2.913	1.063	25	1/2" FNPT	CSM 081203


TAPERED MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		2.913	1.063	25	1/4" MNPT	CSM 081251
		2.913	1.063	25	3/8" MNPT	CSM 081252
		3.071	1.063	25	1/2" MNPT	CSM 081253

HOSE TAIL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		3.425	1.063	0.984	3/8" Hose Barb	CSM 081810
		3.622	1.063	0.984	1/2" Hose Barb	CSM 081813
		3.622	1.063	0.984	5/8" Hose Barb	CSM 081816

TAPERED FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		4.724	1.063	-	3/8" FNPT	CSM 081202SW

360° rotation in 2 axes


PLUG 3/8" ISO 6150 C INTERCHANGE




ID Passage
3/8" body size

Construction
Stainless steel


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		2.244	19	1/4" FNPT	CRP 086201
		2.323	24	3/8" FNPT	CRP 086202
		2.441	24	1/2" FNPT	CRP 086203

PARALLEL MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.165	19	1/4" MNPT	CRP 086251
		2.205	16	3/8" MNPT	CRP 086252
		2.362	24	1/2" MNPT	CRP 086253

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.598	-	1/4" Hose Barb	CRP 086806
		2.598	-	3/8" Hose Barb	CRP 086810
		2.598	-	1/2" Hose Barb	CRP 086813
		2.756	-	5/8" Hose Barb	CRP 086816

METAL SAFETY QUICK RELEASE COUPLINGS 1/2" - CSM 11



Technology
Safety
(avoid hose whip)

Operating
pressure
29 to 232 psi


Flow rate at
100 psi
165 cfm
($\Delta P = 10$ psi)

ID Passage
1/2" body size

Temperature
+5°F to +158°F


Highlight
Anti-static

TAPERED FEMALE THREAD COUPLER




A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
3.307	1.299	30	3/8" FNPT	CSM 111202
3.465	1.299	30	1/2" FNPT	CSM 111203
3.465	1.299	30	3/4" FNPT	CSM 111204

TAPERED MALE THREAD COUPLER



A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
3.74	1.299	30	3/8" MNPT	CSM 111252
3.898	1.299	30	1/2" MNPT	CSM 111253
4.055	1.299	30	3/4" MNPT	CSM 111254

HOSE TAIL COUPLER



A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
4.685	1.299	1.181	3/8" Hose Barb	CSM 111810
4.409	1.299	1.181	1/2" Hose Barb	CSM 111813
4.37	1.299	1.181	5/8" Hose Barb	CSM 111816
5.787	1.299	1.181	3/4" Hose Barb	CSM 111819

QUICK RELEASE PLUGS


1/2" - CRP 11




ID Passage
1/2" body size

Construction
Stainless steel


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		2.362	24	3/8" FNPT	CRP 116202
		2.598	27	1/2" FNPT	CRP 116203
		2.598	32	3/4" FNPT	CRP 116204

PARALLEL MALE THREAD PLUGS

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.638	24	3/8" MNPT	CRP 116252
		2.717	27	1/2" MNPT	CRP 116253
		2.835	32	3/4" MNPT	CRP 116254


HOSE STEM PLUGS

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.835	-	3/8" Hose Barb	CRP 116810
		2.835	-	1/2" Hose Barb	CRP 116813
		2.835	-	5/8" Hose Barb	CRP 116816
		3.78	-	3/4" Hose Bard	CRP 116819


EAR-CLAMP PROTECTORS

Highlight
Non scratch

RUBBER COUPLER PROTECTORS

		A (inch)	B (inch)	For tube OD (in)	Part Numbers
		3.937	1.161	1/4" - 3/8"	ECP S11417
		4.331	1.299	3/8" - 1/2"	ECP S11720
		Provides a 100% non-scratch connection between the prevoS1 coupling and the hose, by covering the ear-clamps			

NON-SCRATCH BOOT

		A (inch)	B (inch)	Compatible with	Part Numbers
		4.646	1.575	Rubber boot for swivel coupler FA	NSB FA

NON-SCRATCH BOOT

	A (inch)	B (inch)	Description	Part Numbers
	-	-	Short side non-Scratch boot for SW couplers	PSW SH08
	-	-	Long side non-scratch boot for SW couplers	PSW TL08

3

PROLAC

quick couplings



PROLAC couplings are easily connected by pushing the plug into the coupling. To disconnect instantaneously, simply press the button.

Tools equipped with compact and lightweight **PROLAC** couplings can be used for long periods of time without causing fatigue.

■ APPLICATIONS

- Assembly and finishing workshops
- Automotive paint shops
- Bodywork shops
- Woodworking shops



PROLAC couplings are connected to the end of an air hose to allow quick and direct connection of pneumatic tools or paint spray guns with the corresponding plugs.

Compact, lightweight, **non-scratch couplings**

■ COMPACT

The single-piece, perfectly cylindrical composite body enables the couplings to be used in all work environments.

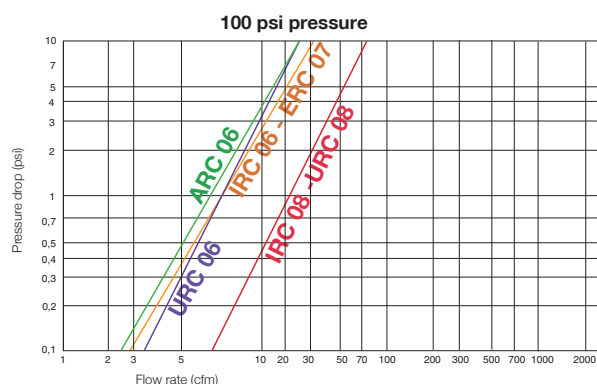
There are no parts overhanging outside the connector, avoiding accidental catching and disconnections.

■ NON-SCRATCH

If the coupling rubs against delicate surfaces, its reinforced polymer construction prevents the risk of scratches.

■ LIGHTWEIGHT

Prolac couplings are designed to enhance efficiency in the users movements because they are easy to use, lightweight and compact.



PROLAC quick couplings

Simple and safe **connection and disconnection**

■ To connect a **PROLAC** coupling, simply push the plug into the coupling.

To instantaneously disconnect, just a single thumb press on the button. The single press disconnection and shut off process feels natural.

■ Quick couplings paired with a PREVOST plug assure users a leak free performance:

- Plug on O-ring
- Valve gasket attached through the seat
- Core gasket in the shut off chamber

SWIVEL VERSION: FA



The 360° rotating axis allows for unrestricted movement. This swivel joint eliminates awkward movements in the hose from winding and twisting.

Users can move freely when using a paint spray gun, air tool or performing other precision work.

STAINLESS STEEL VERSION: PROXI



External construction: composite material compatible with corrosive atmospheres*

Internal construction: high-tensile stainless steel*

- Shut-off valve: 316L stainless steel

Fluids carried:


- Compressed air in a corrosive atmosphere
- Neutral gases, from +5°F to +140°F

*Call your Regional Sales Manager for availability.

■ TECHNICAL SPECIFICATIONS

Part numbers	Flow rate in l/min at 100 psi with ΔP : 10 psi	Working pressure	Temperature	Weight (1/4" FNPT coupling)
PROLAC Ø 1/4" (IRC 06)	32 cfm	0 to 174 psi	+5°F to +158°F	2.5 Oz
PROLAC Ø 3/8" (IRC 08)	78 cfm	0 to 174 psi	+5°F to +158°F	5.7 Oz
PROLAC Ø 1/4" (URC 06)	34 cfm	0 to 174 psi	+5°F to +158°F	3.8 Oz
PROLAC Ø 3/8" (URC 08)	78 cfm	0 to 174 psi	+5°F to +158°F	6.2 Oz
PROLAC Ø 3/8" (ERC 07)	34 cfm	0 to 174 psi	+5°F to +158°F	3.7 Oz
PROLAC Ø 1/4" (ARC 06)	25 cfm	0 to 174 psi	+5°F to +158°F	2.9 Oz
Stainless steel PROXI Ø 1/4" (PROXI 06)	32 cfm	0 to 174 psi	+5°F to +140°F	2.7 Oz

REGULAR QUICK COUPLING 1/4" INDUSTRIAL INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
32 cfm
($\Delta P = 10$ psi)

Temperature
+5°F to +158°F


Construction
Composite body

Highlight
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.126	1.102	23	1/4" FNPT	IRC 061201
		2.441	1.102	23	3/8" FNPT	IRC 061202
		2.559	1.102	23	1/2" FNPT	IRC 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		2.441	1.102	23	1/4" MNPT	IRC 061251
		2.441	1.102	23	3/8" MNPT	IRC 061252
		2.52	1.102	23	1/2" MNPT	IRC 061253


HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.071	1.102	23	1/4" Hose Barb	IRC 061806
		3.071	1.102	23	3/8" Hose Barb	IRC 061810
		3.071	1.102	23	1/2" Hose Barb	IRC 061813


FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		6.209	1.614	1.575	1/4" FNPT	IRC 061201FA

SWIVEL HOSE COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		6.209	1.614	1.575	3/8" Hose Barb	IRC 061810FA


PLUG 1/4" INDUSTRIAL INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.614	17	1/4" FNPT	IRP 066201
		1.772	21	3/8" FNPT	IRP 066202

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.693	14	1/4" MNPT	IRP 066251
		1.772	17	3/8" MNPT	IRP 066252
		Teflon-coated thread			

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.929	-	1/4" Hose Barb	IRP 066806
		1.969	-	3/8" Hose Barb	IRP 066810

ASSOCIATED PRODUCTS



STOFLEX hose extension
p 233



Ear clamp protector
p 66

REGULAR QUICK COUPLING

3/8" INDUSTRIAL INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
78 cfm
($\Delta P = 10$ psi)

ID Passage
3/8" body size


Temperature
+5°F to +158°F

Highlight
Non scratch


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		3.287	1.299	25	1/4" FNPT	IRC 081201
		3.327	1.299	25	3/8" FNPT	IRC 081202
		3.681	1.299	25	1/2" FNPT	IRC 081203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.563	1.299	25	1/4" MNPT	IRC 081251
		3.602	1.299	25	3/8" MNPT	IRC 081252
		3.681	1.299	25	1/2" MNPT	IRC 081253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		4.114	1.299	25	3/8" Hose Barb	IRC 081810
		4.311	1.299	25	1/2" Hose Barb	IRC 081813

HOSE STEM SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		7.283	2.677	1.417	1/4" Hose Barb	IRC 081806FA
		7.291	2.697	1.575	3/8" Hose Barb	IRC 081810FA
		7.291	2.697	1.575	1/2" Hose Barb	IRC 081813FA


PLUG 3/8" INDUSTRIAL INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.772	17	1/4" FNPT	IRP 086201
		1.929	21	3/8" FNPT	IRP 086202
		2.087	25	1/2" FNPT	IRP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		2.087	17	1/4" MNPT	IRP 086251
		2.087	17	3/8" MNPT	IRP 086252
		2.323	27	1/2" MNPT	IRP 086253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.106	-	3/8" Hose Barb	IRP 086810
		2.323	-	1/2" Hose Barb	IRP 086813
		2.362	-	5/8" Hose Barb	IRP 086816

REGULAR QUICK COUPLING

1/4" AUTOMOTIVE INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size


Temperature
+5°F to +158°F

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.776	1.102	23	1/4" FNPT	URC 061201
		3.13	1.102	23	3/8" FNPT	URC 061202
		3.248	1.102	23	1/2" FNPT	URC 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		3.209	1.102	23	1/4" MNPT	URC 061251
		3.169	1.102	23	3/8" MNPT	URC 061252
		3.248	1.102	23	1/2" MNPT	URC 061253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		3.76	1.102	0.906	3/8" Hose Barb	URC 061810

FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		6.898	2.303	1.575	1/4" FNPT	URC 061201FA
		6.898	2.303	1.575	3/8" FNPT	URC 061202FA

HOSE STEM SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		6.898	2.303	1.575	1/4" Hose Barb	URC 061806FA
		6.898	2.303	1.575	3/8" Hose Barb	URC 061810FA


PLUG 1/4" AUTOMOTIVE INTERCHANGE



ID Passage
1/4" body size


Construction
Treated steel
Corrosion-proof
treatment

FEMALE THREAD PLUG



A (inch)	B (mm)	NPT female thread	Part Numbers
1.575	17	1/4" FNPT	URP 066201
1.654	21	3/8" FNPT	URP 066202
1.89	25	1/2" FNPT	URP 066203


MALE THREAD PLUG



A (inch)	B (mm)	NPT male thread	Part Numbers
1.614	14	1/4" MNPT	URP 066251
1.89	25	3/8" MNPT	URP 066252
1.969	22	1/2" MNPT	URP 066253

Teflon-coated thread

HOSE STEM PLUG



A (inch)	B (inch)	For hose ID	Part Numbers
2.047	-	1/4" Hose Barb	URP 066806
2.087	-	3/8" Hose Barb	URP 066810

REGULAR QUICK COUPLING

3/8" AUTOMOTIVE INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
78 cfm
($\Delta P = 10$ psi)

ID Passage
3/8" body size


Temperature
+5°F to +158°F

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		3.524	1.299	25	1/4" FNPT	URC 081201
		3.524	1.299	25	3/8" FNPT	URC 081202
		3.878	1.299	25	1/2" FNPT	URC 081203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.917	1.299	25	1/4" MNPT	URC 081251
		3.917	1.299	25	3/8" MNPT	URC 081252
		4.114	1.299	25	1/2" MNPT	URC 081253


HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		4.311	1.299	25	3/8" Hose Barb	URC 081810
		4.508	1.299	25	1/2" Hose Barb	URC 081813

FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		7.488	2.894	1.575	1/4" FNPT	URC 081201FA
		7.488	2.894	1.575	3/8" FNPT	URC 081202FA

HOSE STEM SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		7.488	2.894	1.575	1/2" Hose Barb	URC 081813FA


PLUG 3/8" AUTOMOTIVE INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment

TAPERED FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.811	17	1/4" FNPT	URP 086201
		1.85	17	3/8" FNPT	URP 086202
		1.969	22	1/2" FNPT	URP 086203

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.811	17	1/4" MNPT	URP 086251
		1.85	17	3/8" MNPT	URP 086252
		1.969	22	1/2" MNPT	URP 086253

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.362	-	3/8" Hose Barb	URP 086810
		2.598	-	1/2" Hose Barb	URP 086813

REGULAR QUICK RELEASE COUPLING 3/8" HIGH FLOW INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
34 cfm
($\Delta P = 10$ psi)

ID Passage
3/8" body size


Temperature
+5°F to +158°F

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.815	1.102	23	1/4" FNPT	ERC 071201
		3.13	1.102	23	3/8" FNPT	ERC 071202
		3.248	1.102	25	1/2" FNPT	ERC 071203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		3.13	1.102	23	1/4" MNPT	ERC 071251
		3.13	1.102	23	3/8" MNPT	ERC 071252
		3.209	1.102	23	1/2" MNPT	ERC 071253


HOSE TAIL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		3.76	1.102	0.906	1/4" Hose Barb	ERC 071806
		3.76	1.102	0.906	3/8" Hose Barb	ERC 071810
		3.957	1.102	0.906	1/2" Hose Barb	ERC 071813

FEMALE THREAD SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		6.898	2.303	1.575	1/4" FNPT	ERC 071201FA
		6.898	2.303	1.575	3/8" FNPT	ERC 071202FA

HOSE STEM SWIVEL COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		6.898	2.303	1.575	3/8" Hose Barb	ERC 071810FA


PLUG 3/8" HIGH FLOW INTERCHANGE




ID Passage
3/8" body size

Construction
Treated steel
Corrosion-proof
treatment


FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.575	17	1/4" FNPT	ERP 076201
		1.614	21	3/8" FNPT	ERP 076202

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.535	14	1/4" MNPT	ERP 076251
		1.614	17	3/8" MNPT	ERP 076252
		Teflon-coated thread			

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.752	-	1/4" Hose Barb	ERP 076806
		1.811	-	3/8" Hose Barb	ERP 076810
		2.028	-	1/2" Hose Barb	ERP 076813

REGULAR QUICK COUPLING

1/4" ARO 210 INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi


Flow rate at
100 psi
25 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size


Temperature
+5°F to +158°F

Highlight
Non scratch


FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.126	1.102	23	1/4" FNPT	ARC 061201
		2.441	1.102	23	3/8" FNPT	ARC 061202
		2.52	1.102	23	1/2" FNPT	ARC 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		2.441	1.102	23	1/4" MNPT	ARC 061251
		2.441	1.102	23	3/8" MNPT	ARC 061252
		2.52	1.102	23	1/2" MNPT	ARC 061253

HOSE STEM COUPLER

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		3.071	1.102	0.906	3/8" ID hose	ARC 061810


PLUG 1/4" ARO 210 INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment

PARALLEL FEMALE THREAD PLUG


		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.575	17	1/4" FNPT	ARP 066201
		1.732	21	3/8" FNPT	ARP 066202

MALE THREAD PLUG

		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.614	14	1/4" MNPT	ARP 066251
		1.732	17	3/8" MNPT	ARP 066252


Thread: Teflon-coated

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		2.087	-	1/4" Hose Barb	ARP 066806
		2.165	-	3/8" Hose Barb	ARP 066810

STAINLESS STEEL QUICK RELEASE COUPLING

1/4" INDUSTRIAL INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi

Flow rate at
100 psi
32 cfm
($\Delta P = 10$ psi)

ID Passage
1/4" body size


Temperature
+5°F to +158°F

Construction
Composite body
Stainless steel
valve


Applications
Corrosive
atmospheres

Highlight
Non scratch


PARALLEL FEMALE THREAD COUPLER - STAINLESS STEEL

		A (inch)	B (inch)	C (mm)	BSPP female thread	Part Numbers
		2.126	1.102	23	1/4" FBSP	PROXI 061101
		2.441	1.102	23	3/8" FBSP	PROXI 061102
		2.559	1.102	25	1/2" FBSP	PROXI 061103


PARALLEL MALE THREAD COUPLER - STAINLESS STEEL

		A (inch)	B (inch)	C (mm)	BSPP male thread	Part Numbers
		2.441	1.102	23	1/4" MBSP	PROXI 061151
		2.441	1.102	23	3/8" MBSP	PROXI 061152
		2.52	1.102	23	1/2" MBSP	PROXI 061153


HOSE STEM COUPLER - STAINLESS STEEL

		A (inch)	B (inch)	C (inch)	For hose ID	Part Numbers
		3.071	1.102	0.906	1/4" Hose Barb	PROXI 061806
		3.071	1.102	0.906	3/8" Hose Barb	PROXI 061810


PARALLEL FEMALE THREAD PLUG - STAINLESS STEEL

		A (inch)	B (mm)	C (inch)	BSPP female thread	Part Numbers
		1.575	17	-	1/4" FBSP	PROXI 066101

MALE THREAD PLUG - STAINLESS STEEL

		A (inch)	B (mm)	C (mm)	BSPT male thread	Part Numbers
		2.559	17	17	1/4" MBSP	PROXI 066151
		2.559	17	20	3/8" MBSP	PROXI 066152

HOSE STEM PLUG - STAINLESS STEEL

		A (inch)	B (mm)	C (inch)	For hose ID	Part Numbers
		2.717	17	-	1/4" Hose Barb	PROXI 066806
		2.717	17	-	3/8" Hose Barb	PROXI 066810

4

Metal quick release couplings **IRM**

With its metal body, this rugged coupling is ideal for heavy duty applications.

■ DURABLE

The metal body can stand up to the toughest environments:

- Entire internal and external body: anti-corrosion treated steel
- Seals: nitrile
- Valve: polyacetal

This tough, metal quick release coupling can withstand:

- Abrasion
- Heavy impacts
- Crushing
- Corrosion



IRM

Fluid compliant: compressed air

■ LEAK FREE


Each coupling is individually inspected before leaving the factory for a guaranteed leak free performance.

■ PERFORMANCE

- Metal quick release couplings enhance the efficiency of air powered systems.
- Allows one handed operation.
- Coupling offers a consistent and reliable flow rate.
- Push button offers an effortless automatic connection which is instantaneous (< 22.5 lbf).

■ COMPATIBILITY

Couplings are compatible with the Industrial profile.



■ TECHNICAL SPECIFICATIONS

	Flow rate at 100 psi with ΔP: 10 psi	Working pressure	Temperature	Weight (8 mm hose)
IRM 06	30 cfm	0 - 174 psi	+5°F to +158°F	From 3.8 Oz

REGULAR METAL QUICK RELEASE COUPLING

1/4" INDUSTRIAL INTERCHANGE



Technology
Push button

Operating
pressure
0 to 174 psi

Flow rate at
100 psi
30 cfm
($\Delta P = 10$ psi)


ID Passage
1/4" body size

Temperature
+5°F to +158°F


Construction
Treated steel

Highlight
Anti-static


PARALLEL FEMALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
		2.067	1.024	23	1/4" FNPT	IRM 061201
		2.382	0.906	23	1/2" FNPT	IRM 061203


MALE THREAD COUPLER

		A (inch)	B (inch)	C (mm)	NPT male thread	Part Numbers
		2.382	0.906	23	1/4" MNPT	IRM 061251
		3.012	1.024	23	3/8" MNPT	IRM 061252

HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.012	1.024	23	1/4" Hose Barb	IRM 061806
		3.012	1.024	23	3/8" Hose Barb	IRM 061810

PLUG 1/4" INDUSTRIAL INTERCHANGE




ID Passage
1/4" body size

Construction
Treated steel
Corrosion-proof
treatment


PARALLEL FEMALE THREAD PLUG

		A (inch)	B (mm)	NPT female thread	Part Numbers
		1.614	17	1/4" FNPT	IRP 066201
		1.772	21	3/8" FNPT	IRP 066202

MALE THREAD PLUG


		A (inch)	B (mm)	NPT male thread	Part Numbers
		1.693	14	1/4" MNPT	IRP 066251
		1.772	17	3/8" MNPT	IRP 066252

Teflon-coated thread

HOSE STEM PLUG

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.929	-	1/4" Hose Barb	IRP 066806
		1.969	-	3/8" Hose Barb	IRP 066810

ELS

Quick couplings

Universal couplings **for low pressure water systems**

The design and construction materials used to manufacture the **ELS couplings** is ideal for running cold water systems with or without cleaning agents. They are rugged enough to withstand harsh operating environments.

■ APPLICATIONS

- Maintenance, cleaning, washing, supply to cleaning machines or washing spray guns.
- Water couplings for industrial, construction, food processing, car washes and water spigots.
- Agricultural or public works watering applications.



■ AUTOMATIC CONNECTION


Push the plug into the coupling for a quick and easy connection. Release the connection by pulling the knurled locking ring back.



■ COMPATIBILITY

The connection profiles of the **ELS** couplings and **ELP** plugs are interchangeable with the most popular style water couplings.

An **ELP** plug or an **ELS** coupling can be connected to the majority of existing plastic or brass products with the same clearance diameter.



■ SEALING

The valve-gasket-spring technology used in couplings with a shut-off valve, ensures a perfect seal on coupling and uncoupling.

The Garden hose thread coupling and plug is fitted with a flat gasket (3/4" GHT) clipped in the thread base.



■ STRENGTH

The superior design of PREVOST couplings and plugs offer excellent reliability under pressure, even in harsh conditions.

The materials used ensure that the **ELS** range offers excellent corrosion resistance.

ELS quick couplings

■ CONFIGURATIONS

- **Coupling with shut-off valve:**

When uncoupled, the coupling automatically shuts off the water supply.

- **Full-flow coupling:**

Without a valve, when disconnected, the the water supply stays open.
This coupling has a higher flow rate than the coupling with a shut-off valve.

- **Adaptor with a shut off valve:**


When disconnected, a one-way valve shuts off the downstream water supply.

- **Full-flow plug:**

Plug maintains a constant open flow of water.
Higher flow rate than the option with a shut off valve.



Potential combinations



Coupling Plug

■ ACCESSORIES

Various accessories can be used to adapt the circuit depending on its configuration:

- Joiners
- Two-way and three-way adapters
- Two-way control valves
- Ball valves



Ball valve

■ SPECIFICATIONS

Clearance diameter (mm)	9 mm
Water flow rate (GPM) $\Delta P = 4.35$ psi: Coupling with shut-off valve and full-flow adapter Coupling without shut-off valve and full-flow adapter	6.34 GPM 8.85 GPM
Maximum working pressure (psi): With Prevost ELP 09 adapter With plastic adapter	145 psi 73 psi
Coupling temperature range: With brass adapter With plastic adapter	+5°F to +140°F +34°F to +104°F
Materials: Body Needle Valve Spring Gaskets	Chrome-plated brass Stainless steel Composite Stainless steel NBR

RELATED PRODUCT

Industrial wash down guns



CHROME PLATED QUICK COUPLINGS FOR WATER SYSTEM

Operating
pressure
0 to 145 psi


Flow rate
6.34 GPM ($\Delta P = 4.35$ psi
valved coupling),
8.85 GPM ($\Delta P = 4.35$ psi
straight through-coupling)

ID Passage
9 mm

Temperature
+5°F to +140°F


Construction
Brass body

FEMALE UNVALVED COUPLER

		A (inch)	B (inch)	C (mm)	GHT female thread	NPT female thread	Part Numbers
		2.402	1.378	30		3/4" FNPT	ELS 090204
		2.402	1.378	30	3/4" FGHT		ELS 090304


Flow: $\Delta P = 4.35$ psi: 8.85 GPM
Free passage

FEMALE VALVED COUPLER


		A (inch)	B (inch)	C (mm)	GHT female thread	NPT female thread	Part Numbers
		2.402	1.378	30		3/4" FNPT	ELS 091204
		2.402	1.378	30	3/4" FGHT		ELS 091304

Flow: $\Delta P = 4.35$ psi: 6.34 GPM
Shutter coupling: cuts off the flow when disconnected

STRAIGHT-THROUGH HOSE STEM COUPLER

		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.504	1.378	30	3/4" Hose Barb	ELS 090819
		Flow: $\Delta P = 4.35$ psi: 8.85 GPM Free passage				

VALVED HOSE STEM COUPLER


		A (inch)	B (inch)	C (mm)	For hose ID	Part Numbers
		3.504	1.378	30	3/4" Hose Barb	ELS 091819
		Flow: $\Delta P = 4.35$ psi: 6.34 GPM Shutter coupling: cuts off the flow when disconnected				

GASKET FOR ELS COUPLER


	A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
	-	-	-	Gasket for ELS coupler Thread: 3/4" FGHT	ELS JP34

WATER PLUGS


CHROME PLATED QUICK COUPLINGS FOR WATER SYSTEM

		A (inch)	B (mm)	BSPP male thread	Part Numbers
		1.732	27	3/4" FGHT	ELP 096354
					

FEMALE THREAD PLUG

		A (inch)	B (mm)	GHT female thread	NPT female thread	Part Numbers
		1.654	30		3/4" FNPT	ELP 096204
		1.654	30	3/4" FGHT		ELP 096304

HOSE STEM COUPLER

		A (inch)	B (mm)	For hose ID	Part Numbers
		2.756	30	3/4" Hose Barb	ELP 096819
					

Operating
pressure
0 to 145 psi

Flow rate
6.34 GPM ($\Delta P = 4.35$ psi
valved coupling),
8.85 GPM ($\Delta P = 4.35$ psi
straight through-coupling)

ID Passage
9 mm

Temperature
+5°F to +140°F

Construction
Chrome-plated
brass body


O- RING FOR ELP CONNECTORS

	A (inch)	B (inch)	Description	Part Numbers
	-	-	O ring for ELP connectors	ELP JT




EQUAL JOINER FOR COUPLERS

	A (inch)	B (inch)	Description	Part Numbers
	1.969	-	Joins 2 couplings	ELP 096002

Y CONNECTOR

	A (inch)	B (inch)	Description	Part Numbers
	2.402	2.677	Joins 3 couplings	ELP 096003

6

CONEX push-to-connect fittings

A comprehensive **high performance range**

- Fixed equipment fittings, with Teflon-coated tapered threads or parallel threads with gasket
- Interconnection fittings for tube-to-tube connections
- Functional fittings: valves, flow regulators
- Compact micro-fittings

Push-to-connect fittings

polymer body





→ lightweight and tough



■ INSTALLATION

- Safe and easy to install with Teflon coated tapered threads and cylindrical threads with gasket
- Slimline fittings require little space
- Wide range of configurations available for various applications related to pneumatic wiring, cylinders, control valves, pneumatic controls, etc.
- Optimized angled outlet ports
- Easy to attach and align via the one or two eyelets



Threads			
	Teflon-coated tapered threads	NPT	1/8" to 1/2"
	Parallel threads with NBR gasket at bottom of groove	BSPP	G 1/8 - G 1/2
	Parallel threads with NBR gasket at bottom of groove	UNF	10 - 32
	Parallel threads with NBR gasket at bottom of groove	Metric	M3 and M5



REACH regulations on the improvement of the management of risks related to the usage and dangerous properties of chemicals manufactured in or imported into the EU.



The 6 panel profile inside the fittings allows easy installation. This system facilitates the installation of fittings in difficult to access areas.

The polymer range of fittings are equipped with a movable shell. The shell can be adjusted after installation to allow for compact and precise orientation.

■ CONNECTION - DISCONNECTION

- Easy to handle
- Easy to push-to-connect
- Easy to install due to ring self-positioning system
- Excellent connection, even in the harshest conditions (vibrations, misalignment, etc.)

■ LEAK FREE

- Creates an instant seal
- Solid grip of the tube in the fitting
- Vibration resistance



■ OPERATION

The connection between the tube and fitting is made simply by pushing the tube into the fitting.

The tube must be cut square and inserted fully into the fitting. A system of stainless steel teeth holds the tube in place.

The seal between the tube and the fitting is made by a lip seal, protected by a metal sleeve located between the seal and the teeth. The tube can be disconnected by pushing the release collar, which pushes the teeth and releases the tube from the fitting.

■ OPERATING PRESSURE AND TEMPERATURES

CONEX fittings

	Polymer body / RP
Fluids	Compressed air
Working pressure	0 to 145 psi
Operating temperature	+32°F to +140°F
Recommended tubes	Polyurethane ether or ester and polyamide

Pressure resistance with specified use: - for a 30 in Hg vacuum (99.9% vacuum)
- for a maximum working pressure of 145 psi (for polymers only)

ASSOCIATED PRODUCTS

Polyurethane and polyamide tubes

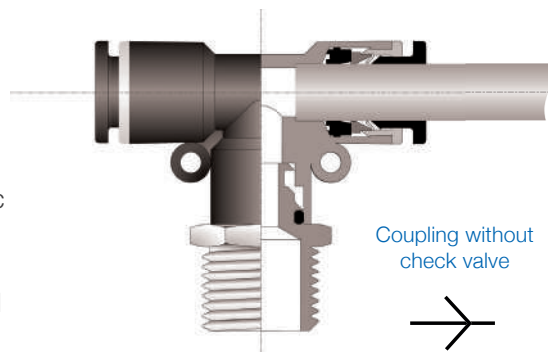


Push-to-connect fittings **CONEX**

Fixed equipment **couplings** *Tube-to-tube* **interconnection** **fittings**

A wide range of fittings are available to meet all pneumatic configurations: straight fittings, unions, elbows, T fittings, Y fittings, cross fittings, triple unions and stoppers.

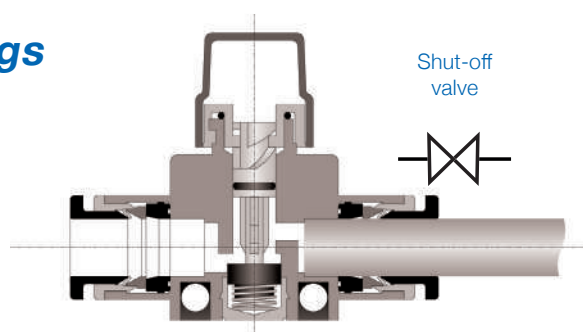
CONEX push-to-connect fittings are specifically designed for connecting thermoplastic tubes and are suited for pneumatic systems in all industries.



Functional **push-to-connect fittings**

■ VALVE

Function: blocking air flow in both directions.



Thread/Tube



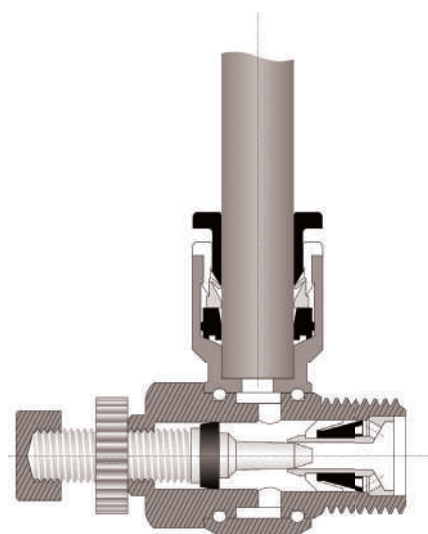
Thread/Thread



Tube/Tube

■ FLOW RATE REGULATOR

The air flow passage is regulated using the adjustment knob or screw. The flow can be open in one direction and blocked in another. Threads are tapered and coated with Teflon or parallel with a gasket.






Outlet flow rate
(OUT)



Inlet flow rate
limiter (IN)



Two-way
limiter



CONEX PUSH-TO-CONNECT FITTINGS


Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

CONNECTORS


MALE CONNECTOR - METRIC TUBE TO MALE BSPT - RPD MR




A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
0.827	0.453	10	0.531	-	1/8" MBSP	4	RPD MR0400
0.787	0.63	14	0.433	-	1/4" MBSP	4	RPD MR0401
0.866	0.551	12	0.571	-	1/8" MBSP	6	RPD MR0600
0.827	0.63	14	0.472	-	1/4" MBSP	6	RPD MR0601
0.906	0.768	17	0.472	-	1/8" MBSP	6	RPD MR0602
1.004	0.945	21	0.492	-	1/2" MBSP	6	RPD MR0603
1.063	0.63	14	0.768	-	1/8" MBSP	8	RPD MR0800
0.945	0.63	14	0.591	-	1/4" MBSP	8	RPD MR0801
0.965	0.768	17	0.531	-	1/8" MBSP	8	RPD MR0802
1.024	0.945	21	0.512	-	1/2" MBSP	8	RPD MR0803
1.102	0.768	17	0.807	-	1/8" MBSP	10	RPD MR1000
1.142	0.768	17	0.787	-	1/4" MBSP	10	RPD MR1001
1.063	0.768	17	0.63	-	1/8" MBSP	10	RPD MR1002
1.024	0.945	21	0.512	-	1/2" MBSP	10	RPD MR1003
1.299	0.866	19	0.945	-	1/4" MBSP	12	RPD MR1201
1.161	0.866	19	0.728	-	1/8" MBSP	12	RPD MR1202
1.083	0.945	21	0.315	-	1/2" MBSP	12	RPD MR1203
1.303	0.984	22	0.87	-	1/8" MBSP	14	RPD MR1402
1.228	0.984	22	0.717	-	1/2" MBSP	14	RPD MR1403
1.378	1.083	24	0.945	-	1/8" MBSP	16	RPD MR1602
1.299	1.083	24	0.787	-	1/2" MBSP	16	RPD MR1603

CONEX PUSH-TO-CONNECT FITTINGS

MALE CONNECTOR - FRACTIONAL INCH TUBE TO MALE NPT - RPD MR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.827	0.315	7/16	0.63	0.394	1/8" MNPT	1/8	RPD MR1820
		0.827	0.315	7/16	0.63	0.394	1/8" MNPT	5/32	RPD MR5320
		0.846	0.433	9/16	0.63	0.394	1/4" MNPT	5/32	RPD MR5321
		0.827	0.315	7/16	0.63	0.504	1/8" MNPT	3/16	RPD MR3120
		0.846	0.433	9/16	0.63	0.504	1/4" MNPT	3/16	RPD MR3121
		0.945	0.472	11/16	0.63	0.504	3/8" MNPT	3/16	RPD MR3122
		0.945	0.315	1/2	0.669	0.504	1/8" MNPT	1/4	RPD MR4120
		0.925	0.433	9/16	0.669	0.504	1/4" MNPT	1/4	RPD MR4121
		0.965	0.472	11/16	0.669	0.504	3/8" MNPT	1/4	RPD MR4122
		1.063	0.315	9/16	0.709	0.543	1/8" MNPT	5/16	RPD MR5120
		1.043	0.433	9/16	0.709	0.543	1/4" MNPT	5/16	RPD MR5121
		0.984	0.472	11/16	0.709	0.543	3/8" MNPT	5/16	RPD MR5122
		1.146	0.315	11/16	0.76	0.661	1/8" MNPT	3/8	RPD MR3820
		1.224	0.433	11/16	0.76	0.661	1/4" MNPT	3/8	RPD MR3821
		1.087	0.472	11/16	0.76	0.661	3/8" MNPT	3/8	RPD MR3822
		1.126	0.591	7/8	0.76	0.661	1/2" MNPT	3/8	RPD MR3823
		1.299	0.433	7/8	0.787	0.807	1/4" MNPT	1/2	RPD MR2121
		1.22	0.472	7/8	0.787	0.807	3/8" MNPT	1/2	RPD MR2122
		1.161	0.591	7/8	0.787	0.807	1/2" MNPT	1/2	RPD MR2123

MALE CONNECTOR - METRIC TUBE TO MALE M5 - RPD MG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		0.846	0.472	10	0.689	-	M5	4	RPD MG04M5
		0.945	0.551	12	0.787	-	M5	6	RPD MG06M5

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE CONNECTOR - FRACTIONAL INCH TUBE TO 10-32 UNF - RPD MG

 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
	0.846	0.157	7/16	0.689	0.394	10-32 UNF	1/8	RPD MG1826
	0.846	0.157	7/16	0.689	0.394	10-32 UNF	5/32	RPD MG5326
	0.846	0.157	7/16	0.689	0.504	10-32 UNF	3/16	RPD MG3126
	0.945	0.157	1/2	0.787	0.504	10-32 UNF	1/4	RPD MG4126


STRAIGHT FEMALE CONNECTOR - FRACTIONAL INCH TUBE TO 10-32 UNF - RPD FG

 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
	0.886	0.276	1/2	0.197	0.394	10-32 UNF	1/8	RPD FG1826

CONEX PUSH-TO-CONNECT FITTINGS

STRAIGHT FEMALE CONNECTOR - FRACTIONAL INCH TUBE TO FEMALE NPT - RPD FR

A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	For tube OD (in)	Part Numbers
1.043	0.433	1/2	0.354	0.394	1/8" FNPT	1/8	RPD FR1820
1.043	0.433	1/2	0.354	0.394	1/8" FNPT	5/32	RPD FR5320
1.142	0.551	11/16	0.472	0.394	1/4" FNPT	5/32	RPD FR5321
1.043	0.433	1/2	0.354	0.504	1/8" FNPT	3/16	RPD FR3120
1.142	0.551	11/16	0.472	0.504	1/4" FNPT	3/16	RPD FR3121
1.102	0.433	9/16	0.354	0.504	1/8" FNPT	1/4	RPD FR4120
1.22	0.551	11/16	0.472	0.504	1/4" FNPT	1/4	RPD FR4121
1.181	0.433	11/16	0.354	0.543	1/8" FNPT	5/16	RPD FR5120
1.26	0.551	11/16	0.472	0.543	1/4" FNPT	5/16	RPD FR5121
1.28	0.591	7/8	0.512	0.543	3/8" FNPT	5/16	RPD FR5122
1.283	0.551	7/8	0.472	0.661	1/4" FNPT	3/8	RPD FR3821
1.323	0.591	7/8	0.512	0.661	3/8" FNPT	3/8	RPD FR3822
1.362	0.551	7/8	0.472	0.807	1/4" FNPT	1/2	RPD FR2121
1.461	0.591	7/8	0.512	0.807	3/8" FNPT	1/2	RPD FR2122




Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


STRAIGHT FEMALE CONNECTOR - METRIC TUBE TO FEMALE BSPP - RPD FG




A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP female thread	For tube OD (mm)	Part Numbers
0.945	0.65	14	0.551	-	1/8" FBSP	4	RPD FG0400
1.043	0.787	17	0.748	-	1/4" FBSP	4	RPD FG0401
1.063	0.65	14	0.787	-	1/8" FBSP	6	RPD FG0600
1.024	0.787	17	0.728	-	1/4" FBSP	6	RPD FG0601
1.122	0.866	19	0.807	-	3/8" FBSP	6	RPD FG0602
1.22	1.102	24	0.827	-	1/2" FBSP	6	RPD FG0603
1.102	0.787	17	0.827	-	1/8" FBSP	8	RPD FG0800
1.102	0.787	17	0.807	-	1/4" FBSP	8	RPD FG0801
1.122	0.866	19	0.807	-	3/8" FBSP	8	RPD FG0802
1.22	1.102	24	0.827	-	1/2" FBSP	8	RPD FG0803
1.161	0.866	19	0.886	-	1/8" FBSP	10	RPD FG1000
1.161	0.866	19	0.866	-	1/4" FBSP	10	RPD FG1001
1.26	0.965	21	0.945	-	3/8" FBSP	10	RPD FG1002
1.26	1.102	24	0.866	-	1/2" FBSP	10	RPD FG1003
1.24	0.965	21	0.945	-	1/4" FBSP	12	RPD FG1201
1.299	0.965	21	0.984	-	3/8" FBSP	12	RPD FG1202
1.299	1.102	24	0.906	-	1/2" FBSP	12	RPD FG1203
1.232	1.102	24	0.917	-	3/8" FBSP	14	RPD FG1402
1.26	1.102	24	0.866	-	1/2" FBSP	14	RPD FG1403
1.339	1.102	24	1.024	-	3/8" FBSP	16	RPD FG1602
1.378	1.102	24	0.984	-	1/2" FBSP	16	RPD FG1603

CONEX PUSH-TO-CONNECT FITTINGS

STRAIGHT FEMALE CONNECTOR - METRIC TUBE TO M5 - RPD FG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric female threading	For tube OD (mm)	Part Numbers
		0.866	0.551	12	0.669	-	M5	4	RPD FG04M5
		0.925	0.65	14	0.728	-	M5	6	RPD FG06M5

FEMALE BULKHEAD CONNECTOR - FRACTIONAL INCH TUBE TO FEMALE NPT - RPD TR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	For tube OD (in)	Part Numbers
		1.063	0.433	9/16	0.63	0.394	1/8" FNPT	5/32	RPD TR5320
		1.063	0.433	9/16	0.669	0.504	1/8" FNPT	3/16	RPD TR3120
		1.142	0.551	11/16	0.669	0.504	1/4" FNPT	3/16	RPD TR3121
		1.083	0.433	11/16	0.669	0.504	1/8" FNPT	1/4	RPD TR4120
		1.201	0.551	11/16	0.669	0.504	1/4" FNPT	1/4	RPD TR4121
		1.122	0.433	11/16	0.709	0.543	1/8" FNPT	5/16	RPD TR5120
		1.24	0.551	11/16	0.709	0.543	1/4" FNPT	5/16	RPD TR5121
		1.378	0.591	7/8	0.709	0.543	3/8" FNPT	5/16	RPD TR5122
		1.358	0.551	7/8	0.76	0.661	1/4" FNPT	3/8	RPD TR3821
		1.398	0.591	7/8	0.76	0.661	3/8" FNPT	3/8	RPD TR3822
		1.457	0.591	7/8	0.827	0.807	3/8" FNPT	1/2	RPD TR2122
		1.535	0.709	1	0.827	0.807	1/2" FNPT	1/2	RPD TR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

FEMALE BULKHEAD CONNECTOR - METRIC TUBE TO FEMALE M5 - RPD TG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric female threading	For tube OD (mm)	Part Numbers
		0.866	0.65	14	0.591	0.394	M5	4	RPD TG04M5
		0.906	0.65	14	0.63	0.504	M5	6	RPD TG06M5

FEMALE BULKHEAD CONNECTOR - METRIC TUBE TO FEMALE BSPP - RPD TG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP female thread	For tube OD (mm)	Part Numbers
		0.965	0.65	14	0.61	0.394	1/8" FBSP	4	RPD TG0400
		1.024	0.787	17	0.669	0.394	1/4" FBSP	4	RPD TG0401
		1.063	0.787	17	0.728	0.504	1/8" FBSP	6	RPD TG0600
		1.102	0.787	17	0.728	0.504	1/4" FBSP	6	RPD TG0601
		1.161	0.866	19	0.768	0.504	3/8" FBSP	6	RPD TG0602
		1.22	1.102	24	0.748	0.504	1/2" FBSP	6	RPD TG0603
		1.043	0.787	17	0.689	0.543	1/8" FBSP	8	RPD TG0800
		1.102	0.787	17	0.728	0.543	1/4" FBSP	8	RPD TG0801
		1.142	0.866	19	0.748	0.543	3/8" FBSP	8	RPD TG0802
		1.24	1.102	24	0.768	0.543	1/2" FBSP	8	RPD TG0803
		1.161	0.965	21	0.827	0.661	1/8" FBSP	10	RPD TG1000
		1.161	0.965	21	0.787	0.661	1/4" FBSP	10	RPD TG1001
		1.24	0.965	21	0.846	0.661	3/8" FBSP	10	RPD TG1002
		1.24	1.102	24	0.768	0.661	1/2" FBSP	10	RPD TG1003
		1.26	1.102	24	0.886	0.78	1/4" FBSP	12	RPD TG1201
		1.299	1.102	24	0.906	0.78	3/8" FBSP	12	RPD TG1202
		1.299	1.102	24	0.827	0.78	1/2" FBSP	12	RPD TG1203
		1.28	1.102	24	0.886	0.894	3/8" FBSP	14	RPD TG1402
		1.358	1.102	24	0.886	0.894	1/2" FBSP	14	RPD TG1403
		1.272	1.102	24	0.878	0.937	3/8" FBSP	16	RPD TG1602
		1.35	1.102	24	0.878	0.937	1/2" FBSP	16	RPD TG1603

CONEX PUSH-TO-CONNECT FITTINGS

MALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RPC MG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.984	0.157	7/16	0.689	0.394	10-32 UNF	1/8	RPC MG1826
		0.984	0.157	7/16	0.689	0.394	10-32 UNF	5/32	RPC MG5326
		1.083	0.157	7/16	0.807	0.504	10-32 UNF	3/16	RPC MG3126
		1.083	0.157	1/2	0.807	0.504	10-32 UNF	1/4	RPC MG4126

MALE ELBOW - FRACTIONAL INCH TUBE TO MALE NPT - RPC MR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		1.004	0.315	7/16	0.689	0.394	1/8" MNPT	1/8	RPC MR1820
		1.004	0.315	7/16	0.689	0.394	1/8" MNPT	5/32	RPC MR5320
		1.122	0.433	9/16	0.689	0.394	1/4" MNPT	5/32	RPC MR5321
		1.122	0.315	7/16	0.807	0.504	1/8" MNPT	3/16	RPC MR3120
		1.22	0.433	9/16	0.807	0.504	1/4" MNPT	3/16	RPC MR3121
		1.28	0.472	11/16	0.807	0.504	3/8" MNPT	3/16	RPC MR3122
		1.122	0.315	1/2	0.807	0.504	1/8" MNPT	1/4	RPC MR4120
		1.22	0.433	9/16	0.807	0.504	1/4" MNPT	1/4	RPC MR4121
		1.28	0.472	11/16	0.807	0.504	3/8" MNPT	1/4	RPC MR4122
		1.181	0.315	9/16	0.886	0.543	1/8" MNPT	5/16	RPC MR5120
		1.299	0.433	9/16	0.886	0.543	1/4" MNPT	5/16	RPC MR5121
		1.358	0.472	11/16	0.886	0.543	3/8" MNPT	5/16	RPC MR5122
		1.327	0.315	11/16	1.035	0.661	1/8" MNPT	3/8	RPC MR3820
		1.445	0.433	11/16	1.035	0.661	1/4" MNPT	3/8	RPC MR3821
		1.484	0.472	11/16	1.035	0.661	3/8" MNPT	3/8	RPC MR3822
		1.642	0.591	7/8	1.035	0.661	1/2" MNPT	3/8	RPC MR3823
		1.543	0.433	7/8	1.118	0.807	1/4" MNPT	1/2	RPC MR2121
		1.583	0.472	7/8	1.118	0.807	3/8" MNPT	1/2	RPC MR2122
		1.72	0.591	7/8	1.118	0.807	1/2" MNPT	1/2	RPC MR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE ELBOW - METRIC TUBE TO MALE BSPT - RPC MR

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
 		0.984	0.689	10	0.689	0.394	1/8" MBSP	4	RPC MR0400
		1.043	0.689	14	0.689	0.394	1/4" MBSP	4	RPC MR0401
		1.083	0.807	12	0.787	0.504	1/8" MBSP	6	RPC MR0600
		1.142	0.807	14	0.787	0.504	1/4" MBSP	6	RPC MR0601
		1.24	0.807	17	0.807	0.504	3/8" MBSP	6	RPC MR0602
		1.339	0.807	21	0.827	0.504	1/2" MBSP	6	RPC MR0603
		1.161	0.886	14	0.866	0.543	1/8" MBSP	8	RPC MR0800
		1.22	0.886	14	0.866	0.543	1/4" MBSP	8	RPC MR0801
		1.319	0.886	17	0.886	0.543	3/8" MBSP	8	RPC MR0802
		1.417	0.886	21	0.906	0.543	1/2" MBSP	8	RPC MR0803
		1.307	1.035	17	1.012	0.661	1/8" MBSP	10	RPC MR1000
		1.366	1.035	17	1.012	0.661	1/4" MBSP	10	RPC MR1001
		1.445	1.035	17	1.012	0.661	3/8" MBSP	10	RPC MR1002
		1.543	1.035	21	1.031	0.661	1/2" MBSP	10	RPC MR1003
		1.496	1.094	19	1.063	0.78	3/8" MBSP	12	RPC MR1202
		1.575	1.094	21	1.063	0.78	1/2" MBSP	12	RPC MR1203
		1.575	1.173	22	1.142	0.894	3/8" MBSP	14	RPC MR1402
		1.654	1.173	22	1.142	0.894	1/2" MBSP	14	RPC MR1403
		1.634	1.213	24	1.201	0.937	3/8" MBSP	16	RPC MR1602
		1.713	1.213	24	1.201	0.937	1/2" MBSP	16	RPC MR1603


MALE ELBOW - METRIC TUBE TO M5 - RPC MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
 		0.984	0.689	10	0.827	0.394	M5	4	RPC MG04M5
		1.083	0.807	12	0.925	0.504	M5	6	RPC MG06M5

CONEX PUSH-TO-CONNECT FITTINGS


EXTENDED MALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RPC LG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		1.398	0.157	7/16	0.689	0.394	10-32 UNF	1/8	RPC LG1826
		1.398	0.157	7/16	0.689	0.394	10-32 UNF	5/32	RPC LG5326

EXTENDED MALE ELBOW - FRACTIONAL INCH TUBE TO MALE NPT - RPC LR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		1.417	0.315	7/16	0.689	0.394	1/8" MNPT	1/8	RPC LR1820
		1.417	0.315	7/16	0.689	0.394	1/8" MNPT	5/32	RPC LR5320
		1.634	0.315	1/2	0.807	0.504	1/8" MNPT	3/16	RPC LR3120
		1.791	0.433	9/16	0.807	0.504	1/4" MNPT	3/16	RPC LR3121
		1.85	0.472	11/16	0.807	0.504	3/8" MNPT	3/16	RPC LR3122
		1.634	0.315	1/2	0.807	0.504	1/8" MNPT	1/4	RPC LR4120
		1.791	0.433	9/16	0.807	0.504	1/4" MNPT	1/4	RPC LR4121
		1.85	0.472	11/16	0.807	0.504	3/8" MNPT	1/4	RPC LR4122
		1.74	0.315	9/16	0.886	0.543	1/8" MNPT	5/16	RPC LR5120
		1.858	0.433	9/16	0.886	0.543	1/4" MNPT	5/16	RPC LR5121
		1.917	0.472	11/16	0.886	0.543	3/8" MNPT	5/16	RPC LR5122
		2.154	0.433	11/16	1.035	0.661	1/4" MNPT	3/8	RPC LR3821
		2.193	0.472	11/16	1.035	0.661	3/8" MNPT	3/8	RPC LR3822
		2.35	0.591	7/8	1.035	0.661	1/2" MNPT	3/8	RPC LR3823
		2.35	0.433	7/8	1.118	0.807	1/4" MNPT	1/2	RPC LR2121
		2.39	0.472	7/8	1.118	0.807	3/8" MNPT	1/2	RPC LR2122
		2.528	0.591	7/8	1.118	0.807	1/2" MNPT	1/2	RPC LR2123





Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

EXTENDED MALE ELBOW - METRIC TUBE TO MALE BSPT - RPC LR

 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
	1.398	0.689	10	1.102	0.394	1/8" MBSP	4	RPC LR0400
	1.457	0.689	14	1.102	0.394	1/4" MBSP	4	RPC LR0401
	1.594	0.807	12	1.299	0.504	1/8" MBSP	6	RPC LR0600
	1.713	0.807	14	1.358	0.504	1/4" MBSP	6	RPC LR0601
	1.811	0.807	17	1.378	0.504	3/8" MBSP	6	RPC LR0602
	1.909	0.807	21	1.398	0.504	1/2" MBSP	6	RPC LR0603
	1.732	0.886	14	1.437	0.543	1/8" MBSP	8	RPC LR0800
	1.791	0.886	14	1.437	0.543	1/4" MBSP	8	RPC LR0801
	1.89	0.886	17	1.457	0.543	3/8" MBSP	8	RPC LR0802
	1.988	0.886	21	1.476	0.543	1/2" MBSP	8	RPC LR0803
	2.016	1.035	17	1.72	0.661	1/8" MBSP	10	RPC LR1000
	2.075	1.035	17	1.72	0.661	1/4" MBSP	10	RPC LR1001
	2.154	1.035	17	1.72	0.661	3/8" MBSP	10	RPC LR1002
	2.252	1.035	21	1.74	0.661	1/2" MBSP	10	RPC LR1003
	2.185	1.094	19	1.831	0.78	1/4" MBSP	12	RPC LR1201
	2.283	1.094	19	1.85	0.78	3/8" MBSP	12	RPC LR1202
	2.362	1.094	21	1.85	0.78	1/2" MBSP	12	RPC LR1203
	2.382	1.173	22	1.949	0.894	3/8" MBSP	14	RPC LR1402
	2.461	1.173	22	1.949	0.894	1/2" MBSP	14	RPC LR1403
	2.441	1.213	24	2.008	0.937	3/8" MBSP	16	RPC LR1602
	2.52	1.213	24	2.008	0.937	1/2" MBSP	16	RPC LR1603


EXTENDED MALE ELBOW - METRIC TUBE TO M5 - RPC LG

 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
	1.398	0.689	10	1.24	0.394	M5	4	RPC LG04M5
	1.594	0.807	12	1.437	0.504	M5	6	RPC LG06M5

CONEX PUSH-TO-CONNECT FITTINGS


FEMALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RPC FG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.965	0.276	1/2	0.689	0.394	10-32 UNF	1/8	RPC FG1826

FEMALE ELBOW - FRACTIONAL INCH TUBE TO NPT - RPC FR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	For tube OD (in)	Part Numbers
		0.965	0.433	1/2	0.689	0.394	1/8" FNPT	5/32	RPC FR5320
		1.063	0.433	1/2	0.807	0.504	1/8" FNPT	3/16	RPC FR3120
		1.181	0.551	11/16	0.807	0.504	1/4" FNPT	3/16	RPC FR3121
		1.063	0.433	1/2	0.807	0.504	1/8" FNPT	1/4	RPC FR4120
		1.181	0.551	11/16	0.807	0.504	1/4" FNPT	1/4	RPC FR4121
		1.13	0.433	9/16	0.886	0.543	1/8" FNPT	5/16	RPC FR5120
		1.169	0.551	11/16	0.886	0.543	1/4" FNPT	5/16	RPC FR5121
		1.287	0.591	7/8	0.886	0.543	3/8" FNPT	5/16	RPC FR5122
		1.307	0.551	11/16	1.035	0.661	1/4" FNPT	3/8	RPC FR3821
		1.346	0.591	7/8	1.035	0.661	3/8" FNPT	3/8	RPC FR3822
		1.504	0.591	7/8	1.118	0.807	3/8" FNPT	1/2	RPC FR2122
		1.622	0.709	1	1.118	0.807	1/2" FNPT	1/2	RPC FR2123





Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

FEMALE ELBOW - METRIC TUBE TO M5 - RPC FG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric female thread	For tube OD (mm)	Part Numbers
		0.807	0.689	12	0.61	0.394	M5	4	RPC FG04M5
		0.906	0.807	12	0.709	0.504	M5	6	RPC FG06M5

FEMALE ELBOW - METRIC TUBE TO FEMALE BSPP - RPC FG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP female thread	For tube OD (mm)	Part Numbers
		0.886	0.689	12	0.61	0.394	1/8" FBSP	4	RPC FG0400
		0.906	0.689	17	0.61	0.394	1/4" FBSP	4	RPC FG0401
		0.984	0.807	12	0.709	0.504	1/8" FBSP	6	RPC FG0600
		1.004	0.807	17	0.709	0.504	1/4" FBSP	6	RPC FG0601
		1.024	0.807	19	0.709	0.504	3/8" FBSP	6	RPC FG0602
		1.102	0.807	24	0.709	0.504	1/2" FBSP	6	RPC FG0603
		1.051	0.886	14	0.776	0.543	1/8" FBSP	8	RPC FG0800
		1.071	0.886	17	0.776	0.543	1/4" FBSP	8	RPC FG0801
		1.091	0.886	19	0.776	0.543	3/8" FBSP	8	RPC FG0802
		1.169	0.886	24	0.776	0.543	1/2" FBSP	8	RPC FG0803
		1.189	1.035	19	0.913	0.661	1/8" FBSP	10	RPC FG1000
		1.209	1.035	19	0.913	0.661	1/4" FBSP	10	RPC FG1001
		1.228	1.035	19	0.913	0.661	3/8" FBSP	10	RPC FG1002
		1.307	1.035	24	0.913	0.661	1/2" FBSP	10	RPC FG1003
		1.24	1.094	19	0.945	0.78	1/4" FBSP	12	RPC FG1201
		1.26	1.094	21	0.945	0.78	3/8" FBSP	12	RPC FG1202
		1.339	1.094	24	0.945	0.78	1/2" FBSP	12	RPC FG1203
		1.319	1.173	22	1.004	0.894	3/8" FBSP	14	RPC FG1402
		1.398	1.173	24	1.004	0.894	1/2" FBSP	14	RPC FG1403
		1.378	1.213	24	1.063	0.937	3/8" FBSP	16	RPC FG1602
		1.457	1.213	24	1.063	0.937	1/2" FBSP	16	RPC FG1603

CONEX PUSH-TO-CONNECT FITTINGS

45° MALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RPQ MG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.945	0.157	7/16	0.65	0.394	10-32 UNF	1/8	RPQ MG1826
		0.945	0.157	7/16	0.65	0.394	10-32 UNF	5/32	RPQ MG5326
		1.004	0.157	1/2	0.728	0.504	10-32 UNF	3/16	RPQ MG3126
		1.004	0.157	1/2	0.728	0.504	10-32 UNF	1/4	RPQ MG4126

45° MALE ELBOW - FRACTIONAL INCH TUBE TO MALE NPT - RPQ MR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.965	0.315	7/16	0.65	0.394	1/8" MNPT	1/8	RPQ MR1820
		0.965	0.315	7/16	0.65	0.394	1/8" MNPT	5/32	RPQ MR5320
		1.083	0.433	9/16	0.65	0.394	1/4" MNPT	5/32	RPQ MR5321
		1.043	0.315	1/2	0.728	0.504	1/8" MNPT	3/16	RPQ MR3120
		1.142	0.433	9/16	0.728	0.504	1/4" MNPT	3/16	RPQ MR3121
		1.201	0.472	11/16	0.728	0.504	3/8" MNPT	3/16	RPQ MR3122
		1.043	0.315	1/2	0.728	0.504	1/8" MNPT	1/4	RPQ MR4120
		1.142	0.433	9/16	0.728	0.504	1/4" MNPT	1/4	RPQ MR4121
		1.201	0.472	11/16	0.728	0.504	3/8" MNPT	1/4	RPQ MR4122
		1.071	0.315	9/16	0.787	0.543	1/8" MNPT	5/16	RPQ MR5120
		1.189	0.433	9/16	0.787	0.543	1/4" MNPT	5/16	RPQ MR5121
		1.248	0.472	11/16	0.787	0.543	3/8" MNPT	5/16	RPQ MR5122
		1.161	0.315	11/16	0.87	0.661	1/8" MNPT	3/8	RPQ MR3820
		1.28	0.433	11/16	0.87	0.661	1/4" MNPT	3/8	RPQ MR3821
		1.319	0.472	11/16	0.87	0.661	3/8" MNPT	3/8	RPQ MR3822
		1.476	0.591	7/8	0.87	0.661	1/2" MNPT	3/8	RPQ MR3823
		1.339	0.433	7/8	0.976	0.807	1/4" MNPT	1/2	RPQ MR2121
		1.378	0.472	7/8	0.976	0.807	3/8" MNPT	1/2	RPQ MR2122
		1.543	0.591	7/8	0.976	0.807	1/2" MNPT	1/2	RPQ MR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

45° MALE ELBOW - METRIC TUBE TO MALE BSPT - RPQ MR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
 		1.551	0.571	10	1.256	0.394	1/8" MBSP	4	RPQ MR0400
		1.61	0.571	14	1.256	0.394	1/4" MBSP	4	RPQ MR0401
		1.693	0.65	12	1.398	0.504	1/8" MBSP	5	RPQ MR0500
		1.752	0.65	14	1.398	0.504	1/4" MBSP	5	RPQ MR0501
		1.85	0.65	17	1.417	0.504	3/8" MBSP	5	RPQ MR0502
		1.949	0.65	21	1.437	0.504	1/2" MBSP	5	RPQ MR0503
		1.693	0.65	12	1.398	0.504	1/8" MBSP	6	RPQ MR0600
		1.752	0.65	14	1.398	0.504	1/4" MBSP	6	RPQ MR0601
		1.85	0.65	17	1.417	0.504	3/8" MBSP	6	RPQ MR0602
		1.949	0.65	21	1.437	0.504	1/2" MBSP	6	RPQ MR0603
		1.811	0.748	14	1.516	0.543	1/8" MBSP	8	RPQ MR0800
		1.87	0.748	14	1.516	0.543	1/4" MBSP	8	RPQ MR0801
		1.969	0.748	17	1.535	0.543	3/8" MBSP	8	RPQ MR0802
		2.067	0.748	21	1.555	0.543	1/2" MBSP	8	RPQ MR0803
		2.02	0.866	17	1.724	0.661	1/8" MBSP	10	RPQ MR1000
		2.079	0.866	17	1.724	0.661	1/4" MBSP	10	RPQ MR1001
		2.157	0.866	17	1.724	0.661	3/8" MBSP	10	RPQ MR1002
		2.256	0.866	21	1.744	0.661	1/2" MBSP	10	RPQ MR1003
		2.185	0.906	19	1.831	0.78	1/4" MBSP	12	RPQ MR1201
		2.283	0.906	19	1.85	0.78	3/8" MBSP	12	RPQ MR1202
		2.362	0.906	21	1.85	0.78	1/2" MBSP	12	RPQ MR1203

135° MALE ELBOW - METRIC TUBE TO MALE M5 - RPQ MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
 		1.535	0.571	10	1.378	0.394	M5	4	RPQ MG04M5
		1.673	0.65	12	1.516	0.504	M5	6	RPQ MG06M5


CONEX PUSH-TO-CONNECT FITTINGS

MALE BANJO - FRACTIONAL INCH TUBE TO 10-32 UNF - RPB MG



A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
0.362	0.157	5/16	0.776	0.394	10-32 UNF	1/8	RPB MG1826
0.362	0.157	5/16	0.776	0.394	10-32 UNF	5/32	RPB MG5326
0.362	0.157	5/16	0.886	0.504	10-32 UNF	3/16	RPB MG3126

MALE BANJO - FRACTIONAL INCH TUBE TO MALE NPT - RPB MR




A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
0.472	0.315	1/2	0.858	0.394	1/8" MNPT	1/8	RPB MR1820
0.472	0.315	1/2	0.858	0.394	1/8" MNPT	5/32	RPB MR5320
0.472	0.315	1/2	0.906	0.504	1/8" MNPT	3/16	RPB MR3120
0.472	0.433	9/16	1.004	0.504	1/4" MNPT	3/16	RPB MR3121
0.472	0.315	1/2	0.906	0.504	1/8" MNPT	1/4	RPB MR4120
0.472	0.433	9/16	1.004	0.504	1/4" MNPT	1/4	RPB MR4121
0.472	0.315	1/2	0.969	0.543	1/8" MNPT	5/16	RPB MR5120
0.472	0.433	9/16	1.055	0.543	1/4" MNPT	5/16	RPB MR5121
0.606	0.472	3/4	1.134	0.543	3/8" MNPT	5/16	RPB MR5122
0.472	0.433	9/16	1.22	0.661	1/4" MNPT	3/8	RPB MR3821
0.606	0.472	3/4	1.22	0.661	3/8" MNPT	3/8	RPB MR3822
0.606	0.472	3/4	1.307	0.807	3/8" MNPT	1/2	RPB MR2122
0.689	0.591	1	1.386	0.807	1/2" MNPT	1/2	RPB MR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE BANJO - METRIC TUBE TO MALE BSPT - RPB MR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
 		0.984	0.858	10	0.689	0.394	1/8" MBSP	4	RPB MR0400
		1.142	0.945	14	0.787	0.394	1/4" MBSP	4	RPB MR0401
		0.984	0.906	10	0.689	0.504	1/8" MBSP	6	RPB MR0600
		1.142	1.004	14	0.787	0.504	1/4" MBSP	6	RPB MR0601
		1.378	1.067	19	0.945	0.504	3/8" MBSP	6	RPB MR0602
		1.575	1.185	24	1.063	0.504	1/2" MBSP	6	RPB MR0603
		0.984	0.969	10	0.689	0.543	1/8" MBSP	8	RPB MR0800
		1.142	1.055	14	0.787	0.543	1/4" MBSP	8	RPB MR0801
		1.378	1.134	19	0.945	0.543	3/8" MBSP	8	RPB MR0802
		1.575	1.201	24	1.063	0.543	1/2" MBSP	8	RPB MR0803
		0.984	1.122	10	0.689	0.661	1/8" MBSP	10	RPB MR1000
		1.142	1.22	14	0.787	0.661	1/4" MBSP	10	RPB MR1001
		1.378	1.22	19	0.945	0.661	3/8" MBSP	10	RPB MR1002
		1.575	1.339	24	1.063	0.661	1/2" MBSP	10	RPB MR1003
		1.142	1.252	14	0.787	0.78	1/4" MBSP	12	RPB MR1201
		1.378	1.339	19	0.945	0.78	3/8" MBSP	12	RPB MR1202
		1.575	1.409	24	1.063	0.78	1/2" MBSP	12	RPB MR1203
		1.378	1.37	19	0.945	0.937	3/8" MBSP	16	RPB MR1602
		1.575	1.441	24	1.063	0.937	1/2" MBSP	16	RPB MR1603

MALE BANJO - METRIC TUBE TO MALE M5 - RPB MG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
 		0.787	0.776	8	0.63	0.394	M5	4	RPB MG04M5
		0.787	0.776	8	0.63	0.504	M5	6	RPB MG06M5

CONEX PUSH-TO-CONNECT FITTINGS

FEMALE BANJO - FRACTIONAL INCH TUBE TO UNF THREAD - RPB FG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.197	0.157	1/2	0.394	0.394	10-32 UNF	1/8	RPB FG1826
		0.197	0.157	1/2	0.394	0.394	10-32 UNF	5/32	RPB FG5326
		0.197	0.157	1/2	0.394	0.504	10-32 UNF	3/16	RPB FG3126

FEMALE BANJO - FRACTIONAL INCH TUBE TO FEMALE NPT - RPB FR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	For tube OD (in)	Part Numbers
		0.354	0.315	1/2	0.571	0.394	1/8" FNPT	1/8	RPB FR1820
		0.354	0.315	1/2	0.571	0.394	1/8" FNPT	5/32	RPB FR5320
		0.354	0.315	1/2	0.571	0.504	1/8" FNPT	3/16	RPB FR3120
		0.472	0.433	11/16	0.717	0.504	1/4" FNPT	3/16	RPB FR3121
		0.354	0.315	9/16	0.571	0.504	1/8" FNPT	1/4	RPB FR4120
		0.472	0.433	11/16	0.717	0.504	1/4" FNPT	1/4	RPB FR4121
		0.354	0.315	11/16	0.571	0.543	1/8" FNPT	5/16	RPB FR5120
		0.472	0.433	11/16	0.717	0.543	1/4" FNPT	5/16	RPB FR5121
		0.512	0.472	7/8	0.866	0.543	3/8" FNPT	5/16	RPB FR5122
		0.472	0.433	7/8	0.717	0.661	1/4" FNPT	3/8	RPB FR3821
		0.512	0.472	7/8	0.866	0.661	3/8" FNPT	3/8	RPB FR3822
		0.512	0.472	7/8	0.866	0.807	3/8" FNPT	1/2	RPB FR2122
		0.63	0.591	1	1.079	0.807	1/2" FNPT	1/2	RPB FR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

FEMALE BANJO - METRIC TUBE TO M5 - RPB FG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric female thread	For tube OD (mm)	Part Numbers
		0.787	0.776	8	0.63	0.394	M5	4	RPB FG04M5
		0.787	0.878	8	0.63	0.504	M5	6	RPB FG06M5

FEMALE BANJO - METRIC TUBE TO FEMALE BSPP - RPB FG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP female thread	For tube OD (mm)	Part Numbers
		1.181	0.925	12	0.965	0.394	1/8" FBSP	4	RPB FG0400
		1.26	0.945	17	1.024	0.394	1/4" FBSP	4	RPB FG0401
		1.181	0.906	12	0.965	0.504	1/8" FBSP	6	RPB FG0600
		1.26	0.984	17	1.024	0.504	1/4" FBSP	6	RPB FG0601
		1.535	1.043	19	1.28	0.504	3/8" FBSP	6	RPB FG0602
		1.654	1.173	24	1.339	0.504	1/2" FBSP	6	RPB FG0603
		1.181	0.984	12	0.965	0.543	1/8" FBSP	8	RPB FG0800
		1.26	1.063	17	1.024	0.543	1/4" FBSP	8	RPB FG0801
		1.535	1.142	19	1.28	0.543	3/8" FBSP	8	RPB FG0802
		1.654	1.193	24	1.339	0.543	1/2" FBSP	8	RPB FG0803
		1.181	1.142	12	0.965	0.661	1/8" FBSP	10	RPB FG1000
		1.26	1.299	17	1.024	0.661	1/4" FBSP	10	RPB FG1001
		1.535	1.26	19	1.28	0.661	3/8" FBSP	10	RPB FG1002
		1.654	1.339	24	1.339	0.661	1/2" FBSP	10	RPB FG1003
		1.26	1.22	17	1.024	0.78	1/4" FBSP	12	RPB FG1201
		1.535	1.339	19	1.28	0.78	3/8" FBSP	12	RPB FG1202
		1.654	1.417	24	1.339	0.78	1/2" FBSP	12	RPB FG1203
		1.535	1.339	19	1.28	0.937	3/8" FBSP	16	RPB FG1602
		1.654	1.429	24	1.339	0.937	1/2" FBSP	16	RPB FG1603

CONEX PUSH-TO-CONNECT FITTINGS

MALE BRANCH TEE - FRACTIONAL INCH TUBE TO 10-32 UNF - RPT CG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.984	0.157	7/16	0.689	0.394	10-32 UNF	1/8	RPT CG1826
		0.984	0.157	7/16	0.689	0.394	10-32 UNF	5/32	RPT CG5326
		1.083	0.157	1/2	0.807	0.504	10-32 UNF	3/16	RPT CG3126
		1.083	0.157	1/2	0.807	0.504	10-32 UNF	1/4	RPT CG4126

MALE BRANCH TEE - FRACTIONAL INCH TUBE TO MALE NPT - RPT CR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		1.004	0.315	7/16	0.689	0.394	1/8" MNPT	1/8	RPT CR1820
		1.004	0.315	7/16	0.689	0.394	1/8" MNPT	5/32	RPT CR5320
		1.122	0.433	9/16	0.689	0.394	1/4" MNPT	5/32	RPT CR5321
		1.122	0.315	1/2	0.807	0.504	1/8" MNPT	3/16	RPT CR3120
		1.22	0.433	9/16	0.807	0.504	1/4" MNPT	3/16	RPT CR3121
		1.28	0.472	11/16	0.807	0.504	3/8" MNPT	3/16	RPT CR3122
		1.122	0.315	1/2	0.807	0.504	1/8" MNPT	1/4	RPT CR4120
		1.22	0.433	9/16	0.807	0.504	1/4" MNPT	1/4	RPT CR4121
		1.28	0.472	11/16	0.807	0.504	3/8" MNPT	1/4	RPT CR4122
		1.181	0.315	9/16	0.886	0.543	1/8" MNPT	5/16	RPT CR5120
		1.299	0.433	9/16	0.886	0.543	1/4" MNPT	5/16	RPT CR5121
		1.358	0.472	11/16	0.886	0.543	3/8" MNPT	5/16	RPT CR5122
		1.327	0.315	11/16	1.035	0.661	1/8" MNPT	3/8	RPT CR3820
		1.445	0.433	11/16	1.035	0.661	1/4" MNPT	3/8	RPT CR3821
		1.484	0.472	11/16	1.035	0.661	3/8" MNPT	3/8	RPT CR3822
		1.642	0.591	7/8	1.035	0.661	1/2" MNPT	3/8	RPT CR3823
		1.543	0.433	7/8	1.118	0.807	1/4" MNPT	1/2	RPT CR2121
		1.583	0.472	7/8	1.118	0.807	3/8" MNPT	1/2	RPT CR2122
		1.72	0.591	7/8	1.118	0.807	1/2" MNPT	1/2	RPT CR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE BRANCH TEE - METRIC TUBE TO MALE BSPT - RPT CR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.378	0.984	10	0.689	0.394	1/8" MBSP	4	RPT CR0400
		1.378	1.043	14	0.689	0.394	1/4" MBSP	4	RPT CR0401
		1.614	1.083	12	0.787	0.504	1/8" MBSP	6	RPT CR0600
		1.614	1.142	14	0.787	0.504	1/4" MBSP	6	RPT CR0601
		1.614	1.24	17	0.807	0.504	3/8" MBSP	6	RPT CR0602
		1.614	1.339	21	0.827	0.504	1/2" MBSP	6	RPT CR0603
		1.772	1.161	14	0.866	0.543	1/8" MBSP	8	RPT CR0800
		1.772	1.22	14	0.866	0.543	1/4" MBSP	8	RPT CR0801
		1.772	1.319	17	0.886	0.543	3/8" MBSP	8	RPT CR0802
		1.772	1.417	21	0.906	0.543	1/2" MBSP	8	RPT CR0803
		2.071	1.307	17	1.012	0.661	1/8" MBSP	10	RPT CR1000
		2.071	1.366	17	1.012	0.661	1/4" MBSP	10	RPT CR1001
		2.071	1.445	17	1.012	0.661	3/8" MBSP	10	RPT CR1002
		2.071	1.543	21	1.031	0.661	1/2" MBSP	10	RPT CR1003
		2.189	1.398	19	1.043	0.78	1/4" MBSP	12	RPT CR1201
		2.189	1.496	19	1.063	0.78	3/8" MBSP	12	RPT CR1202
		2.189	1.575	21	1.063	0.78	1/2" MBSP	12	RPT CR1203
		2.441	1.622	22	1.189	0.894	3/8" MBSP	14	RPT CR1402
		2.441	1.701	22	1.189	0.894	1/2" MBSP	14	RPT CR1403
		2.543	1.693	24	1.26	0.937	3/8" MBSP	16	RPT CR1602
		2.543	1.772	24	1.26	0.937	1/2" MBSP	16	RPT CR1603

MALE BRANCH TEE - METRIC TUBE TO M5 - RPT CG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.378	0.984	10	0.827	0.394	M5	4	RPT CG04M5
		1.614	1.083	12	0.925	0.504	M5	6	RPT CG06M5

CONEX PUSH-TO-CONNECT FITTINGS

MALE RUN TEE - FRACTIONAL INCH TUBE TO 10-32 UNF - RPT AG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		1.673	0.157	7/16	0.689	0.394	10-32 UNF	1/8	RPT AG1826
		1.673	0.157	7/16	0.689	0.394	10-32 UNF	5/32	RPT AG5326
		1.89	0.157	1/2	0.807	0.504	10-32 UNF	3/16	RPT AG3126
		1.89	0.157	1/2	0.807	0.504	10-32 UNF	1/4	RPT AG4126

MALE RUN TEE - FRACTIONAL INCH TUBE TO MALE NPT - RPT AR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		1.693	0.315	7/16	0.689	0.394	1/8" MNPT	1/8	RPT AR1820
		1.693	0.315	7/16	0.689	0.394	1/8" MNPT	5/32	RPT AR5320
		1.811	0.433	9/16	0.689	0.394	1/4" MNPT	5/32	RPT AR5321
		1.929	0.315	1/2	0.807	0.504	1/8" MNPT	3/16	RPT AR3120
		2.028	0.433	9/16	0.807	0.504	1/4" MNPT	3/16	RPT AR3121
		2.087	0.472	11/16	0.807	0.504	3/8" MNPT	3/16	RPT AR3122
		1.929	0.315	1/2	0.807	0.504	1/8" MNPT	1/4	RPT AR4120
		2.028	0.433	9/16	0.807	0.504	1/4" MNPT	1/4	RPT AR4121
		2.087	0.472	11/16	0.807	0.504	3/8" MNPT	1/4	RPT AR4122
		2.067	0.315	9/16	0.886	0.543	1/8" MNPT	5/16	RPT AR5120
		2.185	0.433	9/16	0.886	0.543	1/4" MNPT	5/16	RPT AR5121
		2.244	0.472	11/16	0.886	0.543	3/8" MNPT	5/16	RPT AR5122
		2.362	0.315	11/16	1.035	0.661	1/8" MNPT	3/8	RPT AR3820
		2.48	0.433	11/16	1.035	0.74	1/4" MNPT	3/8	RPT AR3821
		2.52	0.472	11/16	1.035	0.661	3/8" MNPT	3/8	RPT AR3822
		2.677	0.591	7/8	1.035	0.661	1/2" MNPT	3/8	RPT AR3823
		2.661	0.433	7/8	1.118	0.807	1/4" MNPT	1/2	RPT AR2121
		2.701	0.472	7/8	1.118	0.807	3/8" MNPT	1/2	RPT AR2122
		2.839	0.591	7/8	1.118	0.807	1/2" MNPT	1/2	RPT AR2123

Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F


Construction
Polymer and
nickel-plated
brass

MALE RUN TEE - METRIC TUBE TO MALE BSPT - RPT AR



A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
1.673	0.689	10	1.378	0.394	1/8" MBSP	4	RPT AR0400
1.732	0.689	14	1.378	0.394	1/4" MBSP	4	RPT AR0401
1.89	0.807	12	1.594	0.504	1/8" MBSP	6	RPT AR0600
1.949	0.807	14	1.594	0.504	1/4" MBSP	6	RPT AR0601
2.047	0.807	17	1.614	0.504	3/8" MBSP	6	RPT AR0602
2.146	0.807	21	1.634	0.504	1/2" MBSP	6	RPT AR0603
2.047	0.886	14	1.752	0.543	1/8" MBSP	8	RPT AR0800
2.106	0.886	14	1.752	0.543	1/4" MBSP	8	RPT AR0801
2.205	0.886	17	1.772	0.543	3/8" MBSP	8	RPT AR0802
2.303	0.886	21	1.791	0.543	1/2" MBSP	8	RPT AR0803
2.343	1.035	17	2.047	0.661	1/8" MBSP	10	RPT AR1000
2.402	1.035	17	2.047	0.661	1/4" MBSP	10	RPT AR1001
2.48	1.035	17	2.047	0.661	3/8" MBSP	10	RPT AR1002
2.579	1.035	21	2.067	0.661	1/2" MBSP	10	RPT AR1003
2.492	1.094	19	2.138	0.78	1/4" MBSP	12	RPT AR1201
2.591	1.094	19	2.157	0.78	3/8" MBSP	12	RPT AR1202
2.669	1.094	21	2.157	0.78	1/2" MBSP	12	RPT AR1203
2.843	1.22	22	2.409	0.894	3/8" MBSP	14	RPT AR1402
2.921	1.22	22	2.409	0.894	1/2" MBSP	14	RPT AR1403
2.965	1.272	24	2.531	0.937	3/8" MBSP	16	RPT AR1602
3.043	1.272	24	2.531	0.937	1/2" MBSP	16	RPT AR1603


MALE RUN TEE - METRIC TUBE TO TUBE TO MALE M5 - RPT AG




A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
1.673	0.689	10	1.516	0.394	M5	4	RPT AG04M5
1.89	0.807	12	1.732	0.504	M5	6	RPT AG06M5

CONEX PUSH-TO-CONNECT FITTINGS


MALE REDUCER - FRACTIONAL INCH TUBE TO MALE NPT - RPN KR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	For tube OD (in)	Part Numbers
		2.665	0.315	9/16	0.61	1.591	1/8" MNPT	1/4	5/32	RPN KR4153
		2.795	0.433	9/16	0.61	1.591	1/4" MNPT	5/16	5/32	RPN KR5153
		2.811	0.433	11/16	0.614	1.591	1/4" MNPT	5/16	1/4	RPN KR5141
		3.594	0.472	7/8	0.709	1.85	3/8" MNPT	3/8	5/16	RPN KR3851

MALE REDUCER - METRIC TUBE TO MALE BSPT - RPN KR

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	For tube OD (mm)	Part Numbers
		2.646	0.295	14	0.61	1.591	1/8" MBSP	6	4	RPN KR6400
		2.717	0.354	14	0.61	1.591	1/4" MBSP	8	4	RPN KR8401
		2.732	0.354	17	0.614	1.591	1/4" MBSP	8	6	RPN KR8601
		3.555	0.433	21	0.709	1.85	1/8" MBSP	10	8	RPN KR1082
		3.654	0.512	21	0.709	1.85	1/2" MBSP	10	8	RPN KR1083

Y MALE - FRACTIONAL INCH TUBE TO 10-32 UNF - RPY MG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	UNF thread	For tube OD	Part Numbers
		1.634	0.157	7/16	0.413	0.394	10-32 UNF	1/8	RPY MG1826
		1.634	0.157	7/16	0.413	0.394	10-32 UNF	5/32	RPY MG5326
		1.732	0.157	1/2	0.512	0.504	10-32 UNF	3/16	RPY MG3126
		1.732	0.157	1/2	0.512	0.504	10-32 UNF	1/4	RPY MG4126

Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


Y MALE - FRACTIONAL INCH TUBE TO MALE NPT - RPY MR




A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
1.654	0.315	7/16	0.413	0.394	1/8" MNPT	1/8	RPY MR1820
1.654	0.315	7/16	0.413	0.394	1/8" MNPT	5/32	RPY MR5320
1.772	0.433	9/16	0.413	0.394	1/4" MNPT	5/32	RPY MR5321
1.772	0.315	1/2	0.512	0.504	1/8" MNPT	3/16	RPY MR3120
1.87	0.433	9/16	0.512	0.504	1/4" MNPT	3/16	RPY MR3121
1.929	0.472	11/16	0.512	0.504	3/8" MNPT	3/16	RPY MR3122
1.772	0.315	1/2	0.512	0.504	1/8" MNPT	1/4	RPY MR4120
1.87	0.433	9/16	0.512	0.504	1/4" MNPT	1/4	RPY MR4121
1.929	0.472	11/16	0.512	0.504	3/8" MNPT	1/4	RPY MR4122
1.764	0.315	9/16	0.571	0.543	1/8" MNPT	5/16	RPY MR5120
1.882	0.433	9/16	0.571	0.543	1/4" MNPT	5/16	RPY MR5121
1.941	0.472	11/16	0.571	0.543	3/8" MNPT	5/16	RPY MR5122
2.394	0.315	11/16	0.709	0.661	1/8" MNPT	3/8	RPY MR3820
2.374	0.433	11/16	0.709	0.661	1/4" MNPT	3/8	RPY MR3821
2.413	0.472	11/16	0.709	0.661	3/8" MNPT	3/8	RPY MR3822
2.512	0.591	7/8	0.709	0.661	1/2" MNPT	3/8	RPY MR3823
2.469	0.433	7/8	0.827	0.807	1/4" MNPT	1/2	RPY MR2121
2.508	0.472	7/8	0.827	0.807	3/8" MNPT	1/2	RPY MR2122
2.646	0.591	7/8	0.827	0.807	1/2" MNPT	1/2	RPY MR2123

CONEX PUSH-TO-CONNECT FITTINGS

Y MALE - METRIC TUBE TO MALE BSPT - RPY MR

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.634	0.787	10	1.339	-	1/8" MBSP	4	RPY MR0400
		1.693	0.787	14	1.339	-	1/4" MBSP	4	RPY MR0401
		1.732	1.008	12	1.437	-	1/8" MBSP	6	RPY MR0600
		1.791	1.008	14	1.437	-	1/4" MBSP	6	RPY MR0601
		1.89	1.008	17	1.457	-	3/8" MBSP	6	RPY MR0602
		1.988	1.008	21	1.476	-	1/2" MBSP	6	RPY MR0603
		1.744	1.087	14	1.449	-	1/8" MBSP	8	RPY MR0800
		1.803	1.087	14	1.449	-	1/4" MBSP	8	RPY MR0801
		1.902	1.087	17	1.469	-	3/8" MBSP	8	RPY MR0802
		2	1.087	21	1.488	-	1/2" MBSP	8	RPY MR0803
		2.209	1.323	17	1.913	-	1/8" MBSP	10	RPY MR1000
		2.268	1.323	17	1.913	-	1/4" MBSP	10	RPY MR1001
		2.346	1.283	17	1.913	-	3/8" MBSP	10	RPY MR1002
		2.445	1.323	21	1.933	-	1/2" MBSP	10	RPY MR1003
		2.394	1.559	19	2.039	-	1/4" MBSP	12	RPY MR1201
		2.492	1.559	19	2.059	-	3/8" MBSP	12	RPY MR1202
		2.571	1.559	21	2.059	-	1/2" MBSP	12	RPY MR1203
		2.551	1.787	22	2.118	-	3/8" MBSP	14	RPY MR1402
		2.63	1.787	22	2.118	-	1/2" MBSP	14	RPY MR1403
		2.618	1.874	24	2.185	-	3/8" MBSP	16	RPY MR1602
		2.697	1.874	24	2.185	-	1/2" MBSP	16	RPY MR1603

Y MALE - METRIC TUBE TO FEMALE M5 - RPY MG


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.63	0.787	10	1.48	-	M5	4	RPY MG04M5
		1.724	0.976	12	1.575	-	M5	6	RPY MG06M5

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


EQUAL STRAIGHT UNION - METRIC TUBE - RPU ET

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.181	0.394	-	-	-	4	RPU ET0404
		1.445	0.504	-	-	-	6	RPU ET0606
		1.535	0.543	-	-	-	8	RPU ET0808
		1.661	0.661	-	-	-	10	RPU ET1010
		1.744	0.78	-	-	-	12	RPU ET1212
		1.949	0.894	-	-	-	14	RPU ET1414
		1.953	0.937	-	-	-	16	RPU ET1616


EQUAL STRAIGHT UNION - FRACTIONAL INCH TUBE - RPU ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		1.181	0.394	-	-	-	1/8	RPU ET1818
		1.181	0.394	-	-	-	5/32	RPU ET5353
		1.445	0.504	-	-	-	3/16	RPU ET3131
		1.445	0.504	-	-	-	1/4	RPU ET4141
		1.535	0.543	-	-	-	5/16	RPU ET5151
		1.661	0.661	-	-	-	3/8	RPU ET3838
		1.744	0.807	-	-	-	1/2	RPU ET2121

BULKHEAD FITTING - FRACTIONAL INCH TUBE - RPU TT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Drill Ø (mm)	Panel thickness (in)	Part Numbers
		1.339	0.472	0.551	-	0.394	1/8	0.4	0.51	RPU TT1818
		1.339	0.472	0.551	-	0.394	5/32	0.4	0.51	RPU TT5353
		1.417	0.551	0.669	-	0.504	3/16	0.5	0.59	RPU TT3131
		1.417	0.551	0.669	-	0.504	1/4	0.5	0.59	RPU TT4141
		1.555	0.63	0.748	-	0.543	5/16	0.8	0.59	RPU TT5151
		1.598	0.787	0.945	-	0.661	3/8	0.9	0.79	RPU TT3838
		1.594	0.866	1.024	-	0.807	1/2	1.0	0.79	RPU TT2121

BULKHEAD FITTING - METRIC TUCHE - RPU TT


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Panel thickness (in)	Drill Ø (in)	For tube OD (mm)	Part Numbers
		1.339	0.65	14	0.512	0.394	0.51	0.5	4	RPU TT0404
		1.417	0.787	17	0.551	0.504	0.51	0.6	6	RPU TT0606
		1.555	0.866	19	0.622	0.543	0.59	0.7	8	RPU TT0808
		1.598	1.102	24	0.65	0.661	0.59	0.8	10	RPU TT1010
		1.752	1.201	26	0.701	0.78	0.59	0.9	12	RPU TT1212
		2.047	1.28	28	0.72	0.937	0.79	1.0	16	RPU TT1616

CONEX PUSH-TO-CONNECT FITTINGS


UNEQUAL UNION - FRACTIONAL INCH TUBE - RPU IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For tube OD (in)	Part Numbers
		1.181	0.571	0.571	-	-	5/32	1/8	RPU IT5318
		1.303	0.63	0.61	-	-	3/16	5/32	RPU IT3153
		1.303	0.63	0.61	-	-	1/4	5/32	RPU IT4153
		1.445	0.614	0.614	-	-	1/4	3/16	RPU IT4131
		1.508	0.709	0.614	-	-	5/16	1/4	RPU IT5141
		1.618	0.76	0.709	-	-	3/8	5/16	RPU IT3851
		1.783	0.827	0.76	-	-	1/2	3/8	RPU IT2138


STRAIGHT UNION FOR UNEQUAL TUBES - METRIC TUBE - RPU IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	For tube OD (mm)	Part Numbers
		1.303	0.504	0.394	-	-	6	4	RPU IT0604
		1.508	0.543	0.504	-	-	8	6	RPU IT0806
		1.618	0.661	0.543	-	-	10	8	RPU IT1008
		1.783	0.78	0.661	-	-	12	10	RPU IT1210
		1.953	0.937	0.772	-	-	16	12	RPU IT1612

REDUCER - FRACTIONAL INCH TUBE - RPR PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For fitting ID (in)	Part Numbers
		1.457	0.61	-	-	-	5/32	1/4	RPR PT4153
		1.457	0.61	-	-	-	5/32	5/16	RPR PT5153
		1.476	0.63	-	-	-	1/4	5/16	RPR PT5141
		1.614	0.63	-	-	-	1/4	3/8	RPR PT3841
		1.752	0.768	-	-	-	5/16	3/8	RPR PT3851
		1.457	0.63	-	-	-	1/4	1/2	RPR PT2141
		1.693	0.728	-	-	-	5/16	1/2	RPR PT2151
		1.646	0.654	-	-	-	3/8	1/2	RPR PT2138

REDUCER - METRIC TUBE - RPR PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Fitting ID (mm)	Part Numbers
		1.457	0.394	-	0.61	-	4	6	RPR PT0604
		1.457	0.394	-	0.61	-	4	8	RPR PT0804
		1.476	0.504	-	0.63	-	6	8	RPR PT0806
		1.614	0.504	-	0.63	-	6	10	RPR PT1006
		1.732	0.543	-	0.748	-	8	10	RPR PT1008
		1.693	0.543	-	0.709	-	8	12	RPR PT1208
		1.673	0.661	-	0.689	-	10	12	RPR PT1210

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


90° EQUAL ELBOW - FRACTIONAL INCH TUBE - RPC ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.689	0.61	-	-	0.394	1/8	RPC ET1818
		0.689	0.61	-	-	0.394	5/32	RPC ET5353
		0.807	0.614	-	-	0.504	3/16	RPC ET3131
		0.807	0.614	-	-	0.504	1/4	RPC ET4141
		0.898	0.709	-	-	0.543	5/16	RPC ET5151
		1.035	0.76	-	-	0.661	3/8	RPC ET3838
		1.118	0.843	-	-	0.807	1/2	RPC ET2121


90° EQUAL ELBOW - METRIC TUBE - RPC ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		0.689	0.394	-	-	-	4	RPC ET0404
		0.807	0.504	-	-	-	6	RPC ET0606
		0.886	0.543	-	-	-	8	RPC ET0808
		0.898	0.543	-	-	-	10	RPC ET1010
		1.063	0.661	-	-	-	12	RPC ET1212
		1.173	0.78	-	-	-	14	RPC ET1414
		1.213	0.937	-	-	-	16	RPC ET1616

90° PLUG-IN ELBOW - FRACTIONAL INCH TUBE - RPC PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For fitting ID (in)	Part Numbers
		1.22	0.689	-	-	-	1/8	1/8	RPC PT1818
		1.22	0.689	-	-	-	5/32	5/32	RPC PT5353
		1.516	0.807	-	-	-	3/16	3/16	RPC PT3131
		1.516	0.807	-	-	-	1/4	1/4	RPC PT4141
		1.594	0.886	-	-	-	5/16	5/16	RPC PT5151
		1.831	1.035	-	-	-	3/8	3/8	RPC PT3838
		1.913	1.118	-	-	-	1/2	1/2	RPC PT2121

90° ELBOW - METRIC TUBE - RPC PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Fitting ID (mm)	Part Numbers
		1.22	0.689	-	-	-	4	4	RPC PT0404
		1.516	0.807	-	-	-	6	6	RPC PT0606
		1.594	0.886	-	-	-	8	8	RPC PT0808
		1.831	1.035	-	-	-	10	10	RPC PT1010
		1.89	1.094	-	-	-	12	12	RPC PT1212
		2.039	1.173	-	-	-	14	14	RPC PT1414
		2.126	1.213	-	-	-	16	16	RPC PT1616

CONEX PUSH-TO-CONNECT FITTINGS


45° PLUG-IN ELBOW - FRACTIONAL INCH TUBE - RPQ PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For fitting ID (in)	Part Numbers
		1.787	0.65	-	-	0.413	1/8	1/8	RPQ PT1818
		1.787	0.65	-	-	0.413	5/32	5/32	RPQ PT5353
		2.126	0.728	-	-	0.512	3/16	3/16	RPQ PT3131
		2.126	0.728	-	-	0.512	1/4	1/4	RPQ PT4141
		2.244	0.787	-	-	0.571	5/16	5/16	RPQ PT5151
		2.571	0.87	-	-	0.709	3/8	3/8	RPQ PT3838
		2.677	0.937	-	-	0.787	1/2	1/2	RPQ PT2121

45° PLUG-IN ELBOW - METRIC TUBE - RPQ PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Fitting ID (mm)	Part Numbers
		1.787	0.579	-	1.079	0.413	4	4	RPQ PT0404
		2.126	0.65	-	1.26	0.512	6	6	RPQ PT0606
		2.244	0.728	-	1.378	0.571	8	8	RPQ PT0808
		2.571	0.827	-	1.575	0.709	10	10	RPQ PT1010
		2.677	0.945	-	1.693	0.787	12	12	RPQ PT1212

EQUAL Y - FRACTIONAL INCH TUBE - RPY ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		1.339	0.413	-	-	0.394	1/8	RPY ET1818
		1.339	0.413	-	-	0.394	5/32	RPY ET5353
		1.457	0.512	-	-	0.504	3/16	RPY ET3131
		1.457	0.512	-	-	0.504	1/4	RPY ET4141
		1.48	0.571	-	-	0.543	5/16	RPY ET5151
		1.992	0.709	-	-	0.661	3/8	RPY ET3838
		2.047	0.827	-	-	0.807	1/2	RPY ET2121

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


EQUAL Y - METRIC TUBE - RPY ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.339	0.787	-	0.413	0.394	4	RPY ET0404
		1.457	1.008	-	0.512	0.504	6	RPY ET0606
		1.48	1.087	-	0.571	0.543	8	RPY ET0808
		1.992	1.323	-	0.709	0.661	10	RPY ET1010
		2.091	1.559	-	0.787	0.78	12	RPY ET1212
		2.15	1.787	-	0.917	0.894	14	RPY ET1414
		2.228	1.929	-	0.965	0.965	16	RPY ET1616


UNEQUAL Y - FRACTIONAL INCH TUBE - RPY IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For tube OD (in)	Part Numbers
		1.339	0.413	-	-	-	5/32	1/8	RPY IT5318
		1.398	0.413	-	-	-	1/4	5/32	RPY IT4153
		1.457	0.512	-	-	-	1/4	3/16	RPY IT4131
		1.398	0.413	-	-	-	3/16	5/32	RPY IT3153
		1.654	0.512	-	-	-	5/16	1/4	RPY IT5141
		1.929	0.571	-	-	-	3/8	5/16	RPY IT3851
		2.059	0.709	-	-	-	1/2	3/8	RPY IT2138

UNEQUAL Y - METRIC TUBE - RPY IT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	For tube OD (x2) (mm)	Part Numbers
		1.398	0.787	-	0.413	0.504	6	4	RPY IT0604
		1.654	1.008	-	0.512	0.543	8	6	RPY IT0806
		1.953	1.087	-	0.571	0.661	10	8	RPY IT1008
		2.087	1.323	-	0.709	0.78	12	10	RPY IT1210
		2.228	1.559	-	0.965	0.965	16	12	RPY IT1612

PLUG-IN Y - FRACTIONAL INCH TUBE - RPY PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For fitting ID (in)	Part Numbers
		1.87	0.413	-	-	-	1/8	1/8	RPY PT1818
		1.87	0.413	-	-	-	5/32	5/32	RPY PT5353
		2.165	0.512	-	-	-	3/16	3/16	RPY PT3131
		2.165	0.512	-	-	-	1/4	1/4	RPY PT4141
		2.177	0.571	-	-	-	5/16	5/16	RPY PT5151
		2.76	0.709	-	-	-	3/8	3/8	RPY PT3838
		2.862	0.839	-	-	-	1/2	1/2	RPY PT2121

CONEX PUSH-TO-CONNECT FITTINGS


PLUG-IN Y - METRIC TUBE - RPY PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (x2) (mm)	Fitting ID (mm)	Part Numbers
		1.909	0.787	-	1.22	0.413	4	4	RPY PT0404
		2.165	1.008	-	1.299	0.512	6	6	RPY PT0606
		2.177	1.087	-	1.319	0.571	8	8	RPY PT0808
		2.787	1.323	-	1.791	0.709	10	10	RPY PT1010
		2.886	1.559	-	1.89	0.787	12	12	RPY PT1212
		2.984	1.787	-	1.929	0.917	14	14	RPY PT1414
		3.11	1.874	-	2.008	0.965	16	16	RPY PT1616

UNEQUAL PLUG-IN Y - FRACTIONAL INCH TUBE - RPY PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For fitting ID (in)	Part Numbers
		1.87	0.413	-	-	-	1/8	5/32	RPY PT5318
		2.083	0.413	-	-	-	5/32	1/4	RPY PT4153
		2.311	0.512	-	-	-	1/4	5/16	RPY PT5141
		2.709	0.571	-	-	-	5/16	3/8	RPY PT3851
		2.819	0.709	-	-	-	3/8	1/2	RPY PT2138

UNEQUAL PLUG IN Y - METRIC TUBE - RPY PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (x2) (mm)	Fitting ID (mm)	Part Numbers
		2.067	0.787	-	1.22	0.413	4	6	RPY PT0604
		2.165	1.008	-	1.319	0.512	6	8	RPY PT0806
		2.362	1.087	-	1.378	0.571	8	10	RPY PT1008
		2.787	1.323	-	1.791	0.709	10	12	RPY PT1210

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


EQUAL UNION TEE - FRACTIONAL INCH TUBE - RPT ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		1.378	0.689	-	-	0.394	1/8	RPT ET1818
		1.378	0.689	-	-	0.394	5/32	RPT ET5353
		1.575	0.787	-	-	0.504	3/16	RPT ET3131
		1.575	0.787	-	-	0.504	1/4	RPT ET4141
		1.795	0.898	-	-	0.543	5/16	RPT ET5151
		2.016	1.008	-	-	0.661	3/8	RPT ET3838
		2.236	1.118	-	-	0.807	1/2	RPT ET2121

EQUAL UNION TEE - METRIC TUBE - RPT ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.378	0.689	-	-	0.394	4	RPT ET0404
		1.575	0.787	-	-	0.504	6	RPT ET0606
		1.795	0.898	-	-	0.543	8	RPT ET0808
		2.126	1.063	-	-	0.661	10	RPT ET1010
		2.189	1.094	-	-	0.78	12	RPT ET1212
		2.441	1.22	-	-	0.894	14	RPT ET1414
		2.52	1.26	-	-	0.937	16	RPT ET1616

EQUAL CROSS - FRACTIONAL INCH TUBE - RPX ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.697	-	-	-	0.394	1/8	RPX ET1818
		0.697	-	-	-	0.394	5/32	RPX ET5353
		0.807	-	-	-	0.504	3/16	RPX ET3131
		0.807	-	-	-	0.504	1/4	RPX ET4141
		0.898	-	-	-	0.543	5/16	RPX ET5151
		1.035	-	-	-	0.661	3/8	RPX ET3838
		1.142	-	-	-	0.807	1/2	RPX ET2121

CONEX PUSH-TO-CONNECT FITTINGS


EQUAL CROSS - METRIC TUBE - RPX ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.394	-	-	-	0.394	4	RPX ET0404
		1.614	-	-	-	0.504	6	RPX ET0606
		1.795	-	-	-	0.543	8	RPX ET0808
		2.071	-	-	-	0.661	10	RPX ET1010
		2.307	-	-	-	0.78	12	RPX ET1212


EQUAL MULTIPLE TEE - FRACTIONAL INCH TUBE - RPN ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		2.323	1.591	0.512	-	-	5/32	RPN ET5353
		2.382	1.591	0.512	-	-	3/16	RPN ET3131
		2.382	1.591	0.512	-	-	1/4	RPN ET4141
		3.134	1.591	0.571	-	-	5/16	RPN ET5151

EQUAL MULTIPLE TEE - METRIC TUBE - RPN ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		2.323	0.768	-	-	0.394	4	RPN ET0404
		2.382	0.768	-	-	0.504	6	RPN ET0606
		3.134	0.945	-	-	0.543	8	RPN ET0808

UNEQUAL MULTIPLE TEE - FRACTIONAL INCH TUBE - RPN IT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For tube OD (in)	Part Numbers
		2.37	1.591	0.512	-	-	3/16	5/32	RPN IT3153
		2.37	1.591	0.512	-	-	1/4	5/32	RPN IT4153
		2.394	1.591	0.512	-	-	5/16	5/32	RPN IT5153
		2.394	1.591	0.512	-	-	5/32	3/16	RPN IT5131
		2.394	1.591	0.512	-	-	5/16	1/4	RPN IT5141
		3.189	1.85	0.571	-	-	3/8	1/4	RPN IT3841
		3.189	1.85	0.571	-	-	3/8	5/16	RPN IT3851

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


UNEQUAL MULTIPLE TEE - METRIC TUBE - RPN IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (x2) (mm)	For tube OD (x3) (mm)	Part Numbers
		2.37	0.768	-	-	0.504	6	4	RPN IT0604
		2.394	0.768	-	-	0.543	8	4	RPN IT0804
		2.394	0.768	-	-	0.543	8	6	RPN IT0806
		3.189	0.906	-	-	0.661	10	6	RPN IT1006
		3.189	0.945	-	-	0.661	10	8	RPN IT1008


PLUG - FRACTIONAL INCH TUBE - RPH PT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting ID (in)	Part Numbers
		1.181	0.61	0.079	0.197	-	1/8	RPH PT1818
		1.181	0.61	0.079	0.197	-	5/32	RPH PT5353
		1.26	0.65	0.098	0.236	-	3/16	RPH PT3131
		1.299	0.709	0.118	0.268	-	1/4	RPH PT4141
		1.441	0.728	0.154	0.354	-	5/16	RPH PT5151
		1.626	0.807	0.189	0.413	-	3/8	RPH PT3838
		1.709	0.906	0.228	0.52	-	1/2	RPH PT2121

PLUG - METRIC TUBE - RPH PT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting ID (mm)	Part Numbers
		1.181	-	-	0.61	0.079	4	RPH PT0404
		1.339	-	-	0.709	0.118	6	RPH PT0606
		1.457	-	-	0.728	0.157	8	RPH PT0808
		1.555	-	-	0.807	0.197	10	RPH PT1010
		1.732	-	-	0.906	0.236	12	RPH PT1212

HOSE PLUG - FRACTIONAL INCH TUBE - RPH EE


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.61	0.394	-	-	-	1/8	RPH EE1818
		0.61	0.394	-	-	-	5/32	RPH EE5353
		0.614	0.504	-	-	-	3/16	RPH EE3131
		0.709	0.504	-	-	-	1/4	RPH EE4141
		0.709	0.543	-	-	-	5/16	RPH EE5151
		0.76	0.661	-	-	-	3/8	RPH EE3838
		0.827	0.807	-	-	-	1/2	RPH EE2121

CONEX PUSH-TO CONNECT FITTINGS MICRO PRESSURE REGULATING VALVES

TUBE/MALE THREAD VALVE THREE WAYS - INLET TUBE/OUTLET MALE MNPT - RPS PR

 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
	1.587	0.295	9/16	1.004	1.299	1/8" MNPT	1/4	RPS PR4120
	1.587	0.354	9/16	1.004	1.417	1/4" MNPT	1/4	RPS PR4121
	1.587	0.433	11/16	1.004	1.437	3/8" MNPT	1/4	RPS PR4122
	1.587	0.295	9/16	1.016	1.299	1/8" MNPT	5/16	RPS PR5120
	1.587	0.354	9/16	1.016	1.339	1/4" MNPT	5/16	RPS PR5121
	1.587	0.433	11/16	1.016	1.437	3/8" MNPT	5/16	RPS PR5122
	1.752	0.354	11/16	1.224	1.634	1/4" MNPT	3/8	RPS PR3821
	1.752	0.433	11/16	1.224	1.693	3/8" MNPT	3/8	RPS PR3822
	1.752	0.433	7/8	1.252	1.693	3/8" MNPT	1/2	RPS PR2122
	1.752	0.472	7/8	1.252	1.831	1/2" MNPT	1/2	RPS PR2123

TUBE/MALE THREAD VALVE THREE WAYS - INLET TUBE/OUTLET MALE BSPT - RPS PR


 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
	1.587	0.295	14	1.004	1.004	1/8" MBSP	6	RPS PR0600
	1.587	0.354	14	1.004	1.004	1/4" MBSP	6	RPS PR0601
	1.587	0.433	17	1.004	1.004	3/8" MBSP	6	RPS PR0602
	1.587	0.295	14	1.016	1.016	1/8" MBSP	8	RPS PR0800
	1.587	0.354	14	1.016	1.016	1/4" MBSP	8	RPS PR0801
	1.587	0.433	17	1.016	1.016	3/8" MBSP	8	RPS PR0802
	1.752	0.354	19	1.224	1.224	1/4" MBSP	10	RPS PR1001
	1.752	0.433	19	1.224	1.224	3/8" MBSP	10	RPS PR1002
	1.752	0.512	21	1.224	1.224	1/2" MBSP	10	RPS PR1003
	1.752	0.354	19	1.252	1.252	1/4" MBSP	12	RPS PR1201
	1.752	0.433	19	1.252	1.252	3/8" MBSP	12	RPS PR1202
	1.752	0.512	21	1.252	1.252	1/2" MBSP	12	RPS PR1203

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE THREAD/TUBE VALVE THREE WAYS - INLET MALE NPT/OUTLET FRACTIONAL INCH TUBE - RPS TR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		1.587	0.295	9/16	1.004	1.299	1/4" MNPT	1/8	RPS TR4120
		1.587	0.354	9/16	1.004	1.417	1/4" MNPT	1/4	RPS TR4121
		1.587	0.433	11/16	1.004	1.437	1/4" MNPT	3/8	RPS TR4122
		1.587	0.295	9/16	1.016	1.299	5/16" MNPT	1/8	RPS TR5120
		1.587	0.354	9/16	1.016	1.339	5/16" MNPT	1/4	RPS TR5121
		1.587	0.433	11/16	1.016	1.437	5/16" MNPT	3/8	RPS TR5122
		1.752	0.354	11/16	1.224	1.634	1/4" MNPT	3/8	RPS TR3821
		1.752	0.433	11/16	1.224	1.693	3/8" MNPT	3/8	RPS TR3822
		1.752	0.433	7/8	1.252	1.693	1/2" MNPT	3/8	RPS TR2122
		1.752	0.472	7/8	1.252	1.831	1/2" MNPT	1/2	RPS TR2123

MALE THREAD/TUBE VALVE THREE WAYS - INLET MALE BSPT/OUTLET METRIC TUBE - RPS TR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.587	0.295	14	1.004	1.28	1/8" MBSP	6	RPS TR0600
		1.587	0.354	14	1.004	1.339	1/4" MBSP	6	RPS TR0601
		1.587	0.433	17	1.004	1.398	3/8" MBSP	6	RPS TR0602
		1.587	0.295	14	1.016	1.28	1/8" MBSP	8	RPS TR0800
		1.587	0.354	14	1.016	1.339	1/4" MBSP	8	RPS TR0801
		1.587	0.433	17	1.016	1.398	3/8" MBSP	8	RPS TR0802
		1.752	0.354	19	1.224	1.555	1/4" MBSP	10	RPS TR1001
		1.752	0.433	19	1.224	1.654	3/8" MBSP	10	RPS TR1002
		1.752	0.512	21	1.224	1.732	1/2" MBSP	10	RPS TR1003
		1.752	0.354	19	1.252	1.555	1/4" MBSP	12	RPS TR1201
		1.752	0.433	19	1.252	1.654	3/8" MBSP	12	RPS TR1202
		1.752	0.512	21	1.252	1.732	1/2" MBSP	12	RPS TR1203

CONEX PUSH-TO CONNECT FITTINGS MICRO PRESSURE REGULATING VALVES

MALE THREAD VALVE THREE WAYS - INLET MALE NPT/OUTLET MALE NPT - RPS DR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	NPT male thread	Part Numbers
		1.587	0.315	9/16	1.299	1.299	1/8" MNPT	1/8" MNPT	RPS DR2020
		1.587	0.433	9/16	1.417	1.299	1/4" MNPT	1/8" MNPT	RPS DR2120
		1.587	0.433	9/16	1.417	1.417	1/4" MNPT	1/4" MNPT	RPS DR2121
		1.752	0.472	11/16	1.693	1.634	3/8" MNPT	1/4" MNPT	RPS DR2221
		1.752	0.472	11/16	1.693	1.693	3/8" MNPT	3/8" MNPT	RPS DR2222
		1.752	0.591	7/8	1.831	1.693	1/2" MNPT	3/8" MNPT	RPS DR2322
		1.752	0.591	7/8	1.831	1.831	1/2" MNPT	1/2" MNPT	RPS DR2323

MALE THREAD VALVE THREE WAYS - INLET MALE BSPT/OUTLET MALE BSPT - RPS DR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	BSPT male thread	Part Numbers
		1.587	0.295	14	1.28	1.28	1/8" MBSP	1/8" MBSP	RPS DR0000
		1.587	0.354	14	1.339	13.091	1/4" MBSP	1/8" MBSP	RPS DR0100
		1.587	0.354	14	1.339	1.339	1/4" MBSP	1/4" MBSP	RPS DR0101
		1.752	0.433	17	1.654	1.555	3/8" MBSP	1/4" MBSP	RPS DR0201
		1.752	0.433	17	1.654	1.654	3/8" MBSP	1/8" MBSP	RPS DR0202
		1.752	0.512	21	1.732	1.654	1/2" MBSP	3/8" MBSP	RPS DR0302
		1.752	0.512	21	1.732	1.732	1/2" MBSP	1/2" MBSP	RPS DR0303

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

EQUAL VALVE THREE WAYS FOR TUBE - METRIC TUBE TO TUBE - RPS ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		2.008	1.587	-	1.004	-	6	RPS ET0606
		2.031	1.587	-	1.016	-	8	RPS ET0808
		2.449	1.752	-	1.224	-	10	RPS ET1010
		2.504	1.752	-	1.252	-	12	RPS ET1212

UNEQUAL VALVE THREE WAYS - FRACTIONAL INCH TUBE TO TUBE - RPS IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	For tube OD (in)	Part Numbers
		2.02	1.587	-	1.004	-	5/16	1/4	RPS IT5141
		2.476	1.752	-	1.224	-	1/2	3/8	RPS IT2138

CONEX PUSH-TO CONNECT FITTINGS MICRO PRESSURE REGULATING VALVES


Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


UNEQUAL VALVE THREE WAYS - METRIC TUBE TO TUBE - RPS IT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	For tube OD (mm)	Part Numbers
		2.02	1.587	-	1.016	-	8	6	RPS IT0806
		2.476	1.752	-	1.252	-	12	10	RPS IT1210



EQUAL VALVE THREE WAYS - FRACTIONAL INCH TUBE TO TUBE - RPS ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		2.008	1.587	-	1.004	-	1/4	RPS ET4141
		2.031	1.587	-	1.016	-	5/16	RPS ET5151
		2.449	1.752	-	1.224	-	3/8	RPS ET3838
		2.504	1.752	-	1.252	-	1/2	RPS ET2121



CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS


Operating
pressure
0 to 145 psi

Temperature
+32°F to +140°F


Construction
Polymer and
nickel-plated
brass

CONNECTORS

MALE FLOW REGULATOR WITH KNOB (CONTROL IN) - FRACTIONAL INCH TUBE TO 10-32 UNF - RPM IG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPM IG1826
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPM IG5326
		0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPM IG3126
		0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPM IG4126

MALE FLOW REGULATOR WITH KNOB (CONTROL IN) - FRACTIONAL INCH TUBE TO MALE NPT - RPM IR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPM IR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPM IR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPM IR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPM IR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPM IR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPM IR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPM IR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPM IR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPM IR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPM IR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPM IR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPM IR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPM IR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPM IR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPM IR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPM IR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPM IR2123

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS

MALE FLOW REGULATOR WITH KNOB (CONTROL IN) - METRIC TUBE TO MALE BSPT - RPM IR

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.654	0.866	10	1.299	0.551	1/8" MBSP	4	RPM IR0400
		1.929	0.945	14	1.575	0.717	1/4" MBSP	4	RPM IR0401
		1.614	0.906	10	1.319	0.571	1/8" MBSP	6	RPM IR0600
		1.929	1.004	14	1.575	0.717	1/4" MBSP	6	RPM IR0601
		2.283	1.067	19	1.85	0.866	3/8" MBSP	6	RPM IR0602
		2.48	1.185	24	1.969	1.079	1/2" MBSP	6	RPM IR0603
		1.614	0.969	10	1.319	0.571	1/8" MBSP	8	RPM IR0800
		1.929	1.055	14	1.575	0.717	1/4" MBSP	8	RPM IR0801
		2.283	1.134	19	1.85	0.866	3/8" MBSP	8	RPM IR0802
		2.48	1.201	24	1.969	1.079	1/2" MBSP	8	RPM IR0803
		1.614	1.122	10	1.319	0.571	1/8" MBSP	10	RPM IR1000
		1.929	1.22	14	1.575	0.717	1/4" MBSP	10	RPM IR1001
		2.283	1.22	19	1.85	0.866	3/8" MBSP	10	RPM IR1002
		2.48	1.339	24	1.969	1.079	1/2" MBSP	10	RPM IR1003
		1.929	1.252	14	1.575	0.717	1/4" MBSP	12	RPM IR1201
		2.283	1.339	19	1.85	0.866	3/8" MBSP	12	RPM IR1202
		2.48	1.409	24	1.969	1.079	1/2" MBSP	12	RPM IR1203

MALE FLOW REGULATOR WITH KNOB (CONTROL OUT) - 10-32 UNF TO FRACTIONAL INCH TUBE - RPM OG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD	Part Numbers
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPM OG1826
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPM OG5326
		0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPM OG3126
		0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPM OG4126

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE FLOW REGULATOR WITH KNOB (CONTROL OUT) - MALE NPT TO FRACTIONAL INCH TUBE - RPM OR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPM OR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPM OR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPM OR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPM OR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPM OR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPM OR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPM OR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPM OR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPM OR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPM OR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPM OR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPM OR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPM OR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPM OR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPM OR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPM OR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPM OR2123

MALE FLOW REGULATOR WITH KNOB (CONTROL OUT) - MALE BSPT TO METRIC TUBE - RPM OR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.535	0.858	10	1.24	0.571	1/8" MBSP	4	RPM OR0400
		1.969	0.945	14	1.614	0.717	1/4" MBSP	4	RPM OR0401
		1.535	0.906	10	1.24	0.571	1/8" MBSP	6	RPM OR0600
		1.969	1.004	14	1.614	0.717	1/4" MBSP	6	RPM OR0601
		2.323	1.067	19	1.89	0.866	3/8" MBSP	6	RPM OR0602
		2.48	1.185	24	1.969	1.079	1/2" MBSP	6	RPM OR0603
		1.535	0.969	10	1.24	0.571	1/8" MBSP	8	RPM OR0800
		1.969	1.055	14	1.614	0.717	1/4" MBSP	8	RPM OR0801
		2.323	1.134	19	1.89	0.866	3/8" MBSP	8	RPM OR0802
		2.48	1.201	24	1.969	1.079	1/2" MBSP	8	RPM OR0803
		1.535	1.122	10	1.24	0.571	1/8" MBSP	10	RPM OR1000
		1.969	1.22	14	1.614	0.717	1/4" MBSP	10	RPM OR1001
		2.323	1.22	19	1.89	0.866	3/8" MBSP	10	RPM OR1002
		2.48	1.339	24	1.969	1.079	1/2" MBSP	10	RPM OR1003
		1.969	1.252	14	1.614	0.717	1/4" MBSP	12	RPM OR1201
		2.323	1.339	19	1.89	0.571	3/8" MBSP	12	RPM OR1202
		2.48	1.409	24	1.969	1.079	1/2" MBSP	12	RPM OR1203

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS

MALE FLOW REGULATOR WITH KNOB (BI-DIRECTIONAL) - FRACTIONAL INCH TO 10-32 UNF - RPM BG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPM BG1826
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPM BG5326
		0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPM BG3126
		0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPM BG4126

MALE FLOW REGULATOR WITH KNOB (BI-DIRECTIONAL) - FRACTIONAL INCH TUBE TO MALE NPT - RPM BR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPM BR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPM BR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPM BR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPM BR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPM BR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPM BR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPM BR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPM BR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPM BR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPM BR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPM BR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPM BR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPM BR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPM BR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPM BR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPM BR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPM BR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE FLOW REGULATOR WITH KNOB (BI-DIRECTIONAL) - METRIC TUBE TO MALE BSPT - RPM BR


 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
	1.654	0.858	10	1.358	0.571	1/8" MBSP	4	RPM BR0400
	1.811	0.945	14	1.457	0.717	1/4" MBSP	4	RPM BR0401
	1.654	0.906	10	1.358	0.571	1/8" MBSP	6	RPM BR0600
	1.811	1.004	14	1.457	0.717	1/4" MBSP	6	RPM BR0601
	2.185	1.067	19	1.752	0.866	3/8" MBSP	6	RPM BR0602
	2.421	1.185	24	1.909	1.079	1/2" MBSP	6	RPM BR0603
	1.654	0.969	10	1.358	0.571	1/8" MBSP	8	RPM BR0800
	1.811	1.055	14	1.457	0.717	1/4" MBSP	8	RPM BR0801
	2.185	1.134	19	1.752	0.866	3/8" MBSP	8	RPM BR0802
	2.421	1.201	24	1.909	1.079	1/2" MBSP	8	RPM BR0803
	1.654	1.122	10	1.358	0.571	1/8" MBSP	10	RPM BR1000
	1.811	1.22	14	1.457	0.717	1/4" MBSP	10	RPM BR1001
	2.185	1.22	19	1.752	0.866	3/8" MBSP	10	RPM BR1002
	2.421	1.339	24	1.909	1.079	1/2" MBSP	10	RPM BR1003
	1.811	1.252	14	1.457	0.717	1/4" MBSP	12	RPM BR1201
	2.185	1.339	19	1.752	0.866	3/8" MBSP	12	RPM BR1202
	2.421	1.409	24	1.909	1.079	1/2" MBSP	12	RPM BR1203

MALE FLOW REGULATOR WITH KNOB (BI-DIRECTIONAL) - METRIC TUBE TO M5 - RPM BG


 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
	1.26	0.776	8	1.102	0.394	M5	4	RPM BG04M5
	1.26	0.886	8	1.102	0.394	M5	6	RPM BG06M5

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL IN) - FRACTIONAL INCH TUBE TO 10-32 UNF - RPV IG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPV IG1826
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPV IG5326
		0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPV IG3126
		0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPV IG4126

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL IN) - FRACTIONAL INCH TUBE TO MALE NPT - RPV IR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPV IR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPV IR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPV IR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPV IR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPV IR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPV IR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPV IR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPV IR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPV IR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPV IR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPV IR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPV IR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPV IR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPV IR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPV IR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPV IR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPV IR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL IN) - METRIC TUBE TO MALE BSPT - RPV IR


 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
	1.299	0.858	10	1.004	0.571	1/8" MBSP	4	RPV IR0400
	1.614	0.945	14	1.26	0.717	1/4" MBSP	4	RPV IR0401
	1.299	0.906	10	1.004	0.571	1/8" MBSP	6	RPV IR0600
	1.614	1.004	14	1.26	0.717	1/4" MBSP	6	RPV IR0601
	2.047	1.067	19	1.614	0.866	3/8" MBSP	6	RPV IR0602
	2.244	1.185	24	1.732	1.079	1/2" MBSP	6	RPV IR0603
	1.299	0.969	10	1.004	0.571	1/8" MBSP	8	RPV IR0800
	1.614	1.055	14	1.26	0.717	1/4" MBSP	8	RPV IR0801
	2.047	1.134	19	1.614	0.866	3/8" MBSP	8	RPV IR0802
	2.244	1.201	24	1.732	1.079	1/2" MBSP	8	RPV IR0803
	1.299	1.122	10	1.004	0.571	1/8" MBSP	10	RPV IR1000
	1.614	1.22	14	1.26	0.717	1/4" MBSP	10	RPV IR1001
	2.047	1.22	19	1.614	0.866	3/8" MBSP	10	RPV IR1002
	2.244	1.339	24	1.732	1.079	1/2" MBSP	10	RPV IR1003
	1.614	1.252	14	1.26	0.717	1/4" MBSP	12	RPV IR1201
	2.047	1.339	19	1.614	0.866	3/8" MBSP	12	RPV IR1202
	2.244	1.409	24	1.732	1.079	1/2" MBSP	12	RPV IR1203

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL OUT) - 10-32 UNF TO FRACTIONAL INCH TUBE - RPV OG


 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
	0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPV OG1826
	0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPV OG5326
	0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPV OG3126
	0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPV OG4126

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL OUT) MALE NPT TO FRACTIONAL INCH TUBE - RPV OR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPV OR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPV OR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPV OR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPV OR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPV OR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPV OR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPV OR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPV OR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPV OR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPV OR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPV OR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPV OR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPV OR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPV OR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPV OR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPV OR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPV OR2123

MALE FLOW REGULATOR WITH ADJUSTING SCREW (CONTROL OUT) MALE BSPT TO METRIC TUBE - RPV OR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		1.299	0.858	10	1.004	0.571	1/8" MBSP	4	RPV OR0400
		1.614	0.945	14	1.26	0.717	1/4" MBSP	4	RPV OR0401
		1.299	0.906	10	1.004	0.571	1/8" MBSP	6	RPV OR0600
		1.614	1.004	14	1.26	0.717	1/4" MBSP	6	RPV OR0601
		2.047	1.067	19	1.614	0.866	3/8" MBSP	6	RPV OR0602
		2.244	1.185	24	1.732	1.079	1/2" MBSP	6	RPV OR0603
		1.299	0.969	10	1.004	0.571	1/8" MBSP	8	RPV OR0800
		1.614	1.055	14	1.26	0.717	1/4" MBSP	8	RPV OR0801
		2.047	1.134	19	1.614	0.866	3/8" MBSP	8	RPV OR0802
		2.244	1.201	24	1.732	1.079	1/2" MBSP	8	RPV OR0803
		1.299	1.122	10	1.004	0.571	1/8" MBSP	10	RPV OR1000
		1.614	1.22	14	1.26	0.717	1/4" MBSP	10	RPV OR1001
		2.047	1.22	19	1.614	0.866	3/8" MBSP	10	RPV OR1002
		2.244	1.339	24	1.732	1.079	1/2" MBSP	10	RPV OR1003
		1.614	1.252	14	1.26	0.717	1/4" MBSP	12	RPV OR1201
		2.047	1.339	19	1.614	0.866	3/8" MBSP	12	RPV OR1202
		2.244	1.409	24	1.732	1.079	1/2" MBSP	12	RPV OR1203

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

MALE REGULATOR WITH ADJUSTING SCREW (BI-DIRECTIONAL) 10-32 UNF TO FRACTIONAL INCH TUBE - RPV BG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	1/8	RPV BG1826
		0.776	0.157	5/16	0.362	0.394	10-32 UNF	5/32	RPV BG5326
		0.886	0.157	5/16	0.362	0.504	10-32 UNF	3/16	RPV BG3126
		0.886	0.157	1	0.362	0.504	10-32 UNF	1/4	RPV BG4126

MALE REGULATOR WITH ADJUSTING SCREW (BI-DIRECTIONAL) FRACTIONAL INCH TUBE TO MALE NPT - RPV BR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	1/8	RPV BR1820
		0.858	0.315	1/2	0.472	0.394	1/8" MNPT	5/32	RPV BR5320
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	3/16	RPV BR3120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	3/16	RPV BR3121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	3/16	RPV BR3122
		0.906	0.315	1/2	0.472	0.504	1/8" MNPT	1/4	RPV BR4120
		1.004	0.433	9/16	0.472	0.504	1/4" MNPT	1/4	RPV BR4121
		1.067	0.472	3/4	0.606	0.504	3/8" MNPT	1/4	RPV BR4122
		0.969	0.315	1/2	0.472	0.543	1/8" MNPT	5/16	RPV BR5120
		1.055	0.433	9/16	0.472	0.543	1/4" MNPT	5/16	RPV BR5121
		1.134	0.472	3/4	0.606	0.543	3/8" MNPT	5/16	RPV BR5122
		1.201	0.591	1	0.689	0.543	1/2" MNPT	5/16	RPV BR5123
		1.22	0.433	9/16	0.472	0.661	1/4" MNPT	3/8	RPV BR3821
		1.22	0.472	3/4	0.606	0.661	3/8" MNPT	3/8	RPV BR3822
		1.339	0.591	1	0.689	0.661	1/2" MNPT	3/8	RPV BR3823
		1.307	0.472	3/4	0.606	0.807	3/8" MNPT	1/2	RPV BR2122
		1.386	0.591	1	0.689	0.807	1/2" MNPT	1/2	RPV BR2123

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS


MALE REGULATOR WITH ADJUSTING SCREW (BI-DIRECTIONAL) METRIC TUBE TO MALE BSPT - RPV BR

A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
1.181	0.858	10	0.886	0.571	1/8" MBSP	4	RPV BR0400
1.575	0.945	14	1.22	0.717	1/4" MBSP	4	RPV BR0401
1.181	0.906	10	0.886	0.571	1/8" MBSP	6	RPV BR0600
1.575	1.004	14	1.22	0.717	1/4" MBSP	6	RPV BR0601
1.89	1.067	19	1.457	0.866	3/8" MBSP	6	RPV BR0602
2.185	1.185	24	1.673	1.079	1/2" MBSP	6	RPV BR0603
1.181	0.969	10	0.886	0.571	1/8" MBSP	8	RPV BR0800
1.575	1.055	14	1.22	0.717	1/4" MBSP	8	RPV BR0801
1.89	1.134	19	1.457	0.866	3/8" MBSP	8	RPV BR0802
2.185	1.201	24	1.673	1.079	1/2" MBSP	8	RPV BR0803
1.181	1.122	10	0.886	0.571	1/8" MBSP	10	RPV BR1000
1.575	1.22	14	1.22	0.717	1/4" MBSP	10	RPV BR1001
1.89	1.22	19	1.457	0.866	3/8" MBSP	10	RPV BR1002
2.185	1.339	24	1.673	1.079	1/2" MBSP	10	RPV BR1003
1.575	1.252	14	1.22	0.717	1/4" MBSP	12	RPV BR1201
1.89	1.339	19	1.457	0.866	3/8" MBSP	12	RPV BR1202
2.185	1.409	24	1.673	1.079	1/2" MBSP	12	RPV BR1203

TUBE/ MALE THREAD FLOW REGULATOR ONE WAY FRACTIONAL INCH TUBE TO MALE NPT - RPL PR






A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
0.945	0.315	7/16	1.24	0.413	1/8" MNPT	1/8	RPL PR1820
0.945	0.315	7/16	1.24	0.413	1/8" MNPT	5/32	RPL PR5320
0.965	0.315	1/2	1.28	0.437	1/8" MNPT	3/16	RPL PR3120
0.965	0.315	1/2	1.28	0.437	1/8" MNPT	1/4	RPL PR4120
0.965	0.433	9/16	1.378	0.437	1/4" MNPT	1/4	RPL PR4121
1.083	0.315	9/16	1.37	0.472	1/8" MNPT	5/16	RPL PR5120
1.083	0.433	9/16	1.488	0.472	1/4" MNPT	5/16	RPL PR5121
1.083	0.472	11/16	1.547	0.472	3/8" MNPT	5/16	RPL PR5122
1.24	0.315	11/16	1.508	0.48	1/8" MNPT	3/8	RPL PR3820
1.24	0.433	11/16	1.626	0.48	1/4" MNPT	3/8	RPL PR3821
1.24	0.472	11/16	1.665	0.48	3/8" MNPT	3/8	RPL PR3822
1.24	0.591	7/8	1.823	0.48	1/2" MNPT	3/8	RPL PR3823
1.476	0.433	3/4	1.764	0.614	1/8" MNPT	1/2	RPL PR2120
1.476	0.433	3/4	1.882	0.614	1/4" MNPT	1/2	RPL PR2121
1.476	0.472	3/4	1.921	0.614	3/8" MNPT	1/2	RPL PR2122
1.476	0.591	7/8	2.059	0.614	1/2" MNPT	1/2	RPL PR2123

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass

TUBE/ MALE THREAD FLOW REGULATOR ONE WAY - METRIC TUBE TO MALE BSPT - RPL PR


		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
		0.945	0.295	10	1.224	0.413	1/8" MBSP	4	RPL PR0400
		0.965	0.295	12	1.24	0.437	1/8" MBSP	6	RPL PR0600
		0.965	0.354	14	1.299	0.437	1/4" MBSP	6	RPL PR0601
		1.083	0.295	14	1.35	0.472	1/8" MBSP	8	RPL PR0800
		1.083	0.354	14	1.409	0.472	1/4" MBSP	8	RPL PR0801
		1.083	0.433	17	1.508	0.472	3/8" MBSP	8	RPL PR0802
		1.24	0.354	17	1.571	0.48	1/4" MBSP	10	RPL PR1001
		1.24	0.433	17	1.65	0.48	3/8" MBSP	10	RPL PR1002
		1.24	0.512	21	1.728	0.48	1/2" MBSP	10	RPL PR1003
		1.476	0.354	19	1.78	0.614	1/4" MBSP	12	RPL PR1201
		1.476	0.433	19	1.858	0.614	3/8" MBSP	12	RPL PR1202
		1.476	0.512	21	1.937	0.614	1/2" MBSP	12	RPL PR1203

MALE THREAD/TUBE FLOW REGULATOR ONE WAY - FRACTIONAL INCH TUBE TO MALE NPT - RPL TR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.945	0.315	7/16	1.24	0.413	1/8" MNPT	1/8	RPL TR1820
		0.945	0.315	7/16	1.24	0.413	1/8" MNPT	5/32	RPL TR5320
		0.965	0.315	1/2	1.28	0.437	1/8" MNPT	3/16	RPL TR3120
		0.965	0.315	1/2	1.28	0.437	1/8" MNPT	1/4	RPL TR4120
		0.965	0.433	9/16	1.378	0.437	1/4" MNPT	1/4	RPL TR4121
		1.083	0.315	9/16	1.37	0.472	1/8" MNPT	5/16	RPL TR5120
		1.083	0.433	9/16	1.488	0.472	1/4" MNPT	5/16	RPL TR5121
		1.083	0.472	11/16	1.547	0.472	3/8" MNPT	5/16	RPL TR5122
		1.24	0.315	11/16	1.508	0.48	1/8" MNPT	3/8	RPL TR3820
		1.24	0.433	11/16	1.626	0.48	1/4" MNPT	3/8	RPL TR3821
		1.24	0.472	11/16	1.665	0.48	3/8" MNPT	3/8	RPL TR3822
		1.24	0.591	7/8	1.823	0.48	1/2" MNPT	3/8	RPL TR3823
		1.476	0.433	3/4	1.764	0.614	1/8" MNPT	1/2	RPL TR2120
		1.476	0.433	3/4	1.882	0.614	1/4" MNPT	1/2	RPL TR2121
		1.476	0.472	3/4	1.921	0.614	3/8" MNPT	1/2	RPL TR2122
		1.476	0.591	7/8	2.059	0.614	1/2" MNPT	1/2	RPL TR2123

CONEX PUSH-TO CONNECT FITTINGS FLOW REGULATORS

TUBE/ MALE THREAD FLOW REGULATOR ONE WAY - METRIC TUBE TO MALE BPST - RPL TR

 	A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	For tube OD (mm)	Part Numbers
	0.945	0.295	10	1.224	0.413	1/8" MBSP	4	RPL TR0400
	0.965	0.295	12	1.24	0.437	1/8" MBSP	6	RPL TR0600
	0.965	0.354	14	1.299	0.437	1/4" MBSP	6	RPL TR0601
	1.083	0.295	14	1.35	0.472	1/8" MBSP	8	RPL TR0800
	1.083	0.354	14	1.409	0.472	1/4" MBSP	8	RPL TR0801
	1.083	0.433	17	1.508	0.472	3/8" MBSP	8	RPL TR0802
	1.24	0.354	17	1.571	0.48	1/4" MBSP	10	RPL TR1001
	1.24	0.433	17	1.65	0.48	3/8" MBSP	10	RPL TR1002
	1.24	0.512	21	1.728	0.48	1/2" MBSP	10	RPL TR1003
	1.476	0.354	19	1.78	0.614	1/4" MBSP	12	RPL TR1201
	1.476	0.433	19	1.858	0.614	3/8" MBSP	12	RPL TR1202
	1.476	0.512	21	1.937	0.614	1/2" MBSP	12	RPL TR1203

MALE THREAD FLOW REGULATOR ONE WAY - MALE NPT - RPL DR


 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	Part Numbers
	1.28	0.315	1/2	0.413	-	1/8" MNPT	RPL DR2020
	1.488	0.433	9/16	0.472	-	1/4" MNPT	RPL DR2121
	1.665	0.472	11/16	0.48	-	3/8" MNPT	RPL DR2222
	2.059	0.591	7/8	0.614	-	1/2" MNPT	RPL DR2323

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MALE THREAD FLOW REGULATOR ONE WAY - MALE BSPT - RPL DR

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPT male thread	Part Numbers
		1.22	0.217	12	0.437	-	1/8" MBSP	RPL DR0000
		1.35	0.236	14	0.472	-	1/4" MBSP	RPL DR0101
		1.551	0.256	17	0.48	-	3/8" MBSP	RPL DR0202
		1.78	0.315	21	0.614	-	1/2" MBSP	RPL DR0303

TUBE FLOW REGULATOR ONE WAY - FRACTIONAL INCH TUBE - RPL ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		1.89	0.413	-	-	0.394	1/8	RPL ET1818
		1.89	0.413	-	-	0.394	5/32	RPL ET5353
		1.913	0.437	-	-	0.504	3/16	RPL ET3131
		1.929	0.437	-	-	0.504	1/4	RPL ET4141
		2.169	0.472	-	-	0.543	5/16	RPL ET5151
		2.48	0.48	-	-	0.661	3/8	RPL ET3838
		2.913	0.622	-	-	0.807	1/2	RPL ET2121

TUBE FLOW REGULATOR ONE WAY - METRIC TUBE - RPL ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.496	1.142	-	-	-	4	RPL ET0404
		1.929	1.693	-	-	-	6	RPL ET0606
		2.169	1.89	-	-	-	8	RPL ET0808
		2.48	2.126	-	-	-	10	RPL ET1010
		2.953	2.283	-	-	-	12	RPL ET1212

CONEX PUSH-TO-CONNECT MICRO FITTINGS


MICRO STRAIGHT MALE CONNECTOR - FRACTIONAL INCH TUBE TO 10-32 UNF - RCD MG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.591	0.138	5/16	-	-	10-32 UNF	1/8	RCD MG1826
		0.689	0.138	5/16	-	-	10-32 UNF	5/32	RCD MG5326
		0.839	0.138	13/32	-	-	10-32 UNF	1/4	RCD MG4126


MICRO STRAIGHT MALE CONNECTOR - FRACTIONAL INCH TUBE TO MALE NPT - RCD MR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.669	0.315	13/32	-	-	1/8" MNPT	1/8	RCD MR1820
		0.815	0.315	13/32	-	-	1/8" MNPT	1/4	RCD MR4120
		0.689	0.315	13/32	-	-	1/8" MNPT	5/32	RCD MR5320


STRAIGHT MALE CONNECTOR - METRIC TUBE TO MALE BSPP - RCD MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP male thread	For tube OD (mm)	Part Numbers
		0.591	0.453	10	0.394	-	1/8" MBSP	4	RCD MG0400
		0.689	0.453	10	0.492	-	1/8" MBSP	6	RCD MG0600

MICRO STRAIGHT MALE CONNECTOR - METRIC TUBE TO MALE M3, M5 - RCD MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		0.669	0.362	8	0.551	-	M3	4	RCD MG04M3
		0.689	0.362	8	0.551	-	M5	4	RCD MG04M5
		0.787	0.453	10	0.65	-	M5	6	RCD MG06M5

MICRO STRAIGHT FEMALE CONNECTOR - FRACTIONAL INCH TO TUBE 10-32 UNF - RCD FG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.638	0.197	5/16	-	0.276	10-32 UNF	1/8	RCD FG1826
		0.736	0.197	5/16	-	0.315	10-32 UNF	5/32	RCD FG5326
		0.795	0.197	13/32	-	0.394	10-32 UNF	1/4	RCD FG4126

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MICRO STRAIGHT FEMALE CONNECTOR - FRACTIONAL INCH TUBE TO FEMALE NPT - RCD FR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT female thread	For tube OD (in)	Part Numbers
		0.717	0.374	1/2	-	0.276	1/8" FNPT	1/8	RCD FR1820
		0.933	0.374	1/2	-	0.315	1/8" FNPT	5/32	RCD FR5320
		0.913	0.374	1/2	-	0.394	1/8" FNPT	1/4	RCD FR4120


MICRO STRAIGHT FEMALE CONNECTOR - METRIC TUBE TO FEMALE BSPP - RCD FG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP female thread	For tube OD (mm)	Part Numbers
		0.894	0.551	12	0.539	-	1/8" FBSP	4	RCD FG0400
		0.894	0.551	12	0.539	-	1/8" FBSP	6	RCD FG0600


MICRO STRAIGHT FEMALE CONNECTOR - METRIC TUBE TO FEMALE M3, M5 - RCD FG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric female threading	For tube OD (mm)	Part Numbers
		0.717	0.374	8	0.539	-	M3	4	RCD FG04M3
		0.736	0.374	8	0.539	-	M5	4	RCD FG04M5
		0.795	0.472	10	0.598	-	M5	6	RCD FG06M5

MICRO MALE ELBOW - FRACTIONAL INCH TUBE TO MALE NPT - RCC MR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		-	0.315	13/32	0.504	0.276	1/8" MNPT	1/8	RCC MR1820
		-	0.315	13/32	0.618	0.335	1/8" MNPT	5/32	RCC MR5320
		-	0.315	13/32	0.657	0.413	1/8" MNPT	1/4	RCC MR4120

MICRO MALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RCC MG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		-	0.138	5/16	0.504	0.276	10-32 UNF	1/8	RCC MG1826
		-	0.138	13/32	0.618	0.335	10-32 UNF	5/32	RCC MG5326
		-	0.138	13/32	0.657	0.413	10-32 UNF	1/4	RCC MG4126

CONEX PUSH-TO-CONNECT MICRO FITTINGS


MALE ELBOW - METRIC TUBE TO MALE BSPP - RCC MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP male thread	For tube OD (mm)	Part Numbers
		0.65	0.618	10	0.354	0.335	1/8" MBSP	4	RCC MG0400
		0.728	0.657	10	0.433	0.413	1/8" MBSP	6	RCC MG0600


MICRO MALE ELBOW - METRIC TUBE TO M3, M5 - RCC MG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		0.492	0.618	8	0.374	0.335	M3	4	RCC MG04M3
		0.512	0.618	8	0.374	0.335	M5	4	RCC MG04M5
		0.709	0.657	10	0.571	0.413	M5	6	RCC MG06M5

MICRO EXTENDED MALE ELBOW - FRACTIONAL INCH TUBE TO 10-32 UNF - RCC LR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.787	0.138	5/16	0.504	0.276	10-32 UNF	1/8	RCC LR1826
		0.965	0.138	5/16	0.618	0.335	10-32 UNF	5/32	RCC LG5326
		1.122	0.138	13/32	0.657	0.413	10-32 UNF	1/4	RCC LG4126

MICRO EXTENDED MALE ELBOW - FRACTIONAL INCH TUBE TO MALE NPT


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.846	0.315	13/32	0.504	0.276	1/8" MNPT	1/8	RCC LR1820
		1.102	0.315	13/32	0.618	0.335	1/8" MNPT	5/32	RCC LR5320
		1.201	0.315	13/32	0.657	0.413	1/8" MNPT	1/4	RCC LR4120

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MICRO EXTENDED MALE ELBOW - METRIC TUBE TO MALE BSPP - RCC LG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP male thread	For tube OD (mm)	Part Numbers
		1.378	0.618	10	1.083	0.335	1/8" MBSP	4	RCC LG0400
		1.476	0.657	10	1.181	0.413	1/8" MBSP	6	RCC LG0600


MICRO EXTENDED MALE ELBOW - METRIC TUBE TO M3, M5 - RCC LG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.063	0.618	8	0.945	0.335	M3	4	RCC LG04M3
		1.102	0.618	8	0.965	0.335	M5	4	RCC LG04M5
		1.26	0.65	10	1.122	0.413	M5	6	RCC LG06M5

MICRO MALE TEE PIECE - FRACTIONAL INCH TUBE TO 10-32 UNF - RCT CG


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.591	0.138	5/16	0.457	0.276	10-32 UNF	1/8	RCT CG1826
		0.638	0.138	5/16	0.543	0.335	10-32 UNF	5/32	RCT CG5326
		0.835	0.138	13/32	0.689	0.413	10-32 UNF	1/4	RCT CG4126

MICRO MALE TEE PIECE - FRACTIONAL INCH TUBE TO MALE NPT - RCT CR

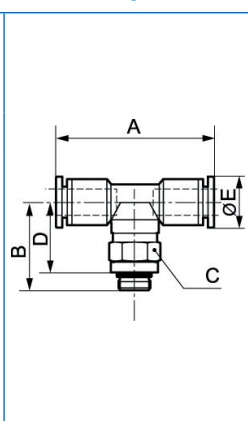
		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.65	0.315	13/32	0.457	0.276	1/8" MNPT	1/8	RCT CR1820
		0.776	0.315	13/32	0.543	0.335	1/8" MNPT	5/32	RCT CR5320
		0.874	0.315	13/32	0.689	0.413	1/8" MNPT	1/4	RCT CR4120

CONEX PUSH-TO-CONNECT MICRO FITTINGS


MICRO TEE PIECE - METRIC TUBE TO MALE BSPP - RCT CG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP male thread	For tube OD (mm)	Part Numbers
		1.087	0.756	10	0.461	0.335	1/8" MBSP	4	RCT CG0400
		1.378	0.854	10	0.559	0.413	1/8" MBSP	6	RCT CG0600


MICRO MALE TEE PIECE - METRIC TUBE TO M3, M5 - RCT CG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.087	0.618	8	0.5	0.335	M3	4	RCT CG04M3
		1.087	0.638	8	0.5	0.335	M5	4	RCT CG04M5
		1.063	0.835	10	0.697	0.413	M5	6	RCT CG06M5

MICRO MALE RUN TEE - FRACTIONAL INCH TUBE TO 10-32 UNF - RCT AG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.591	0.138	5/16	0.457	0.276	10-32 UNF	1/8	RCT AG1826
		0.638	0.138	5/16	0.543	0.335	10-32 UNF	5/32	RCT AG5326
		0.835	0.138	13/32	0.689	0.413	10-32 UNF	1/4	RCT AG4126

MICRO MALE RUN TEE - FRACTIONAL INCH TO MALE NPT - RCT AR


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	NPT male thread	For tube OD (in)	Part Numbers
		0.65	0.315	13/32	0.457	0.276	1/8" MNPT	1/8	RCT AR1820
		0.776	0.315	13/32	0.543	0.335	1/8" MNPT	5/32	RCT AR5320
		0.874	0.315	13/32	0.689	0.413	1/8" MNPT	1/4	RCT AR4120

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MICRO MALE RUN TEE - METRIC TUBE TO MALE BSPP - RCT AG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	BSPP male thread	For tube OD (mm)	Part Numbers
		1.299	0.543	10	1.004	0.335	1/8" MBSP	4	RCT AG0400
		1.543	0.689	10	1.248	0.413	1/8" MBSP	6	RCT AG0600


MICRO MALE RUN TEE - METRIC TUBE TO MALE M3, M5 - RCT AG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.161	0.543	8	1.043	0.335	M3	4	RCT AG04M3
		1.181	0.543	8	1.043	0.335	M5	4	RCT AG04M5
		1.366	0.531	10	1.228	0.413	M5	6	RCT AG06M5

MICRO EQUAL STRAIGHT UNION - FRACTIONAL INCH TUBE - RCU ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.807	-	-	-	0.276	1/8	RCU ET1818
		0.921	-	-	-	0.335	5/32	RCU ET5353
		1.102	-	-	-	0.413	1/4	RCU ET4141

MICRO EQUAL STRAIGHT UNION - METRIC TUBE - RCU ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		0.921	0.335	-	-	-	4	RCU ET0404
		1.102	0.413	-	-	-	6	RCU ET0606

CONEX PUSH-TO-CONNECT MICRO FITTINGS


MICRO BULKHEAD FITTING - FRACTIONAL INCH TUBE - RCU TT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Panel thickness (in)	Drill Ø (in)	For tube OD (in)	Part Numbers
		0.465	0.929	0.394	-	0.283	0.4	0.3	1/8	RCU TT1818
		0.516	1.031	0.472	-	0.374	0.4	0.4	5/32	RCU TT5353
		0.516	1.031	0.551	-	0.421	0.4	0.5	1/4	RCU TT4141


MICRO BULKHEAD FITTING - METRIC TUBE - RCU TT

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Panel thickness (in)	Drill Ø (in)	For tube OD (mm)	Part Numbers
		1.031	0.551	12	0.374	0.374	0.4	0.4	4	RCU TT0404
		1.031	0.65	14	0.374	0.421	0.4	0.5	6	RCU TT0606


90° MICRO EQUAL ELBOW - FRACTIONAL INCH TUBE - RCC ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.807	-	-	-	0.276	1/8	RCC ET1818
		0.921	-	-	-	0.335	5/32	RCC ET5353
		1.102	-	-	-	0.413	1/4	RCC ET4141

90° MICRO EQUAL ELBOW - METRIC TUBE - RCC ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		0.618	0.335	-	-	-	4	RCC ET0404
		0.701	0.413	-	-	-	6	RCC ET0606

MICRO EQUAL TEE PIECE - FRACTIONAL INCH TUBE - RCT ET


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		0.457	0.457	-	-	0.276	1/8	RCT ET1818
		0.543	0.543	-	-	0.335	5/32	RCT ET5353
		0.728	0.728	-	-	0.413	1/4	RCT ET4141

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MICRO EQUAL TEE PIECE - METRIC TUBE - RCT ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.087	0.543	-	-	0.335	4	RCT ET0404
		1.457	0.728	-	-	0.413	6	RCT ET0606


MICRO EQUAL Y PIECE - FRACTIONAL INCH TUBE - RCY ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		1.142	-	0.335	-	0.335	5/32	RCY ET5353
		1.26	-	0.413	-	0.413	1/4	RCY ET4141


MICRO EQUAL Y PIECE - METRIC TUBE - RCY ET

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (mm)	Part Numbers
		1.142	0.669	-	0.335	0.335	4	RCY ET0404
		1.26	0.827	-	0.413	0.413	6	RCY ET0606

MICRO MALE FLOW REGULATOR WITH KNOB (CONTROL IN) - FRACTIONAL TUBE TO 10-32 UNF - RCM IG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.362	0.138	5/16	0.598	0.394	10-32 UNF	1/8	RCM IG1826

MICRO MALE FLOW REGULATOR WITH ADJUSTING KNOB (CONTROL IN) - METRIC TUBE TO MALE M5 - RCM IG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.26	0.709	8	1.122	0.394	M5	4	RCM IG04M5


CONEX PUSH-TO-CONNECT MICRO FITTINGS

Operating
pressure
0 to 145 psi


Temperature
+32°F to +140°F

Construction
Polymer and
nickel-plated
brass


MICRO MALE FLOW REGULATOR WITH ADJUSTING KNOB (CONTROL OUT) FRACTIONAL INCH TUBE TO 10-32 UNF - RCM OG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.362	0.138	5/16	0.709	0.394	10-32 UNF	5/32	RCM OG5326


MICRO MALE FLOW REGULATOR WITH ADJUSTING KNOB (CONTROL OUT) METRIC TUBE TO MALE M5 - RCM OG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.26	0.709	8	1.122	0.394	M5	4	RCM OG04M5

MICRO MALE FLOW REGULATOR WITH ADJUSTING KNOB (BI-DIRECTIONAL) FRACTIONAL INCH TUBE TO 10-32 UNF - RCM BG

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	UNF thread	For tube OD (in)	Part Numbers
		0.362	0.138	5/16	0.717	0.394	10-32 UNF	1/4	RCM BG4126

MICRO MALE FLOW REGULATOR WITH ADJUSTING KNOB (BI-DIRECTIONAL) METRIC TUBE - RCM BG

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	Metric male threading	For tube OD (mm)	Part Numbers
		1.26	0.709	8	1.122	0.394	M5	4	RCM BG04M5

ASSOCIATED PRODUCTS



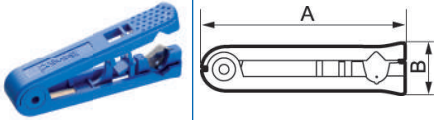
Polyamide tubes
p 230

PUSH FITTINGS ACCESSORIES

DISCONNECTION TOOL - R22

	A (inch)	B (inch)	Description	Part Numbers
	-	-	Disconnection tool	R22 TD
				

TUBE CUTTER - R22 CT

	A (inch)	B (inch)	Description	Part Numbers
	4.409	1.102	Tube cutter Specially designed to get a 90° clean cut	R22 CT
				

7 Connecting parts

A range for all configurations

These products allows users to customize their systems into numerous configurations.

This wide range of hose connectors and the extensive selection of parts (plugs, reducers, brackets, T couplings, cross couplings, stoppers, bulk head fittings, etc.) are available with all thread types and are ideal for customizing a piping system.

■ FLUIDS

Air, water, inert fluids




■ THREADS

- Tapered thread for connections with sealant applied:

ASME 1.20.1 standard

Thread sizes from 1/8" to 3/4"



Part type	Material	Pressure
Connectors	Nickel-plated brass	0 to 217 psi
Joiners	Steel	0 to 217 psi




HOSE TAILS

Technology
Straight through
path

Operating
pressure
0 to 217 psi


CONNECTORS

BRASS HOSE BARB

 	A (inch)	B (inch)	NPT male thread	For hose ID (in)	Part Numbers
	1.76	0.561	1/4" MNPT	1/4" Hose Barb	JFT 14251
	1.732	0.551	1/4" MNPT	3/8" Hose Barb	JFT 38251
	1.732	0.748	3/8" MNPT	3/8" Hose Barb	JFT 38252
	1.929	0.945	1/2" MNPT	3/8" Hose Barb	JFT 38253
	1.76	0.683	3/8" MNPT	1/2" Hose Barb	JFT 12252
	1.969	0.874	1/2" MNPT	1/2" Hose Barb	JFT 12253

Component: brass

PARALLEL MALE THREAD - HOSE TAIL - 1 BARB

 	A (inch)	B (mm)	BSPP male thread	For hose ID (mm)	Part Numbers
	1.693	14	1/8" MBSP	4	JFT 1804ZS
	1.693	14	1/8" MBSP	6	JFT 1806ZS
	1.811	17	1/4" MBSP	6	JFT 1406ZS
	1.811	17	1/4" MBSP	8	JFT 1408ZS
	1.811	17	1/4" MBSP	9	JFT 1409ZS
	1.811	17	1/4" MBSP	10	JFT 1410ZS
	1.85	19	1/8" MBSP	8	JFT 3808ZS
	1.85	19	1/8" MBSP	10	JFT 3810ZS
	2.047	19	1/8" MBSP	13	JFT 3813ZS
	2.047	23	1/8" MBSP	16	JFT 3816ZS
	2.087	23	1/2" MBSP	8	JFT 1208ZS
	2.087	23	1/2" MBSP	9	JFT 1209ZS
	2.087	23	1/2" MBSP	10	JFT 1210ZS
	2.087	23	1/2" MBSP	13	JFT 1213ZS
	2.126	23	1/2" MBSP	16	JFT 1216ZS
	2.283	29	3/4" MBSP	16	JFT 3416ZS


Component: treated steel

HOSE TAILS


Technology
Straight through
path

Operating
pressure
0 to 217 psi


BRASS PUSH-ON FITTING (STOFLEX HOSE ONLY - NO CLAMPS)

		A (inch)	B (inch)	NPT male thread	For hose ID	Part Numbers
		1.732	0.551	1/4" MNPT	3/8"	PON 38251
		1.732	0.748	3/8" MNPT	3/8"	PON 38252
		Assembly without any hose-O-clip with hose Lockflex Component: brass				

BRASS HOSE BARB

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.969	0.551	3/8" Hose Barb	JDT 3838
		Component: brass			

BRASS PUSH-ON FITTING (STOFLEX HOSE ONLY -NO CLAMPS)

		A (inch)	B (inch)	For hose ID	Part Numbers
		1.969	0.551	3/8" Push-on-Hose Barb	PON JDT3838
		For assembly without any hose-O-clip on hose partnumber Lockflex Component: brass			


FITTINGS UNIONS REDUCERS

Operating
pressure
0 to 217 psi


Construction
Brass and nickel-
plated brass

CONNECTORS


BRASS HEX NIPPLE

		A (inch)	B (inch)	NPT male thread	NPT male thread	Part Numbers
		0.65	0.551	1/8" MNPT		A1 250250
		0.827	0.669	1/4" MNPT		A1 251251
		0.906	0.748	3/8" MNPT		A1 252252
		1.004	0.945	1/2" MNPT		A1 253253
		1.004	0.945	3/4" MNPT	1/2" MNPT	A1 254253

BRASS UNION

		A (inch)	B (inch)	NPT female thread	Part Numbers
		0.591	0.551	1/8" FNPT	A3 200200
		0.866	0.669	1/4" FNPT	A3 201201
		0.945	0.866	3/8" FNPT	A3 202202
		1.181	1.024	1/2" FNPT	A3 203203

BRASS BUSHING


		A (inch)	B (inch)	NPT male thread	NPT female thread	Part Numbers
		0.63	0.551	1/4" MNPT	1/8" FNPT	A4 251200
		0.65	0.669	3/8" MNPT	1/8" FNPT	A4 252200
		0.65	0.669	3/8" MNPT	1/4" FNPT	A4 252201
		0.768	0.866	1/2" MNPT	1/4" FNPT	A4 253201
		0.768	0.866	1/2" MNPT	3/8" FNPT	A4 253202
		0.768	0.945	3/4" MNPT	1/4" FNPT	A4 254201

FITTINGS EXTENDERS PLUGS

Operating
pressure
0 to 217 psi

Construction
Brass and nickel-
plated brass

HEXAGONAL MALE PLUG


		A (inch)	B (inch)	NPT male thread	Part Numbers
		0.787	0.354	1/2" MNPT	A7 203
		0.984	0.551	3/4" MNPT	A7 204

FITTINGS - ELBOWS TEE PIECES

Operating
pressure
0 to 217 psi


Construction
Brass and nickel-
plated brass

BRASS ELBOW




A (inch)	B (inch)	C (inch)	NPT female thread	NPT female thread	Part Numbers
1.087	0.85	0.425	1/8" FNPT	1/8" FNPT	A9 200200
1.425	1.098	0.512	1/4" FNPT	1/4" FNPT	A9 201201
1.575	1.181	0.669	3/8" FNPT	3/8" FNPT	A9 202202
1.843	1.378	0.78	1/2" FNPT	1/2" FNPT	A9 203203

BRASS STREET ELBOW



A (inch)	B (inch)	C (inch)	NPT male thread	NPT female thread	Part Numbers
1.028	0.866	0.429	1/8" MNPT	1/8" FNPT	A10 200250
1.327	1.122	0.504	1/4" MNPT	1/4" FNPT	A10 201251
1.496	1.138	0.508	3/8" MNPT	3/8" FNPT	A10 202252
1.76	1.402	0.78	1/2" MNPT	1/2" FNPT	A10 203253

BRASS TEE




A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
1.543	0.768	0.461	3x 1/8" FNPT	A11 200
2.043	1.008	0.508	3x 1/4" FNPT	A11 201
2.244	1.134	0.622	3x 3/8" FNPT	A11 202
2.638	1.35	0.772	3x 1/2" FNPT	A11 203

FITTINGS Y PIECES

Operating
pressure
0 to 217 psi


Construction
Brass and nickel-
plated brass

FEMALE EQUAL Y PIECE



A (inch)	B (inch)	C (mm)	D (inch)	BSPP female thread	Part Numbers
1.457	0.807	20	-	3/8" FBSP	Y38
1.772	1.043	25	-	1/2" FBSP	Y12

MALE EQUAL Y PIECE



A (inch)	B (inch)	C (mm)	D (inch)	NPT male thread	Part Numbers
1.673	0.807	20	1.22	3/8" MBSP	Y38M
2.087	1.043	25	1.535	1/2" MBSP	Y12M

FITTINGS


CROSSES MANIFOLDS

Operating
pressure
0 to 217 psi

Construction
Brass and nickel-
plated brass

CONNECTORS


MANIFOLD BLOCK

 	A (inch)	B (inch)	NPT female thread	NPT female thread	Construction	Part Numbers
	6.102	1.417	1/2" FNPT	4 x 1/4" FNPT	Aluminum	A16 203201S4
	7.48	1.417	1/2" FNPT	5 x 1/4" FNPT	Aluminum	A16 203201S5

MANIFOLD - 3 WAYS


	A (inch)	B (inch)	NPT female thread	Construction	Part Numbers
	-	-	3x 1/4" FNPT	Aluminum	A15 201

FEMALE EQUAL CROSS

 	A (inch)	B (inch)	NPT female thread	Part Numbers
	1.535	0.768	4x 1/8" FNPT	A14 200
	1.969	0.986	4x 1/4" FNPT	A14 201
	2.205	1.103	4x 3/8" FNPT	A14 202


BI-DIRECTIONAL FITTING

BI-DIRECTIONAL FITTING WITH REGULATOR

		A (inch)	B (inch)	C (inch)	Description	Operating pressure	Part Numbers
		1.417	2.52	1.713	360° bi-directional fitting	Gauge 0 - 170 psi	OP BDMR201
		1.693	1.378	1.693	360° bi-directional fitting	Without gauge	OP BDR201

- Will keep the hose straight without restraint.
 - Improve pneumatic tools handling and use.
 - Inlet: 1/4" FBSP
 - Outlet: 1/4" MBSP

BI-DIRECTIONAL FITTING

		A (inch)	B (inch)	C (inch)	Description	Operating pressure	Part Numbers
		1.378	1.673	1.693	360° bi-directional fitting	Gauge 0 - 170 psi	OP BDM201
		1.693	2.283	1.693	360° bi-directional fitting	Without gauge	OP BD201

- Will keep the hose straight without restraint
 - Improve pneumatic tools handling and use
 - Inlet: 1/4" FBSP
 - Outlet: 1/4" MBSP

8

Industrial valves

Ball valves

Valves are necessary equipment for opening and closing air circuits without having to turn off the entire upstream air supply.

They are located throughout the system and used to shut off sections for maintenance, when changing tools, bleeding a line, etc.

Valve types

- Quarter-turn brass full-flow valves (RSI)
- Butterfly valves
- De-pressurization valves
- Padlockable stainless steel valves
- Double valves
- Mini-valves
- Programmable valves



Compliant with specified dimensions, tolerance and labelling for parallel threads.

LEAK FREE

Hot forging ensures that the valve body walls are free of micro-leaks.
PTFE stem gaskets ensure a leaktight seal and maintenance-free use.

EASY TO USE

Frequent opening and closing of the valves is facilitated by a long lever that is easy to maneuver.
The stem does not pass through the ball and is not subjected to any air pressure or risk of ejections.

HEAVY DUTY

- The valves are made from hot die-forged, high-purity brass and are carefully assembled to guarantee a tough body and long service life. Viton (FPM) gaskets withstand a wide range of applications.
- The valve bodies are nickel-plated and the operating lever is cadmium-plated, for excellent corrosion resistance.

Industrial valves

■ TECHNICAL SPECIFICATIONS

Brass ball valves	
Full-flow valves	• Low pressure losses, optimized flow rate
Working pressure (cold) for compressed air:	• 580 psi up to 1" NPT thread • 464 psi up to 2" NPT thread
Material	• Body and end connections made from high-quality brass to CW617N specifications: hot die-forged, sand blasted and nickel-plated • Self-lubricating pure PTFE seat with flexible edges • Hard chromium-plated brass ball • Viton (FPM) gaskets • Brass shaft • Silicone-free lubricant on all gaskets • Removable carbon steel handle with insulating blue PVC coating
Temperature	+4°F to +302°F




RoHS Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (lead, mercury, cadmium, hexavalent chromium, polybrominated bi-phenyls –PBBs– and polybrominated di-phenyl ethers –PBDEs–).



REACH regulations on the improvement of the management of risks related to the usage and dangerous properties of chemicals manufactured in or imported into the EU.

BALL VALVES


BALL VALVE - FULL FLOW BRASS



A (inch)	B (mm)	NPT female thread	Max operating pressure (psi)	Part Numbers
1.693	20	1/4" FNPT	580	RSI 201
1.693	20	3/8" FNPT	580	RSI 202
2.008	25	1/2" FNPT	580	RSI 203
2.323	31	3/4" FNPT	580	RSI 204
2.717	38	1" FNPT	580	RSI 205
3.228	48	1 1/4" FNPT	464	RSI 206
3.622	54	1 1/2" FNPT	464	RSI 207
4.409	66	2" FNPT	464	RSI 208

Temperature of use: -14°F to 176°F

BALL VALVE - MNPT/FNPT




A (inch)	B (mm)	NPT female thread	NPT male thread	Max operating pressure (psi)	Part Numbers
1.772	21	1/4" FNPT	1/4" MNPT	580	RSIMF 201
1.772	21	3/8" FNPT	3/8" MNPT	580	RSIMF 202
2.362	26	1/2" FNPT	1/2" MNPT	580	RSIMF 203
2.756	31	3/4" FNPT	3/4" MNPT	580	RSIMF 204

Temperature of use: -14°F to 176°F

OTHER VALVES


MINI BALL VALVE PN 16





A (inch)	B (inch)	C (inch)	NPT male thread	NPT female thread	Part Numbers
1.457	0.335	-	1/8" MNPT	1/8" FNPT	MSI 200250
1.811	0.512	-	1/4" MNPT	1/4" FNPT	MSI 201251
1.87	0.512	-	3/8" MNPT	3/8" FNPT	MSI 202252
2.362	0.669	-	1/2" MNPT	1/2" FNPT	MSI 203253
Reduced path Temperature range of use: from 14°F to +194°F Component: chrome brass					

SLIDE VALVE

A (inch)	B (inch)	C (mm)	NPT female thread	Part Numbers
1.89	-	14	1/8" FNPT	A17 200
2.283	-	17	1/4" FNPT	A17 201
2.756	-	22	3/8" FNPT	A17 202
3.15	0.039	26	1/2" FNPT	A17 203


Maximum pressure: 145 psi
Temperature of use: 14°F to +176°F

NON-RETURN VALVES


Construction
Brass body

Highlight
Network safety

CHECK VALVE

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.378	0.512	-	1/8" FNPT	A24 200
		1.614	0.669	-	1/4" FNPT	A24 201

MANUAL DRAIN

		A (inch)	B (inch)	C (inch)	BSPP male thread	NPT male thread	Part Numbers
		0.906	0.591	-	1/4" MBSP		MA 14
		0.906	0.551	-		1/4" MNPT	MA 14T

SEALING

Applications
Thread sealant

CONNECTORS

THREAD SEALANT



Description	Part Numbers
Sealant tube	ETANCHE 177
1.70 Oz tube Seals 1/8" to 1" threads in 2 hours Immediate curing at 77°F Pressure strength: 87 psi For steel and nickel-plated brass parts Purple color Shear strength: 17-23 N/mm ² after 24 hours	

TEFLON TAPE



Length (m)	Width (mm)	Thickness (mm)	Description (100 % PTFE)	Part Numbers
12	12	0.076	PTFE Tape	TEFLON 12

SEALING CORD



Description	Part Numbers
Impregnated multifilament cord Thread sealing tape 100 % PTFE	FLT 150
Impregnated multi-filament cord Length: 400 ft Maximum service pressure: - Compressed air: 10.8 psi - Water: 232 psi - Gas: 72 psi compatible with air, water, natural gas	

9

Compressed air
systems **PPS****PREVOST PIPING SYSTEM**100% **aluminum**

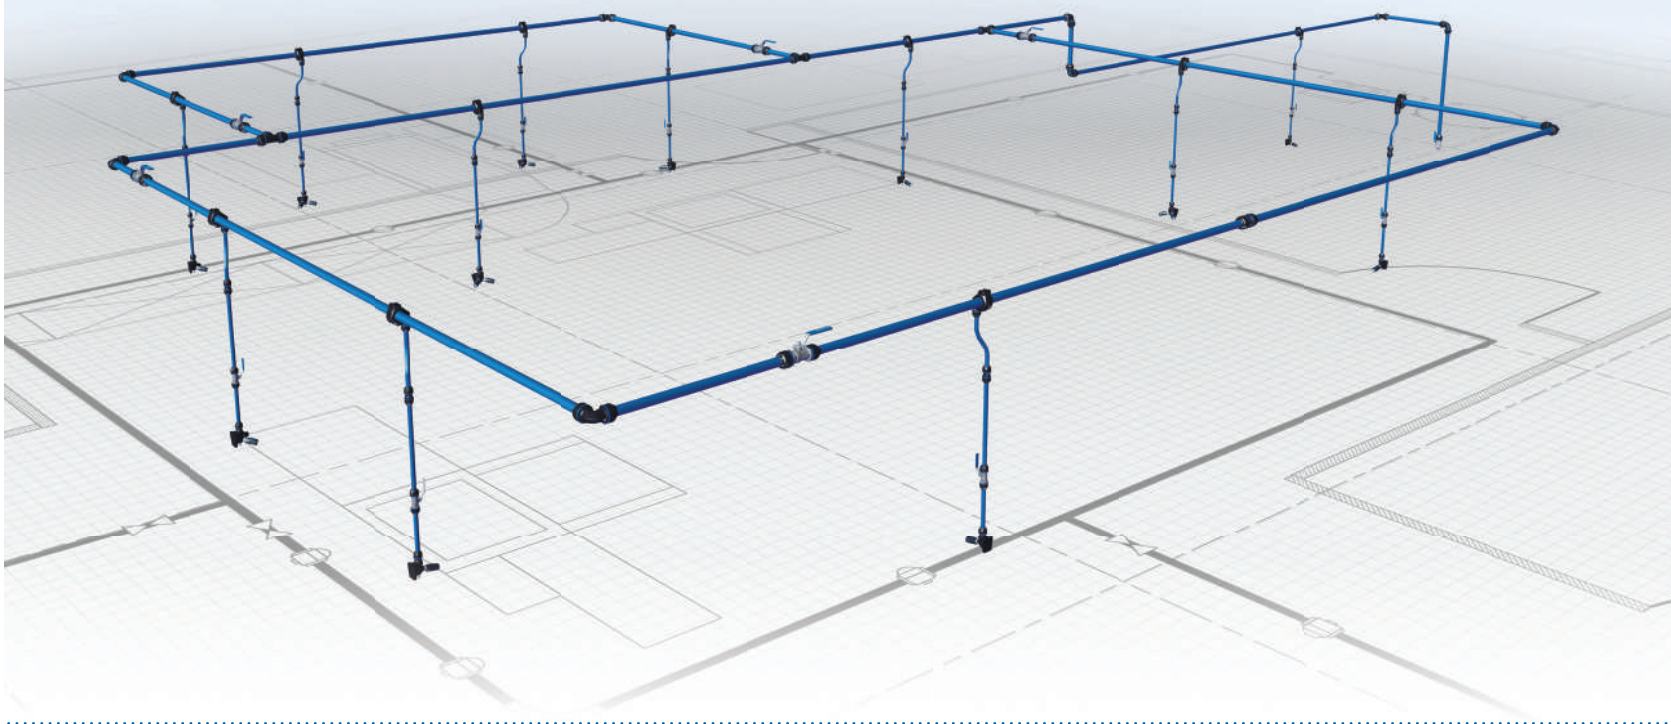
The **PREVOST PIPING SYSTEM** compressed air network range is compact, lightweight and corrosion resistant with all aluminum fittings.

The network can be pressurized immediately after a quick and easy installation.

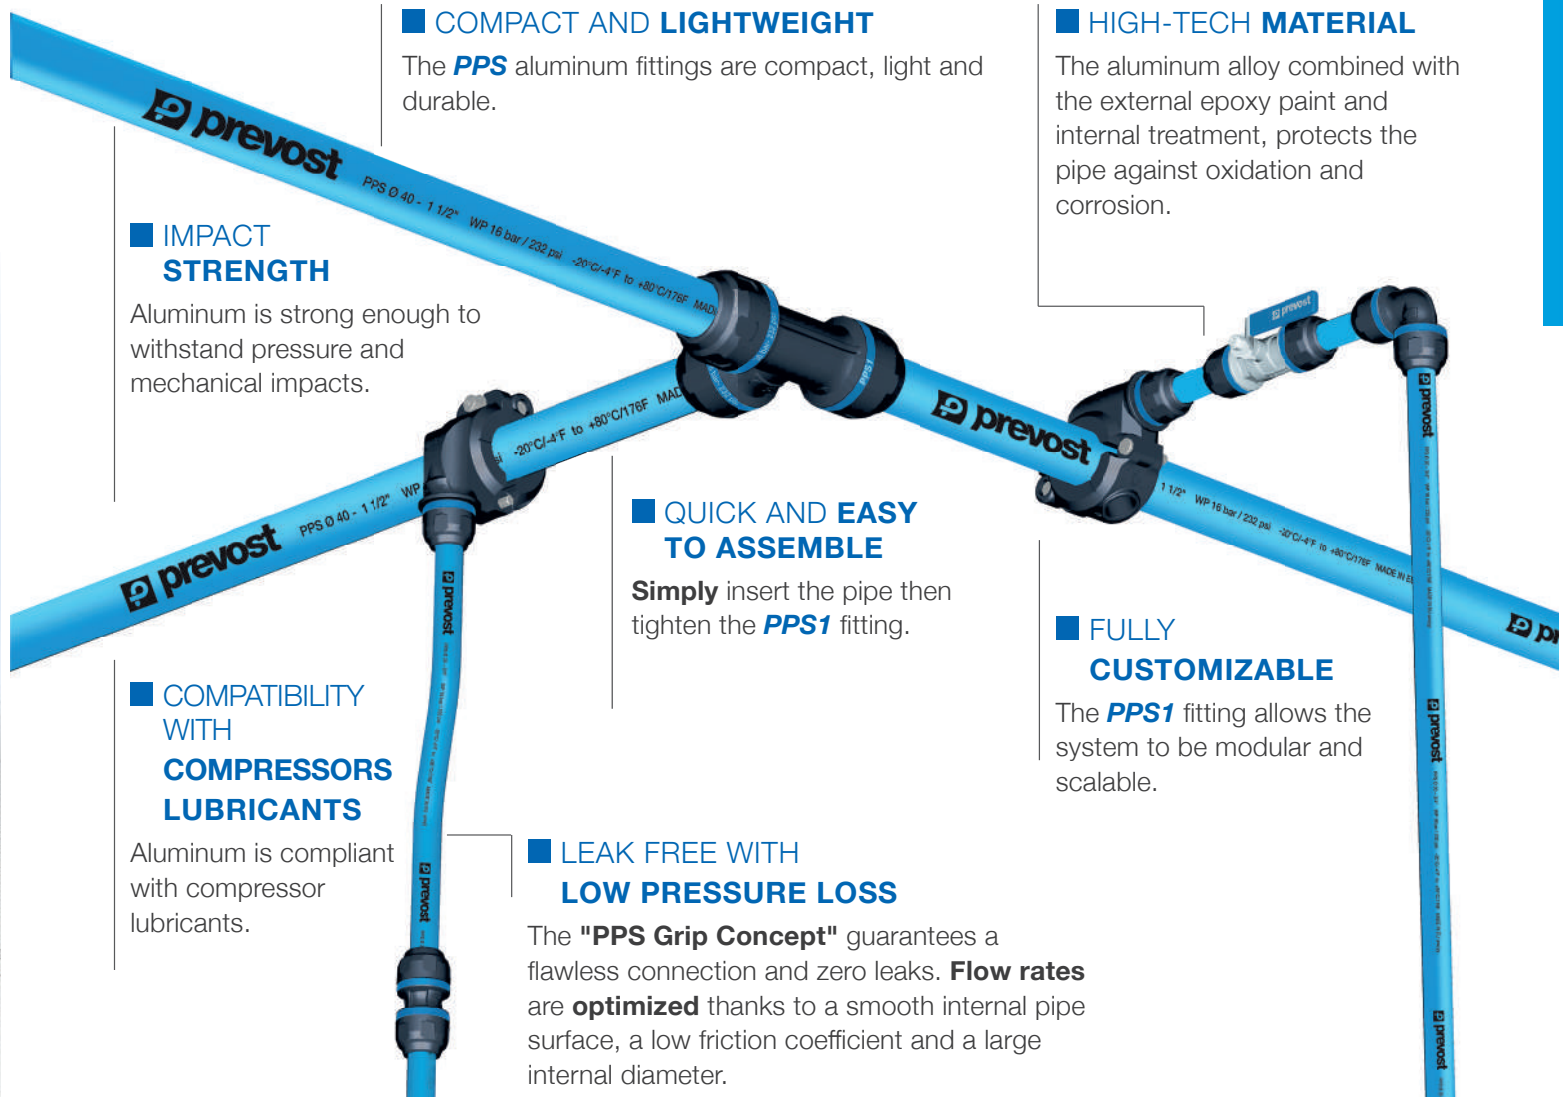
The PREVOST PIPING SYSTEM range guarantees:

- a clean and high quality air supply
- a leak free network with an optimized flow rate
- a maximum working pressure of 232 psi

The network will provide a long service life and can easily be configured so each workstation is well supplied, accessible and organized.



Advantages of the **PREVOST PIPING SYSTEM** range



■ COMPACT AND LIGHTWEIGHT

The **PPS** aluminum fittings are compact, light and durable.

■ HIGH-TECH MATERIAL

The aluminum alloy combined with the external epoxy paint and internal treatment, protects the pipe against oxidation and corrosion.

■ IMPACT STRENGTH

Aluminum is strong enough to withstand pressure and mechanical impacts.

■ QUICK AND EASY TO ASSEMBLE

Simply insert the pipe then tighten the **PPS1** fitting.

■ FULLY CUSTOMIZABLE

The **PPS1** fitting allows the system to be modular and scalable.

■ COMPATIBILITY WITH COMPRESSORS LUBRICANTS

Aluminum is compliant with compressor lubricants.

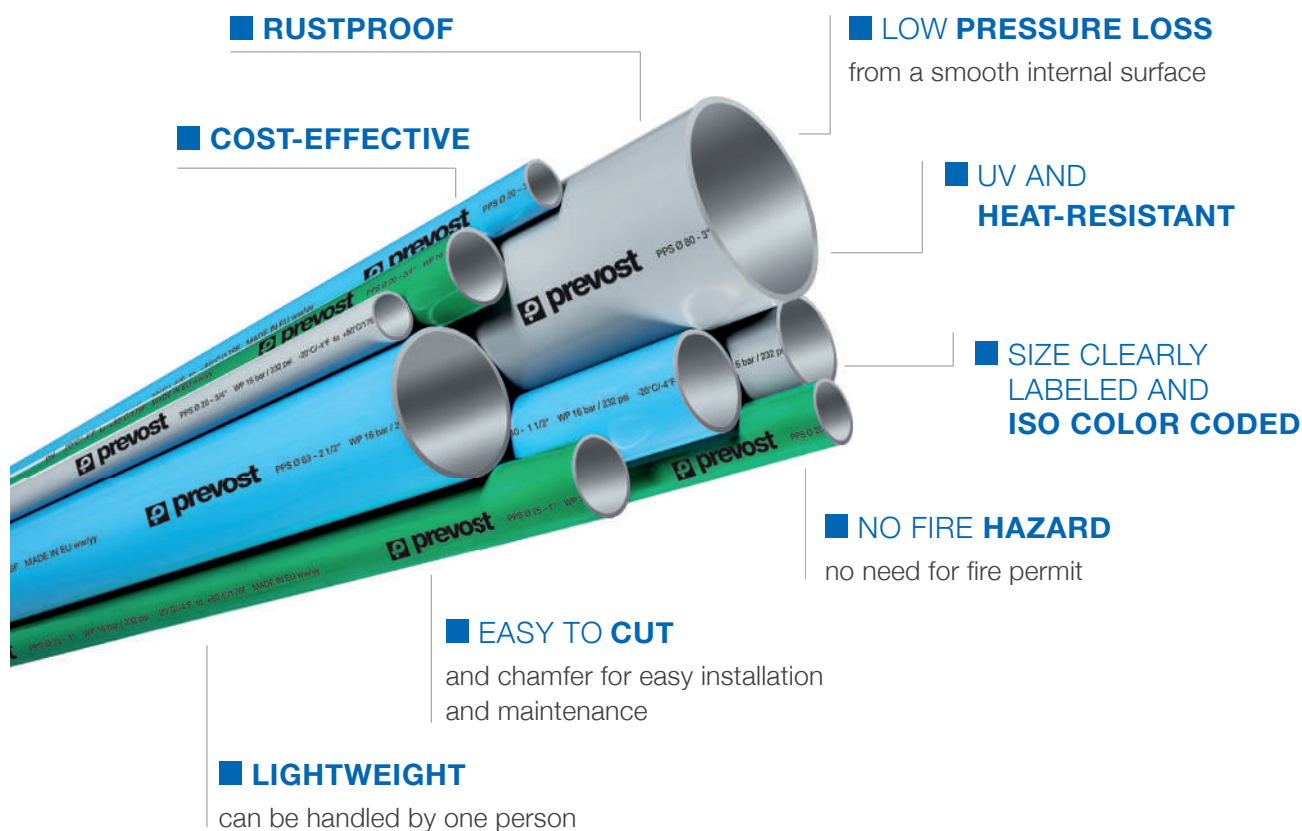
■ LEAK FREE WITH LOW PRESSURE LOSS

The "**PPS Grip Concept**" guarantees a flawless connection and zero leaks. **Flow rates** are **optimized** thanks to a smooth internal pipe surface, a low friction coefficient and a large internal diameter.

Compressed air **network PPS**

100% aluminum **pip**ing

PREVOST offers a wide range of 100% aluminum pipes for compressed air, vacuum and nitrogen systems.



■ PIPE PROPERTIES

- **Material:** extruded aluminum
EN AW 6060 T6 UNI-EN 573-3 alloy
- **Treatment:** interior and exterior (compliant with RoHS standard)
- **Coating:** electrostatic paint
- **Extrusion quality:** calibrated, seamless
- **Compatible fluids:** compressed air, vacuum, neutral gases
- **Pipe lengths:** 13.12 ft (4 meters) or 19.70 ft (6 meters)
- **Density:** 170 lb/ft³
- **Pipe external diameter:**
Ø 1/2" (16 mm), 3/4" (20 mm), 1" (25 mm),
1 1/4" (32 mm), 1 1/2" (40 mm), 2" (50 mm),
2 1/2" (63 mm), 3" (80 mm)

100% aluminum fittings

Pipes are firmly held in the fitting using the **PPS Grip Concept**.

This new concept is based on a stainless steel ring with teeth that penetrate the aluminum. The new contoured and lubricated seal design guarantees a leak free performance.

■ IDENTIFICATION

The PREVOST logo is engraved on each fitting

■ DIAMETER

Pipe external diameter
(mm and inches)

■ PRESSURE

Maximum service
pressure (bar/psi)

■ ID MARKER

To indicate that the pipe is
correctly positioned in the
fitting

■ TRACEABILITY

Clearly marked date of
manufacturing code



■ LEAK FREE

It is comprised of two
Teflon-coated lobes to create a
perfect leak free seal

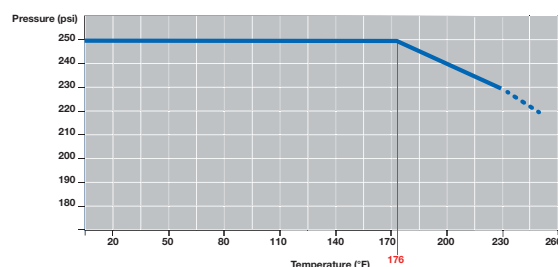
■ INTERNAL PARTS

Internal parts cannot be detached from
the body after assembly

■ TECHNICAL SPECIFICATIONS

- **Temperature range:** from -4°F to +176°F
- **Body and nut:** 100% aluminum, EN AB 46100
- **PPS Grip Concept:** fastening system using teeth
- **Maximum working pressure:** 232 psi
- **Vacuum level:** 0.59 inHg

Pressure graph
as a function of temperature



Compressed air **network PPS**

■ TAPPING PORT FLANGE

The body and nut are made **entirely of aluminum**. The tapping flange is extremely compact, and is fitted **with an anti-rotation** system and removable half-shell. The pipe can be drilled and the flange installed without disassembling the entire network.

The tapping flange provides a dry air supply to workstations by drawing air from the wall of the pipe.

The water remaining in the lower portion of the main pipe will drain to a low point by automatic drain trap.



A tapping flange provides a drop to drain condensates.

■ VALVES

Multiple options available:



Tube/Tube



Male threaded/Tube



Female threaded/Tube

■ TIGHTENING

A PREVOST tightening wrench is recommended to tighten the nut to the accurate specifications. Torque can be set using a torque wrench.



Network design

A compressed air network involves linking a source of compressed air and one or more compressors to a designated distribution point or points.

The supply line ring main is made of PREVOST aluminum pipes which are installed at a minimum of 8 ft. above floor level and forms the primary loop of the network.

From this main loop, drops (smaller diameter pipes) are installed. The end of a drop should be installed approximately 4 ft. from the ground. The drops form distribution points to plug in air powered equipment such as quick couplings, filters, hoses, etc.

NETWORK DESIGN CALCULATIONS

To design a network the pipe diameter must be calculated by taking the desired flow rate and the length of the main pipe. The data below is calculated for operating pressure of 116 psi (8 bar) with 5% pressure loss.

COMPRESSOR*					MAIN RING LENGTH								
POWER		FLOW			30 m	76 m	152 m	305 m	610 m	914 m	1219 m	1524 m	1981 m
kW	HP	Nm³/h	NI/min	Scfm	100 ft	250 ft	500 ft	1000 ft	2000 ft	3000 ft	4000 ft	5000 ft	6500 ft
2.2	3	22	367	13	1/2"	1/2"	3/4"	3/4"	1"	1"	1"	1 1/4"	1 1/4"
3	4	30	500	18	1/2"	1/2"	3/4"	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
4	5	40	668	24	1/2"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/2"
5.5	7.5	50	833	29	1/2"	3/4"	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/2"	1 1/2"
7.5	10	70	1167	41	3/4"	1"	1"	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
11	15	100	1667	59	1"	1"	1 1/4"	1 1/4"	1 1/2"	1 1/2"	2"	2"	2"
15	20	150	2500	88	1"	1 1/4"	1 1/4"	1 1/2"	2"	2"	2"	2"	2 1/2"
18	25	180	3000	106	1 1/4"	1 1/4"	1 1/2"	1 1/2"	2"	2"	2 1/2"	2 1/2"	2 1/2"
22	30	220	3674	130	1 1/4"	1 1/4"	1 1/2"	2"	2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
26	35	260	4167	147	1 1/2"	1 1/2"	1 1/2"	2"	2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
30	40	350	5833	206	1 1/2"	1 1/2"	2"	2"	2 1/2"	2 1/2"	2 1/2"	3"	3"
37	50	370	6179	218	1 1/2"	1 1/2"	2"	2"	2 1/2"	2 1/2"	3"	3"	3"
45	60	500	8350	294	2"	2"	2"	2 1/2"	2 1/2"	3"	3"	3"	3"
55	75	550	9185	324	2"	2"	2"	2 1/2"	2 1/2"	3"	3"	3"	
75	100	750	12500	441	2 1/2"	2 1/2"	2 1/2"	2 1/2"	3"	3"			
90	125	1000	16667	589	2 1/2"	2 1/2"	2 1/2"	3"	3"				
110	150	1100	18370	883	2 1/2"	2 1/2"	2 1/2"	3"					
132	175	1500	25000	1030	3"	3"	3"	3"					
160	215	1750	29167	1030	3"	3"	3"						
200	270	2000	33333	1177	3"	3"	3"						

* These values may differ slightly from the data provided by compressor manufacturers.

EXPANSION OF MATERIAL

As the temperature rises and falls, aluminum is subject to expansion and contraction. To compensate for these variables, it is recommended the system be designed to allow for movement.

For small diameters, a flexible hose can be used.

For larger diameters, use an expansion kit.

Expansion coefficient: 13.7×10^{-6} inch per inch per °F.

Expansion is calculated as follows:

C: Expansion coefficient

L: Length of the straight stretch (between two fixed points)


T: Difference between the maximum and minimum ambient temperatures in °F.

DL: Overall expansion

i.e. $DL: C \times L \times \Delta T$

Example: a 60 feet (720 inches) line using 1 1/2" piping, at an ambient temperature of 60°F with a maximum temperature of 100°F, i.e. a difference of 40°F.

DL: $13.7 \times 10^{-6} \times 720 \text{ (in)} \times 40^\circ\text{F} = 0.39 \text{ inch}$



Compressed air **network PPS**

Guidelines **for network installation**



Ideally, the compressor room should be spacious, well ventilated, insulated and separate from the rest of the workshop.

Machines must be connected to the PPS network with flexible hoses to eliminate problems related to vibrations and to allow for maintenance (part numbers LEM).

It is important to install bypasses between each machine, the tank(s) and filters.

The main network should form a loop. For safety reasons, we advise installing the main compressed air pipes at a minimum of 8.2 ft (2.50 m) above floor level.

The pipe must be fastened using an adequate number of sliding clamps so the system is securely held in place, yet allowing for expansion and contraction of the pipe (part numbers PPS1 CI).


To drain the remaining condensates from the main line, install drops which terminate in an automatic drain trap system.

■ MOUNTING THE NETWORK


Mounting options must be selected to best suit the configuration of the workshop.

When installing the network, pipes must be perfectly aligned and mounted to a sturdy surface.

For correct assembly, a 10 ft (3 m) distance should be left between the two clamps.



Mounting bracket is secured to a metal support that is installed directly into a wall



Mounting bracket is installed directly to the wall



Pipe suspended with a thread rod



Cable hung pipe

Assembly **guidelines**

TIGHTENING



Hand tighten the nut and then use a torque wrench to the specified recommendations.
(ref. PPS CLE)

CUTTING



The pipe must be cut perpendicular to its length (ref. PPS CTU)

CHAMFERING



Chamfering the external edge of the pipe will avoid damages to the seal and inner edge. This will eliminate cutting residue and improve laminar air flow.
(ref. PPS CH)

ASSEMBLY



Unscrew the nut by several turns and then insert the pipe while rotating it slightly until the recommended depth is reached.

LUBRICANT



The use of an assembly fluid (ref. PPS AL) is recommended to facilitate the assembly.

MARKING




Mark the tube to indicate the insertion depth in the fitting (use the reference marks on the fittings or on the wrench).


PPS SYSTEM

100% ALUMINUM NETWORK


PPS - ALUMINUM BLUE PIPE FOR COMPRESSED AIR

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Pipe OD (in)	Length (ft)	Part Numbers
		0.051	-	-	-	-	1/2"	13.12	PPS BTU1640
		0.051	-	-	-	-	3/4"	19.70	PPS TUB20L6
		0.055	-	-	-	-	1"	19.70	PPS TUB25L6
		0.059	-	-	-	-	1 1/4"	19.70	PPS TUB32L6
		0.071	-	-	-	-	1 1/2"	19.70	PPS TUB40L6
		0.079	-	-	-	-	2"	19.70	PPS TUB50L6
		0.079	-	-	-	-	2 1/2"	19.70	PPS TUB63L6
		0.094	-	-	-	-	3"	19.70	PPS TUB80L6


PPS - ALUMINUM GREY PIPE FOR VACUUM

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Pipe OD (in)	Length (ft)	Part Numbers
		0.051	-	-	-	-	1/2"	13.12	PPS GTU1640
		0.051	-	-	-	-	3/4"	19.70	PPS TUG20L6
		0.055	-	-	-	-	1"	19.70	PPS TUG25L6
		0.059	-	-	-	-	1 1/4"	19.70	PPS TUG32L6
		0.071	-	-	-	-	1 1/2"	19.70	PPS TUG40L6
		0.079	-	-	-	-	2"	19.70	PPS TUG50L6
		0.079	-	-	-	-	2 1/2"	19.70	PPS TUG63L6
		0.094	-	-	-	-	3"	19.70	PPS TUG80L6

PPS - ALUMINUM GREEN PIPE FOR NITROGEN

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Pipe OD (in)	Length (ft)	Part Numbers
		0.051	-	-	-	-	3/4"	19.70	PPS TUV20L6
		0.055	-	-	-	-	1"	19.70	PPS TUV25L6

PPS - ALUMINUM BENT LINK PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Pipe OD (in)	Part Numbers
		3.386	18.898	0.63	-	-	1/2"	PPS LMCB16
		3.543	19.173	0.787	-	-	3/4"	PPS LMCB20
		3.74	19.173	0.984	-	-	1"	PPS LMCB25

Technology
PPS Grip
Concept

Operating
pressure
0 to 232 psi

Vacuum
capability
0.59 inHg
(vacuum 98%)


Temperature
-4°F to +176°F

Construction
Pipe and fittings:
aluminum


Highlight
Scalable system

Meets
standards
ASME B31.3
REACH


PPS1 UN - ALUMINUM UNION FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	2.52	-	-	-	1/2"	PPS1 UN16
		1.496	3.071	-	-	-	3/4"	PPS1 UN20
		1.811	3.543	-	-	-	1"	PPS1 UN25
		2.244	4.173	-	-	-	1 1/4"	PPS1 UN32
		2.677	4.921	-	-	-	1 1/2"	PPS1 UN40
		3.307	5.984	-	-	-	2"	PPS1 UN50
		3.937	6.811	-	-	-	2 1/2"	PPS1 UN63
		4.764	8.071	-	-	-	3"	PPS1 UN80


PPS1 UNS - ALUMINUM FEMALE SLIDING UNION FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.811	3.543	-	-	-	1"	PPS1 UNS25
		2.244	4.173	-	-	-	1 1/4"	PPS1 UNS32
		2.677	4.921	-	-	-	1 1/2"	PPS1 UNS40
		3.307	5.984	-	-	-	2"	PPS1 UNS50
		3.937	6.811	-	-	-	2 1/2"	PPS1 UNS63
		4.764	8.071	-	-	-	3"	PPS1 UNS80

PPS1 MR - ALUMINUM PIPE REDUCING FITTING

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	For pipe OD (in)	Part Numbers
		1.811	3.346	1.496	-	-	1"	3/4"	PPS1 MR2520
		2.244	4.016	1.811	-	-	1 1/4"	1"	PPS1 MR3225
		2.677	4.803	2.244	-	-	1 1/2"	1 1/4"	PPS1 MR4032
		3.307	5.591	2.677	-	-	2"	1 1/2"	PPS1 MR5040
		3.937	6.693	3.307	-	-	2 1/2"	2"	PPS1 MR6350
		4.764	7.638	3.937	-	-	3"	2 1/2"	PPS1 MR8063


PPS1 9C - 90° ALUMINUM UNION ELBOW FITTING FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	2.441	-	-	-	1/2"	PPS1 9C16
		1.496	2.874	-	-	-	3/4"	PPS1 9C20
		1.811	3.504	-	-	-	1"	PPS1 9C25
		2.244	4.173	-	-	-	1 1/4"	PPS1 9C32
		2.677	5.315	-	-	-	1 1/2"	PPS1 9C40
		3.307	5.945	-	-	-	2"	PPS1 9C50
		3.937	7.087	-	-	-	2 1/2"	PPS1 9C63
		4.764	8.583	-	-	-	3"	PPS1 9C80


PPS SYSTEM

100% ALUMINUM NETWORK


PPS1 9CM - 90° ALUMINUM MALE THREAD ELBOW FITTING FOR PIPE

		A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	For pipe OD (in)	NPT male thread	Part Numbers
		1.26	2.362	1.969	1.024	-	1/2"	3/8" MNPT	PPS1 9CM16252
		1.26	2.362	2.165	1.024	-	1/2"	1/2" MNPT	PPS1 9CM16253
		1.496	2.835	2.402	1.26	-	3/4"	1/2" MNPT	PPS1 9CM20253
		1.811	3.425	2.795	1.496	-	1"	1/2" MNPT	PPS1 9CM25253
		1.811	3.425	2.835	1.496	-	1"	3/4" MNPT	PPS1 9CM25254
		2.244	4.055	3.465	1.811	-	1 1/4"	1" MNPT	PPS1 9CM32255
		2.677	4.843	4.173	2.244	-	1 1/2"	1 1/4" MNPT	PPS1 9CM40256
		2.677	4.843	4.173	2.244	-	1 1/2"	1 1/2" MNPT	PPS1 9CM40257

PPS1 4C - 45° ALUMINUM EQUAL FEMALE ELBOW FITTING FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	2.756	1.969	-	-	1/2"	PPS1 4C16
		1.496	3.268	2.323	-	-	3/4"	PPS1 4C20
		1.811	3.858	2.756	-	-	1"	PPS1 4C25
		2.244	4.606	3.346	-	-	1 1/4"	PPS1 4C32
		2.677	5.512	4.016	-	-	1 1/2"	PPS1 4C40

PPS1 BO - ALUMINUM PIPE CAP

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	1.772	-	-	-	1/2"	PPS1 B016
		1.496	2.087	-	-	-	3/4"	PPS1 B020
		1.811	2.402	-	-	-	1"	PPS1 B025
		2.244	2.756	-	-	-	1 1/4"	PPS1 B032
		2.677	3.346	-	-	-	1 1/2"	PPS1 B040
		3.307	3.976	-	-	-	2"	PPS1 B050
		3.937	4.882	-	-	-	2 1/2"	PPS1 B063
		4.764	5.748	-	-	-	3"	PPS1 B080

Technology
PPS Grip
Concept

Operating
pressure
0 to 232 psi

Vacuum
capability
0.59 inHg
(vacuum 98%)


Temperature
-4°F to +176°F

Construction
Pipe and fittings:
aluminum


Highlight
Scalable system

Meets
standards
ASME B31.3
REACH


PPS1 TE - ALUMINUM EQUAL FEMALE TEE FITTING FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	3.543	2.441	-	-	1/2"	PPS1 TE16
		1.496	4.252	2.874	-	-	3/4"	PPS1 TE20
		1.811	5.157	3.504	-	-	1"	PPS1 TE25
		2.244	6.102	4.173	-	-	1 1/4"	PPS1 TE32
		2.677	7.205	5.315	-	-	1 1/2"	PPS1 TE40
		3.307	8.622	5.945	-	-	2"	PPS1 TE50
		3.937	10.276	7.087	-	-	2 1/2"	PPS1 TE63
		4.764	12.402	8.583	-	-	3"	PPS1 TE80

PPS1 TR - ALUMINUM REDUCING BRANCH TEE FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	For pipe OD (in)	Part Numbers
		1.496	4.252	2.598	1.26	-	3/4"	1/2"	PPS1 TR2016
		1.811	5.157	3.071	1.26	-	1"	1/2"	PPS1 TR2516
		1.811	5.157	3.268	1.496	-	1"	3/4"	PPS1 TR2520
		2.244	6.102	3.583	1.26	-	1 1/4"	1/2"	PPS1 TR3216
		2.244	6.102	3.78	1.496	-	1 1/4"	3/4"	PPS1 TR3220
		2.244	6.102	4.016	1.811	-	1 1/4"	1"	PPS1 TR3225


PPS1 TT - ALUMINUM PARALLEL FEMALE THREAD TEE FITTING FOR PIPE

		A (inch)	B (inch)	C (inch)	D (mm)	E (inch)	For pipe OD (in)	NPT female thread	Part Numbers
		1.26	3.543	1.575	26	-	1/2"	3/8" FNPT	PPS1 TT16202
		1.496	4.252	1.85	32	-	3/4"	1/2" FNPT	PPS1 TT20203
		1.811	5.157	2.205	38	-	1"	1/2" FNPT	PPS1 TT25203
		1.811	5.157	2.205	38	-	1"	3/4" FNPT	PPS1 TT25204
		2.244	6.102	2.677	46	-	1 1/4"	3/4" FNPT	PPS1 TT32204
		2.244	6.102	2.677	46	-	1 1/4"	1" FNPT	PPS1 TT32205
		2.677	7.205	3.346	57	-	1 1/2"	3/4" FNPT	PPS1 TT40204
		2.677	7.205	3.346	57	-	1 1/2"	1" FNPT	PPS1 TT40205
		2.677	7.205	3.346	57	-	1 1/2"	1 1/4" FNPT	PPS1 TT40206
		3.307	8.622	3.976	72	-	2"	1" FNPT	PPS1 TT50205
		3.307	8.622	3.976	72	-	2"	1 1/4" FNPT	PPS1 TT50206
		3.307	8.622	3.976	72	-	2"	1 1/2" FNPT	PPS1 TT50207
		3.937	10.276	5.079	90	-	2 1/2"	1" FNPT	PPS1 TT63205
		3.937	10.276	5.079	90	-	2 1/2"	1 1/4" FNPT	PPS1 TT63206
		3.937	10.276	5.079	90	-	2 1/2"	1 1/2" FNPT	PPS1 TT63207
		3.937	10.276	5.079	90	-	2 1/2"	2" FNPT	PPS1 TT63208
		4.764	12.402	6.102	110	-	3"	1" FNPT	PPS1 TT80205
		4.764	12.402	6.102	110	-	3"	1 1/2" FNPT	PPS1 TT80207
		4.764	12.402	6.102	110	-	3"	2" FNPT	PPS1 TT80208
		4.764	12.402	6.102	110	-	3"	2 1/2" FNPT	PPS1 TT80209

PPS SYSTEM


100% ALUMINUM NETWORK

PPS1 MM - ALUMINUM TAPERED MALE THREAD STRAIGHT FITTING FOR PIPE



A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	For pipe OD (in)	NPT male thread	Part Numbers
1.26	2.047	26	-	-	1/2"	3/8" MNPT	PPS1 MM16252
1.26	2.283	26	-	-	1/2"	1/2" MNPT	PPS1 MM16253
1.496	2.559	32	-	-	3/4"	1/2" MNPT	PPS1 MM20253
1.496	2.638	32	-	-	3/4"	3/4" MNPT	PPS1 MM20254
1.811	2.874	38	-	-	1"	1/2" MNPT	PPS1 MM25253
1.811	2.913	38	-	-	1"	3/4" MNPT	PPS1 MM25254
1.811	3.071	38	-	-	1"	1" MNPT	PPS1 MM25255
2.244	3.465	46	-	-	1 1/4"	1" MNPT	PPS1 MM32255
2.244	3.504	46	-	-	1 1/4"	1 1/4" MNPT	PPS1 MM32256
2.677	4.173	57	-	-	1 1/2"	1 1/4" MNPT	PPS1 MM40256
2.677	4.173	57	-	-	1 1/2"	1 1/2" MNPT	PPS1 MM40257
3.307	4.724	72	-	-	2"	1 1/2" MNPT	PPS1 MM50257
3.307	4.882	72	-	-	2"	2" MNPT	PPS1 MM50258
3.937	5.748	90	-	-	2 1/2"	2" MNPT	PPS1 MM63258
3.937	5.984	90	-	-	2 1/2"	2 1/2" MNPT	PPS1 MM63259
4.764	6.811	110	-	-	3"	2 1/2" MNPT	PPS1 MM80259
4.764	6.89	110	-	-	3"	3" MNPT	PPS1 MM802510

PPS1 MF - ALUMINUM FEMALE THREAD STRAIGHT FITTING FOR PIPE



A (inch)	B (inch)	C (mm)	D (inch)	E (inch)	For pipe OD (in)	NPT female thread	Part Numbers
1.26	2.087	26	-	-	1/2"	3/8" FNPT	PPS1 MF16202
1.26	2.087	26	-	-	1/2"	1/2" FNPT	PPS1 MF16203
1.496	2.48	32	-	-	3/4"	1/2" FNPT	PPS1 MF20203
1.496	2.48	32	-	-	3/4"	3/4" FNPT	PPS1 MF20204
1.811	2.835	38	-	-	1"	1/2" FNPT	PPS1 MF25203
1.811	2.835	38	-	-	1"	3/4" FNPT	PPS1 MF25204
1.811	2.835	38	-	-	1"	1" FNPT	PPS1 MF25205
2.244	3.268	46	-	-	1 1/4"	1" FNPT	PPS1 MF32205
2.244	3.268	46	-	-	1 1/4"	1 1/4" FNPT	PPS1 MF32206
2.677	3.858	57	-	-	1 1/2"	1 1/4" FNPT	PPS1 MF40206
2.677	4.055	57	-	-	1 1/2"	1 1/2" FNPT	PPS1 MF40207
3.307	4.331	72	-	-	2"	1 1/2" FNPT	PPS1 MF50207
3.307	4.528	72	-	-	2"	2" FNPT	PPS1 MF50208
3.937	5.394	90	-	-	2 1/2"	2" FNPT	PPS1 MF63208
3.937	5.591	90	-	-	2 1/2"	2 1/2" FNPT	PPS1 MF63209
4.764	6.457	110	-	-	3"	2 1/2" FNPT	PPS1 MF80209
4.764	6.457	110	-	-	3"	3" FNPT	PPS1 MF802010

Technology
PPS Grip
Concept

Operating
pressure
0 to 232 psi

Vacuum
capability
0.59 inHg
(vacuum 98%)


Temperature
-4°F to +176°F

Construction
Pipe and fittings:
aluminum


Highlight
Scalable system

Meets
standards
ASME B31.3
REACH

PPS1 BP - ALUMINUM TAPPING FLANGE FOR PIPE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	For pipe OD (in)	Part Numbers
 		1.26	3.701	2.756	-	-	1"	1/2"	PPS1 BP2516
		1.496	3.858	2.835	-	-	1"	3/4"	PPS1 BP2520
		1.26	3.701	2.756	-	-	1 1/4"	1/2"	PPS1 BP3216
		1.496	3.858	2.835	-	-	1 1/4"	3/4"	PPS1 BP3220
		1.26	4.803	4.016	-	-	1 1/2"	1/2"	PPS1 BP4016
		1.496	5	4.016	-	-	1 1/2"	3/4"	PPS1 BP4020
		1.811	5.118	4.055	-	-	1 1/2"	1"	PPS1 BP4025
		1.26	4.803	4.016	-	-	2"	1/2"	PPS1 BP5016
		1.496	5	4.016	-	-	2"	3/4"	PPS1 BP5020
		1.811	5.118	4.055	-	-	2"	1"	PPS1 BP5025
		1.496	6.417	5.787	-	-	2 1/2"	3/4"	PPS1 BP6320
		1.811	6.575	5.787	-	-	2 1/2"	1"	PPS1 BP6325
		2.244	6.496	5.787	-	-	2 1/2"	1 1/4"	PPS1 BP6332
		1.496	6.417	5.787	-	-	3"	3/4"	PPS1 BP8020
		1.811	6.575	5.787	-	-	3"	1"	PPS1 BP8025
		2.244	6.496	5.787	-	-	3"	1 1/4"	PPS1 BP8032


PPS1 BT - ALUMINUM THREAD TAPPING FLANGE

		A (mm)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	NPT female thread	Part Numbers
 		32	3.228	2.756	-	-	1"	3/8" FNPT	PPS1 BT25202
		32	3.228	2.756	-	-	1"	1/2" FNPT	PPS1 BT25203
		44	4.331	4.016	-	-	1 1/2"	1/2" FNPT	PPS1 BT40203
		32	3.228	2.756	-	-	1 1/4"	1/2" FNPT	PPS1 BT32203
		44	4.331	4.016	-	-	1 1/2"	3/4" FNPT	PPS1 BT40204
		32	3.307	2.756	-	-	1 1/4"	3/4" FNPT	PPS1 BT32204
		44	4.331	4.016	-	-	1 1/2"	1" FNPT	PPS1 BT40205
		44	4.331	4.016	-	-	2"	1/2" FNPT	PPS1 BT50203
		44	4.331	4.016	-	-	2"	3/4" FNPT	PPS1 BT50204
		44	4.331	4.016	-	-	2"	1" FNPT	PPS1 BT50205
		57	6.339	5.787	-	-	2 1/2"	1/2" FNPT	PPS1 BT63203
		57	6.339	5.787	-	-	2 1/2"	3/4" FNPT	PPS1 BT63204
		57	6.378	5.787	-	-	2 1/2"	1" FNPT	PPS1 BT63205
		57	6.339	5.787	-	-	3"	1/2" FNPT	PPS1 BT80203
		57	6.339	5.787	-	-	3"	3/4" FNPT	PPS1 BT80204
		57	6.378	5.787	-	-	3"	1" FNPT	PPS1 BT80205


PPS SYSTEM

100% ALUMINUM NETWORK


PPS1 RSIF - PARALLEL FEMALE THREAD VALVES WITH FITTINGS FOR PIPE

		A (inch)	B (inch)	C (inch)	D (mm)	E (inch)	For pipe OD (in)	NPT female thread	Part Numbers
		1.26	4.764	2.52	25	-	1/2"	1/2" FNPT	PPS1 RSIF16203
		1.496	4.764	2.598	25	-	3/4"	1/2" FNPT	PPS1 RSIF20203
		1.811	4.921	2.953	31	-	1"	3/4" FNPT	PPS1 RSIF25204
		2.244	5.945	3.346	40	-	1 1/4"	1" FNPT	PPS1 RSIF32205
		2.677	6.181	3.902	25	-	1 1/2"	1 1/4" FNPT	PPS1 RSIF40206
		3.307	8.051	4.823	55	-	2"	1 1/2" FNPT	PPS1 RSIF50207
		3.937	9.252	10.945	-	-	2 1/2"	2" FNPT	PPS1 RSIF63208
		4.764	11.811	9.843	-	-	3"	2 1/2" FNPT	PPS1 RSIF80209

PPS1 RSIM - PARALLEL MALE THREAD VALVES WITH FITTINGS FOR PIPE

		A (inch)	B (inch)	C (inch)	D (mm)	E (inch)	For pipe OD (in)	NPT male thread	Part Numbers
		1.26	5.118	2.52	24	-	1/2"	1/2" MNPT	PPS1 RSIM16253
		1.496	5.118	2.598	24	-	3/4"	1/2" MNPT	PPS1 RSIM20253
		1.811	5.236	2.953	27	-	1"	3/4" MNPT	PPS1 RSIM25254
		2.244	6.299	3.346	36	-	1 1/4"	1" MNPT	PPS1 RSIM32255
		2.677	6.634	3.902	47	-	1 1/2"	1 1/4" MNPT	PPS1 RSIM40256
		3.307	8.465	4.823	50	-	2"	1 1/2" MNPT	PPS1 RSIM50257

PPS1 RSI - PIPING VALVE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		1.26	5.512	2.52	-	-	1/2"	PPS1 RSI16
		1.496	5.787	2.598	-	-	3/4"	PPS1 RSI20
		1.811	6.181	2.953	-	-	1"	PPS1 RSI25
		2.244	7.441	3.346	-	-	1 1/4"	PPS1 RSI32
		2.677	7.953	3.902	-	-	1 1/2"	PPS1 RSI40
		3.307	9.213	4.823	-	-	2"	PPS1 RSI50
		3.937	12.598	10.827	-	-	2 1/2"	PPS1 RSI63
		4.764	15.512	9.843	-	-	3"	PPS1 RSI80

Technology
PPS Grip
Concept

Operating
pressure
0 to 232 psi

Vacuum
capability
0.59 inHg
(vacuum 98%)


Temperature
-4°F to +176°F

Construction
Pipe and fittings:
aluminum


Highlight
Scalable system

Meets
standards
ASME B31.3
REACH

PPS1 UF - FLANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For pipe OD (in)	Part Numbers
		6.417	4.921	0.63	0.748	4.835	2 1/2"	PPS1 UF63
		7.205	5.394	0.63	0.748	5.604	3"	PPS1 UF80
		Compliant with DIN EN1092 and ANSI EN1759 Standards						

PPS1 DK - DILATATION KIT

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For tube OD (in)	Part Numbers
		6.496	14.961	-	-	-	2 1/2"	PPS1 DK63
		7.283	15.748	-	-	-	3"	PPS1 DK80

PPS1 LK - LOCK KIT FOR VALVE

	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For valve Ø (in)	Part Numbers
	-	-	-	-	-	(1) 1/2" to 1"	PPS1 LK1625
	-	-	-	-	-	(1) 1 1/4" to 1 1/2"	PPS1 LK3240
	-	-	-	-	-	(1) 2"	PPS1 LK50
	-	-	-	-	-	(2) 2 1/2" to 3"	PPS1 LK6380

PPS1 NUT - ALUMINUM NUT

	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting Ø (in)	Part Numbers
	-	-	-	-	-	1/2"	PPS1 NUT16
	-	-	-	-	-	3/4"	PPS1 NUT20
	-	-	-	-	-	1"	PPS1 NUT25
	-	-	-	-	-	1 1/4"	PPS1 NUT32
	-	-	-	-	-	1 1/2"	PPS1 NUT40
	-	-	-	-	-	2"	PPS1 NUT50
	-	-	-	-	-	2 1/2"	PPS1 NUT63
	-	-	-	-	-	3"	PPS1 NUT80

PPS SYSTEM

100% ALUMINUM NETWORK

Technology
PPS Grip
Concept

Operating
pressure
0 to 232 psi

Vacuum
capability
0.59 inHg
(vacuum 98%)

Temperature
-4°F to +176°F

Construction
Pipe and fittings:
aluminum

Highlight
Scalable system

Meets
standards
ASME B31.3
REACH

PPS1 SEAL - INTERNAL SEAL



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting Ø (in)	Part Numbers
-	-	-	-	-	1/2"	PPS1 SEAL16
-	-	-	-	-	3/4"	PPS1 SEAL20
-	-	-	-	-	1"	PPS1 SEAL25
-	-	-	-	-	1 1/4"	PPS1 SEAL32
-	-	-	-	-	1 1/2"	PPS1 SEAL40
-	-	-	-	-	2"	PPS1 SEAL50
-	-	-	-	-	2 1/2"	PPS1 SEAL63
-	-	-	-	-	3"	PPS1 SEAL80

PPS1 IP - INTERNAL PARTS KIT



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting Ø (in)	Part Numbers
-	-	-	-	-	1/2"	PPS1 IP16
-	-	-	-	-	3/4"	PPS1 IP20
-	-	-	-	-	1"	PPS1 IP25
-	-	-	-	-	1 1/4"	PPS1 IP32
-	-	-	-	-	1 1/2"	PPS1 IP40
-	-	-	-	-	2"	PPS1 IP50
-	-	-	-	-	2 1/2"	PPS1 IP63
-	-	-	-	-	3"	PPS1 IP80

PPS1 BA - BAND KIT



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	For fitting Ø (in)	Part Numbers
-	-	-	-	-	1/2"	PPS1 BA16
-	-	-	-	-	3/4"	PPS1 BA20
-	-	-	-	-	1"	PPS1 BA25
-	-	-	-	-	1 1/4"	PPS1 BA32
-	-	-	-	-	1 1/2"	PPS1 BA40
-	-	-	-	-	2"	PPS1 BA50
-	-	-	-	-	2 1/2"	PPS1 BA63
-	-	-	-	-	3"	PPS1 BA80

(unit of sales = 10 band)

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

PPS1 CLE - SPANNER WRENCH



A (inch)	B (inch)	C (inch)	D (inch)	For fitting Ø (in)	Part Numbers
-	-	-	-	1/2"	PPS1 CLE16
-	-	-	-	3/4"	PPS1 CLE20
-	-	-	-	1"	PPS1 CLE25
-	-	-	-	1 1/4"	PPS1 CLE32
-	-	-	-	1 1/2"	PPS1 CLE40
-	-	-	-	2"	PPS1 CLE50
-	-	-	-	2 1/2"	PPS1 CLE63
-	-	-	-	3"	PPS1 CLE80

PPS CLESTD - NEUTRAL HOOK SPANNER



A (inch)	B (inch)	C (inch)	D (inch)	For fitting Ø (in)	Part Numbers
-	-	-	-	1/2" to 3"	PPS CLESTD

Wrench used to hold the body while tightening

PPS SP - DRILL BIT FOR TAPING FLANGE



A (inch)	B (inch)	C (inch)	D (inch)	Drill Ø (in)	For pipe OD (in)	Part Numbers
-	-	-	-	0.63"	1/2" to 1 1/4"	PPS SP16
-	-	-	-	0.87"	1 1/2" to 2"	PPS SP22
-	-	-	-	1.18"	2 1/2" to 3"	PPS SP30

Bores through pipe to install for PPS1 BT and PPS1 BP tapping flanges

PPS CHE - PIPE CHAMFERING AND DEBURRING TOOLS



A (inch)	B (inch)	C (inch)	D (inch)	For tube OD (in)	Function	Part Numbers
-	-	-	-	(1) 1/2" to 2"	-	PPS CH50
-	-	-	-	(2) 1/2" to 2"	-	PPS CHP50
-	-	-	-	-	(3) Deburring inside / outside	PPS CHERAP
-	-	-	-	(4) 2 1/2" to 3"	-	PPS CH110

PPS AL - LIQUID FOR ASSEMBLY



A (inch)	B (inch)	C (inch)	D (inch)	Capacity (fl Oz)	Part Numbers
-	-	-	-	22	PPS AL

Lubricates pipe to facilitate insertion into the fittings


ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

PPS CTU - PIPE CUTTER




A (inch)	B (inch)	C (inch)	D (inch)	For pipe OD (in)	Part Numbers
-	-	-	-	1/2" to 2 1/2"	PPS CTU63
-	-	-	-	2 1/2" to 3"	PPS CTU110

PPS1 CI - PIPING CLAMP




A (inch)	B (inch)	C (inch)	D (inch)	For pipe OD (in)	Thread	Part Numbers
0.945	1.85	-	-	1/2"	M8	PPS1 CI16
0.945	1.929	-	-	3/4"	M8	PPS1 CI20
1.142	2.087	-	-	1"	M8	PPS1 CI25
1.496	2.244	-	-	1 1/4"	M8	PPS1 CI32
1.929	3.917	-	-	1 1/2"	M8	PPS1 CI40
2.323	4.114	-	-	2"	M8	PPS1 CI50
2.953	5.315	-	-	2 1/2"	M8	PPS1 CI63
3.543	5.709	-	-	3"	M8	PPS1 CI80

PPS1 CI UNC - PIPING CLAMP (UNIT OF SALES = 1 BOX OF 5 CLAMPS)



A (inch)	B (inch)	C (inch)	D (inch)	For pipe OD (in)	UNC female thread	Part Numbers
0.945	1.85	-	-	1/2"	3/8	PPS1 CI16UNC
0.945	1.929	-	-	3/4"	3/8	PPS1 CI20UNC
1.142	2.087	-	-	1"	3/8	PPS1 CI25UNC
1.496	2.244	-	-	1 1/4"	3/8	PPS1 CI32UNC
1.929	3.917	-	-	1 1/2"	3/8	PPS1 CI40UNC
2.323	4.114	-	-	2"	3/8	PPS1 CI50UNC
2.953	5.315	-	-	2 1/2"	3/8	PPS1 CI63UNC
3.543	5.709	-	-	3"	3/8	PPS1 CI80UNC

PPS1 CIS - SPACER FOR PIPING CLAMP

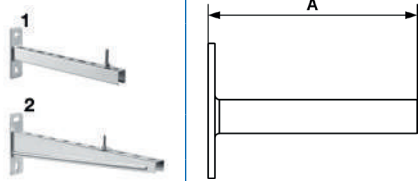


A (inch)	B (inch)	C (inch)	D (inch)	Length (in)	Part Numbers
1.811	0.984	1.516	1.378	(1) 1.38	PPS1 CIS1632
2.382	1.378	0.984	0.787	(2) 0.79	PPS1 CIS4050

PPS1 CIRSI - BRACKET FOR VALVE

	A (inch)	B (inch)	C (inch)	D (inch)	For pipe OD (in)	Part Numbers
	-	-	-	-	1/2"	PPS1 CIRSI16
	-	-	-	-	3/4"	PPS1 CIRSI20
	-	-	-	-	1"	PPS1 CIRSI25
	-	-	-	-	1 1/4"	PPS1 CIRSI32
	-	-	-	-	1 1/2"	PPS1 CIRSI40
	-	-	-	-	2"	PPS1 CIRSI50
	-	-	-	-	2 1/2"	PPS1 CIRSI63
	-	-	-	-	3"	PPS1 CIRSI80

METAL SUPPORT BRACKET

	A (inch)	B (inch)	C (inch)	D (inch)	Length (in)	Max load distributed over the entire length (lb)	Part Numbers
	7.087	-	-	-	(1) 7.09	293.2	CS 180L
	11.811	-	-	-	(1) 11.81	176.4	CS 310L
	16.535	-	-	-	(1) 16.54	124.3	CS 420L
	20.079	-	-	-	(2) 20.08	165.3	CS 500

SCREW FOR METAL SUPPORT


	A (inch)	B (inch)	C (inch)	D (inch)	Length (in)	Metric thread	Part Numbers
	-	-	-	-	0.79	M8	CS VIS1
	-	-	-	-	1.57	M8	CS VIS2

M8 BEAM CLIP

	A (inch)	B (inch)	C (inch)	D (inch)	Panel thickness (in)	Metric thread	Part Numbers
	1.85	1.772	-	-	(1) .11" to .31"		CP 38
	2.087	1.772	-	-	(1) .31" to .55"		CP 814
	2.283	1.772	-	-	(1) .55" to .78"		CP 1420
	1.181	1.339	-	-	(2) up to .63" max.	M6 or cross-piece	CP 016
	1.378	1.378	-	-	(3) .04" to .31"	M8	CP M8

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

GALVANIZED STUD M8

		A (inch)	B (inch)	C (inch)	D (inch)	Length (in)	Metric thread	Part Numbers
		1.969	-	-	-	1.97"	M8	PV 80
		3.15	-	-	-	3.15"	M8	PV 880
		-	-	-	-		M8 male x 3/8"UNC Female adapter	TA M8FU


SUSPENSION SYSTEM FOR PIPING CLAMP

	A (inch)	B (inch)	C (inch)	D (inch)	Length (ft)	Metric thread	Part Numbers
	-	-	-	-	5'	3/8 UNC	SK SC5T
	-	-	-	-	10'	3/8 UNC	SK SC10T

SCREW Ø 6 MM

		A (inch)	B (inch)	C (inch)	D (inch)	Length (in)	Part Numbers
		2.362	-	-	-	2.36"	TVB 660
		3.543	-	-	-	3.54"	TVB 690

M8 MALE STRUT

		A (inch)	B (inch)	C (inch)	D (inch)	Metric thread	Part Numbers
		3.031	-	-	-	M8	TL M8

M8 UNION CONNECTOR

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Metric thread	Length (in)	Part Numbers
		39.37	-	-	-	Union Connector	M8	39"	TF M8100
		1.181	-	-	-	Union for M8 threaded stud	M8	-	TL RM8
		-	-	-	-	Lock Nut	M8		TE M8

PPS RANGE CASE

Applications
PPS ringmain
assembling

PPS CK - TIGHTENING WRENCHES CASE



Includes	Part Numbers
- 1 Tightening wrench 1/2": PPS1 CLE16 - 1 Tightening wrench 3/4": PPS1 CLE20 - 1 Tightening wrench 1": PPS1 CLE25 - 1 Tightening wrench 1 1/4": PPS1 CLE32 - 1 Marker pen: PPS PEN	PPS CK1632
- 1 Tightening wrench 1 1/2": PPS1 CLE40 - 1 Tightening wrench 2": PPS1 CLE50 - 1 Marker pen: PPS PEN	PPS CK4050
- 1 Tightening wrench 2 1/2": PPS1 CLE63 - 1 Tightening wrench 3": PPS1 CLE80 - 1 Marker pen: PPS1 PEN	PPS CK6380

PPS CT - TOOLS CASE FOR PIPES PREPARATION



Includes	Part Numbers
- 1 Tube cutter for Ø ext. 1/2" to 2 1/2" : PPS CTU63 - 1 Chamfering tool for tube Ø ext. 1/2" to 2" : PPS CH50 - 1 Deburring int/ext: PPS CHERAP - 1 Bit for drilling tube 1/2" to 1 1/4": PPS SP16 - 1 Bit for drilling tube 1 1/2" to 2": PPS SP22 - 1 Marker pen: PPS PEN	PPS CT1650

FLEXIBLE LINK HOSES


FLEXIBLE LINK - SWIVEL MALE - MALE




NPT male thread	Length (ft)	Bend radius at 68° F (at 20°C) (mm)	Max operating pressure (psi)	Temperature (°F)	Part Numbers
1/2" MNPT	4.9'	7.1	2320	-40 to +230	LEM 253
3/4" MNPT	4.9'	9.4	1530	-40 to +230	LEM 254
1" MNPT	4.9'	11.8	1280	-40 to +230	LEM 255
1 1/4" MNPT	7.2'	16.5	920	-40 to +230	LEM 256
1 1/2" MNPT	8.2'	19.7	730	-40 to +230	LEM 257
2" MNPT	6.5'	24.8	1160	-40 to +230	LEM 258

SINGLE WALL MANIFOLDS


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.736	0.256	1/2" FNPT	ISI 06	ISI 061203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ISI 08	ISI 081203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ISI 11	ISI 111203WK


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F


Construction
Aluminum alloy

Equipped with
Manual drain


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet PT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 06	USI 061203WK


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 08	USI 081203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	USI 11	USI 111203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ESI 07	ESI 071203WK

SINGLE WALL MANIFOLDS


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F


Construction
Aluminum alloy

Equipped with
Manual drain


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/2" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ESI 11	ESI 111203WK


FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	ASI 06	ASI 061203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	CSI 06	CSI 061203WK

FEMALE THREAD SINGLE WALL MANIFOLD - 1 COUPLER AND DRAIN - 3/8" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 1 coupling	Part Numbers
		2.008	1.969	1.496	2.48	0.256	1/2" FNPT	CSI 08	CSI 081203WK

DOUBLE WALL MANIFOLDS


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F


Construction
Aluminum alloy

Equipped with
Manual drain


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ISI 06	ISI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 06	ISI 068204WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ISI 08	ISI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 08	ISI 088204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" INDUSTRIAL INTERCHANGE


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 11	ISI 118204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" AND 1/4" INDUSTRIAL INTERCHANGE


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	1.575	0.256	3/4" FNPT	ISI 08 ISI 06	ISI 088204WK16

DOUBLE WALL MANIFOLDS


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" AND 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 11 ISI 06	ISI 118204WKI6


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 1/4" INDUSTRIAL INTERCHANGE AND 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 06 ESI 07	ISI 068204WKE7

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 1/4" INDUSTRIAL AND 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 06 ASI 06	ISI 068204WKA6

FEMALE THREAD DOUBLE PORT WALL BRACKET - 2 COUPLERS AND DRAIN 1/4" INDUSTRIAL INTERCHANGE AND 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ISI 06 CSI 06	ISI 068204WKC6


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F


Construction
Aluminum alloy

Equipped with
Manual drain


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	USI 06	USI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 06	USI 068204WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	USI 08	USI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 08	USI 088204WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" AUTOMOTIVE INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 11	USI 118204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 3/8" AND 1/4" AUTOMOTIVE INTERCHANGE


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 08 USI 06	USI 088204WKU6

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 1/2" AND 1/4" AUTOMOTIVE INTERCHANGE


		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 11 USI 06	USI 118204WKU6

DOUBLE WALL MANIFOLDS


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 1/4" AUTOMOTIVE INTERCHANGE AND 1/4" INDUSTRIAL INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	USI 06 ISI 06	USI 068204WKI6


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ESI 07	ESI 078203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 07	ESI 078204WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/2" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 11	ESI 118204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" AND 1/2" HIGH FLOW INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 11 ESI 07	ESI 118204WKE7

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN 3/8" HIGH FLOW INTERCHANGE AND 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ESI 07 ASI 06	ESI 078204WKA6


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F


Construction
Aluminum alloy

Equipped with
Manual drain


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" ARO 210 INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	ASI 06	ASI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	ASI 06	ASI 068204WK


FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	CSI 06	CSI 068203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	CSI 06	CSI 068204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLERS AND DRAIN - 3/8" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	1/2" FNPT	CSI 08	CSI 088203WK
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	CSI 08	CSI 088204WK

FEMALE THREAD DOUBLE WALL MANIFOLD - 2 COUPLINGS AND DRAIN - 3/8" AND 1/4" ISO 6150 C INTERCHANGE

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet 2 couplings	Part Numbers
		2.795	2.244	1.496	2.756	0.256	3/4" FNPT	CSI 06 CSI 08	CSI 088204WKC6

MULTI PORT WALL BRACKETS


Operating
pressure
29 to 174 psi

Temperature
+5°F to +158°F

Construction
Aluminum

NEW


FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" INDUSTRIAL INTERCHANGE



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ISI 06	MF 204S4IS
3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ISI 06	MF 204S6IS
3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ISI 06	MF 204S8IS
3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x ISI 06	MF 204S10IS

NEW


FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" AUTOMOTIVE INTERCHANGE



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x USI 06	MF 204S4US
3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x USI 06	MF 204S6US
3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x USI 06	MF 204S8US
3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x USI 06	MF 204S10US

NEW


FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 3/8" HIGH FLOW INTERCHANGE



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ESI 07	MF 204S4ES
3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ESI 07	MF 204S6ES
3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ESI 07	MF 204S8ES
3.071	8.465	2.48	8.465	0.256	3/4" FNPT	10 x ESI 07	MF 204S10ES

NEW


FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" ARO 210 INTERCHANGE



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x ASI 06	MF 204S4AS
3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x ASI 06	MF 204S6AS
3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x ASI 06	MF 204S8AS
3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x ASI 06	MF 204S10AS

NEW

FEMALE THREAD WALL MANIFOLD - COUPLERS AND DRAIN - 1/4" ISO 6150 C INTERCHANGE



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet	Part Numbers
3.071	5.315	2.48	3.15	0.256	3/4" FNPT	4 x CSI 06	MF 204S4CS
3.071	7.087	2.48	4.921	0.256	3/4" FNPT	6 x CSI 06	MF 204S6CS
3.071	8.858	2.48	6.693	0.256	3/4" FNPT	8 x CSI 06	MF 204S8CS
3.071	10.63	2.48	8.465	0.256	3/4" FNPT	10 x CSI 06	MF 204S10CS

WALL BRACKETS


Operating
pressure
0 to 232 psi

Temperature
-4°F to +176°F


Construction
Aluminum alloy

Equipped with
Manual drain

FEMALE THREAD SINGLE WALL BRACKET - OUTLET 1 COUPLER AND DRAIN

 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet NPT female thread	Part Numbers
	2.008	1.969	1.496	2.48	0.256	1/2" FNPT	1/2" FNPT	MF 203S1

FEMALE THREAD DOUBLE WALL BRACKET - OUTLET 2 COUPLERS AND DRAIN

 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Outlet NPT female thread	Part Numbers
	2.795	2.244	1.496	2.913	0.255	1/2" FNPT	1/2" FNPT	MF 203S2
	2.795	2.244	1.496	2.913	0.255	3/4" FNPT	1/2" FNPT	MF 204S2


WALL MOUNTED BRACKET WITHOUT COUPLINGS

Operating
pressure
0 to 232 psi

Temperature
-4°F to +176°F

Construction
Aluminum

NEW MANIFOLD

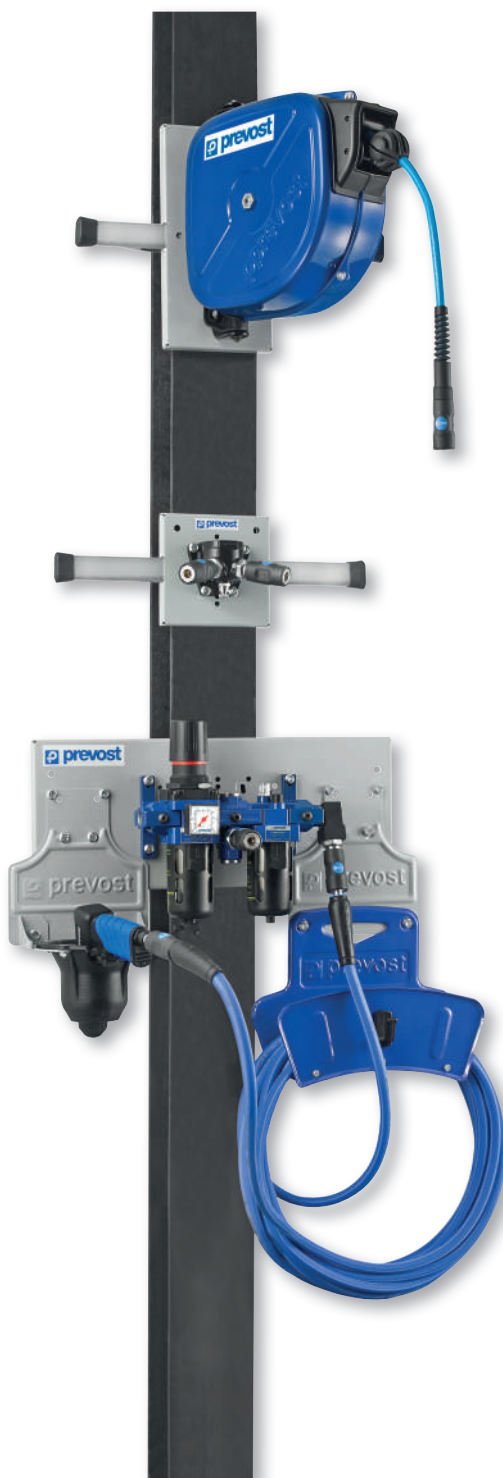
 	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Inlet NPT female thread	Number of outlets	Outlet NPT female thread	Part Numbers
	3.071	3.937	2.48	3.15	2.48	3/4" FNPT	4	1/2" FNPT	MF 204S4
	2.913	5.709	2.48	4.921	2.48	3/4" FNPT	6	1/2" FNPT	MF 204S6
	3.071	7.48	2.48	6.693	2.48	3/4" FNPT	8	1/2" FNPT	MF 204S8
	3.071	9.252	2.48	8.465	2.48	3/4" FNPT	10	1/2" FNPT	MF 204S10

Drill Ø: 0.256 in
For a fully functional drain order parts: A4 254201 and MA 14T

10

Mounting decks for network accessories

PREVOST metal mounting decks are an ideal solution for safe and ergonomic work station organization.



■ QUICK INSTALLATION AND TIME SAVINGS

The decks are quick and easy to install. Individual items may be pre-assembled on the deck prior to mounting in the final location to reduce on-site installation time.

■ MOUNTING SYSTEM WITHOUT DRILLING OR THE USE OF SPECIAL TOOLS

Attached using two or four steel anchors, ensuring compliance with building standards and mechanical properties.

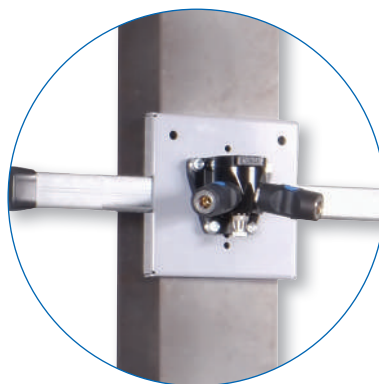
■ DECKS CAN BE EASILY REMOVED AND REPOSITIONED

All the screws and nuts necessary to mount PREVOST hose reels and accessories arrive with the kit.

■ EASY-TO-USE FOR DAY-TO-DAY OPERATIONS AND PRODUCTIVITY

Applications

Four pre-drilled deck configurations for a wide range of applications. Each deck can be customized to mount various PREVOST products.



■ PLA 2000 - PLA 450

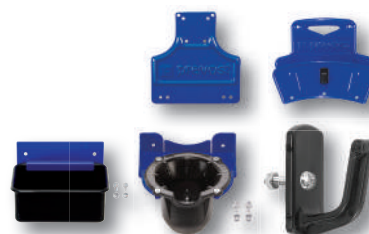
For open or closed-drum automatic hose reels, facilitating the compressed air supply to work station tools:

- Safety during use
- Ease of operation
- Work station efficiency



■ PLA 1000 - PLA 225

- **prevoS1** work station wall mounts, for quick and safe connection.
- **ALTO** air preparation assemblies which include: filter, regulator and lubricator to create a high efficiency system to run pneumatic tools and equipment.
- Multi-purpose decks for mounting the following accessories:
 - hose holder
 - blow gun holder
 - bolt holder
 - tool holder



Each deck is supplied with the anchors needed to mount it on a beam, and the fittings needed to mount the work equipment. The PLA 225 and PLA 450 decks are supplied with the rails needed to attach them to beams.

Maximum weight on PLA 2000 and PLA 1000: 220 lb

Maximum weight on PLA 225 and PLA 450: 88 lb


Mounting decks **for network accessories**

Assembly **guidelines**

■ ATTACHMENT ON BEAMS

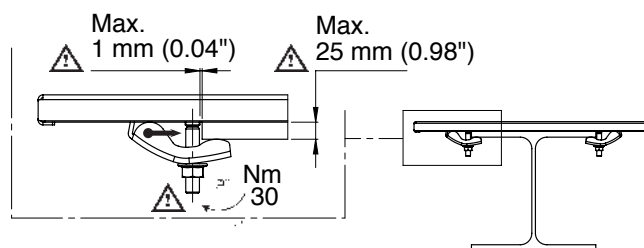
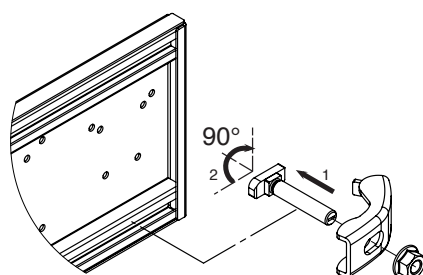
PREVOST decks are fastened to the structural metal beams of the building. Our fastening system using anchors is compatible with IPN and HEA beams with the following dimensions:

- Thickness "E" of beams: 0 to 25 mm (0" to 1") maximum
- Width "B" of beams: 100 to 340 mm (4" to 13") maximum



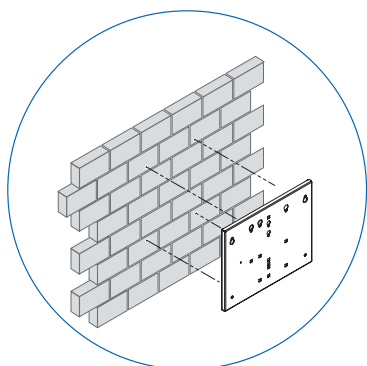
The plates are fastened to metal beams using two or four steel anchors.

- 1 - The anchor screws are positioned in the rails on the rear of the deck.
- 2 - The jaw of each deck is secured to the screw and then tightened to clamp onto the side of the metal beam.
- 3 - The deck is now firmly held in place.



■ DIRECT WALL MOUNTING

Conventional installation with screws and wall anchors.



MOUNTING DECKS FOR HEA (IPN) BEAM

Construction
Galvanized steel,
Polyester paint

Applications
Fastening system
for IPN/HEA
beams

Highlight
Workstation
ergonomics

MOUNTING DECK FOR HOSE REELS DMO - DGO - DVO - DGF - DSF - DPF - DRF - DMF

	Includes	Compatible with	Weight (max. lb)	Part Numbers
	 - 1 mounting deck PLA 2000N - 4 anchors - screws and nuts kit - 1 rubber bush	Mounting deck for fastening hose reels: DMO-DGO-DVO-DGF- DSF-DPF-DRF- DMF	220	PLA 2000

SMALL MOUNTING DECK FOR HOSE REELS DSF - DPF - DRF - DMF

	Includes	Compatible with	Weight (max. lb)	Part Numbers
	 - 1 mounting deck PLA 450N - 2 anchors - screws and nuts kit - 16 1/2" free track	Mounting deck for fastening hose reels: DSF - DMF - DRF - DPF	88	PLA 450

MOUNTING DECK FOR WALL BRACKETS PREVOS1, ALTO AIR TREATMENT UNITS, ACCESSORIES

	Includes	Compatible with	Weight (max. lb)	Part Numbers
	 - 1 mounting deck PLA 1000N - 4 anchors - 1 screws and nuts kit	Mounting deck for fastening: - prevoS1 wall brackets - ALTO air treatment units - Accessories	220	PLA 1000

SMALL MOUNTING DECK FOR PREVOS1, ALTO AIR TREATMENT UNIT, ACCESSORIES

	Includes	Compatible with	Weight (max. lb)	Part Numbers
	 - 1 mounting deck PLA 225N - 2 anchors - screws and nuts kit - 420 mm free track	Mounting deck for: - prevoS1 wall brackets - Air treatment units - Universal bracket	88	PLA 225

ASSOCIATED PRODUCTS

		
prevoS1 two parts wall brackets p 19	Enclosed hose reels DRF p 213	Filter regulator p 301


MOUNTING DECKS FOR DIRECT WALL FASTENING

Construction
Galvanized steel,
Polyester paint


Applications
Fastening system
for IPN/HEA
beams

Highlight
Workstation
ergonomics


NON-EQUIPPED MOUNTING DECK FOR HOSE REELS DMO - DGO - DVO - DGF - DSF - DPF - DRF - DMF

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Weight (max. lb)	Part Numbers
		19.685	15.748	16.535	11.496	Mounting deck for fastening hose reels: DMO - DGO - DVO - DGF - DSF - DPF - DRF - DMF	220	PLA 2000N


SMALL NON-EQUIPPED MOUNTING DECK FOR FASTENING: DSF - DPF - DRF - DMF HOSE REELS

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Weight (max. lb)	Part Numbers
		5.906	11.811	4.331	-	Mounting deck for fastening hose reels: DSF - DMF - DRF - DPF	88	PLA 450N

NON-EQUIPPED MOUNTING DECK FOR PREVOS1 WALL FITTINGS, ALTO AIR TREATMENT UNITS AND ACCESSORIES

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Weight (max. lb)	Part Numbers
		19.685	7.874	17.913	-	Mounting deck for fastening: - prevoS1 wall brackets - ALTO air treatment units - Accessories	220	PLA 1000N

SMALL NON-EQUIPPED MOUNTING DECK FOR PREVOS1 WALL FITTINGS, ALTO AIR TREATMENT UNITS OR ACCESSORIES

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Weight (max. lb)	Part Numbers
		5.906	5.906	4.331	-	Mounting deck for fastening: - prevoS1 wall brackets - Universal bracket - ALTO air treatment units	88	PLA 225N

MOUNTING DECK ACCESSORIES

Highlight
Workstation
ergonomics

UNIVERSAL BRACKET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		7.48	8.071	-	Universal bracket for: - bolt holder - hose holder - tool holder	PLA FIX

HOSE HOLDER

		A (inch)	B (inch)	C (inch)	Includes	Part Numbers
		11.496	8.976	5.906	Hose holder supplied with: - 1 hook for spray gun - 1 kit of screws and nuts - 2 rubber wedges	PLA HR

BOLT HOLDER

		A (inch)	B (inch)	C (inch)	Includes	Part Numbers
		8.071	5.236	5.906	Bolt holder supplied with: - 1 box - 1 bracket - 1 screws and nuts kit	PLA BB

TOOL HOLDER

		A (inch)	B (inch)	C (inch)	Includes	Part Numbers
		6.378	5.236	-	Tool holder kit: - 1 mounting bracket - 1 tool holder shell - 1 kit of screws and nuts	PLA TH

SUSPENSION HOOK

		A (inch)	B (inch)	C (inch)	Includes	Part Numbers
		-	-	-	Suspension hook supplied with M6×14 mm screws and M6 nuts	PLA K

SPARE PARTS FOR MOUNTING DECKS

Highlight
Workstation
ergonomics

GRATING FOR ANCHORING TO IPN/HEA BEAM



Includes	Part Numbers
Steel anchors system supplied with: - 1 anchor - 1 M10 screw - L = 50 mm - 1 M10 nut	PLA CR

KIT OF SCREWS AND NUTS FOR PANEL MOUNTING



Includes	Part Numbers
Kit comprising: - 4 M10×20 screws - 2 M10 nuts - 2 captive M10 nuts	PLA VEGM
Kit comprising: - 2 M8×20 mm screws - 1 M8 nut - 1 captive M8 nut	PLA VEPM
Kit comprising: - 12 M6×20 mm rectangular head screws - 12 M6 nuts for mounting an accessory, a wall fitting and an ALTO assembly	PLA VEAFF
Kit of screws and nuts: - 4 M6×20 mm screws - 4 M6 nuts	PLA VEFW

SIDE RAIL FOR MOUNTING SMALL PLATES ON IPN/HEA BEAMS



Description	Function	Part Numbers
420 mm side rail	Mounting PLA 450 and PLA 225 panels on HEA beams	PLA RA

WEDGE BLOCK



Includes	Part Numbers
Rubber block diam. 25 mm Supplied with: - 1 M4×25 screw - 1 M4 nut	PLA TC

HOOK FOR HOSE HOLDER



Description	Part Numbers
Hook for hose holder	PLA HRK

11 Hose reels

Automatic hose reels are an essential tool to enhance work place organization. They save time and allow hoses to be used safely and efficiently.

Available for the following fluids:

- Compressed air
- Cold water and hot water at high and low pressure
- Oil, grease



Design

Our extensive research and development process used to manufacture our hose reels guarantees a long- lasting and reliable service life. The technology and high quality materials ensure the reels are durable and resilient.



All PREVOST automatic hose reels comply with the Machinery Directive. The following rules are also applied:

- **ISO 12100:** "Safety of machinery - General principles for design - Risk assessment and risk reduction"
- **ISO 13857:** "Safety of machinery - Safety distances to prevent hazard zones being reached by upper and lower limbs".

Hose reels

Advantages

■ RETURN SPRING

The return spring system effortlessly winds the hose back into the reel housing to significantly increase the service life of the hose.

The hose is no longer laying on the ground being exposed to contaminants, damage or creating a tripping hazard.

■ CONTROLLED HOSE RETURN SYSTEM

(identified with a yellow stop ball)

The DRFB range features a braked return system to create a safer environment for users and surrounding equipment.

When the hose is released, the brake enables the hose to reel back into the housing gradually and at a controlled speed.



■ QUICK COUPLINGS

Air hose reels are paired with a **prevoS1** quick safety coupling which offers hose whip protection and enables de-pressurization and disconnection in one simple push of a button.

The range features various types of couplings:

- 1/4", 3/8" and 1/2" clearance depending on the hose size and the corresponding air flow.
- Various profiles (Industrial, High Flow, Automotive, ARO 210) meeting the needs of international markets.



■ BEND RESTRICTOR

With the bend restrictors in place, the hose will not kink at the inlet and outlet connectors. The system is made from a lightweight polyamide and prevents impact damage from hoses. The stainless steel reel range features a stainless steel bend restrictor.

■ STOP CATCH

The reel mechanism includes a catch system that locks the hose at the desired length for the operator. This system avoids the user being weighed down by a heavy, awkward length of hose. Pulling on the hose releases the catch which allows the return spring to automatically wind the hose back into the housing.

■ WALL-MOUNTED OR OVERHEAD INSTALLATION

PREVOST hose reels can be mounted on a wall, overhead or installed on a trolley to allow easy access anywhere in the workshop. A conveniently placed reel reduces works space clutter and increases productivity and efficiency.


■ SWIVEL OR FIXED MOUNTING BRACKET

All closed drum reels (except DGF) feature swivel mounting brackets allowing the unit to rotate 180°. Open drum reels feature fixed mounting brackets, but can also be fitted with 140° swivel brackets with mounting dimensions identical to those with fixed brackets.



■ STOP BALL

The stop ball can easily be adjusted to set the length of the hose and coupling left outside of the housing. Adjusting the stop ball when the hose is in use, is not recommended.



■ SUPPLY HOSE

A hose whip with a 360° rotating coupling connects to the supply network and is included with each reel.



■ STEEL HOUSING

The housing is made from cold-stamped steel which is then hot galvanized and coated with a UV-resistant polyester powder coating. This technology ensures that housings are durable and offer high corrosion resistance while remaining environmentally friendly.



■ STAINLESS STEEL HOUSING

Reels with AISI 304 stainless steel housings can be used in all environments, particularly those where corrosion resistance is important, including the food processing industry, abattoirs, institutional facilities, swimming pools, and so on.

Hose reels

Advantages



Closed drum reels

COMPRESSED AIR									
	DSF	DSFI	DMF	DRF	DRFI	DRFB	DRFINB	DPF	DGF
Housing	Steel	Stainless steel	Steel	Steel	Stainless steel	Steel	Stainless steel	Steel	Steel
Hose return						Controlled return			
Hose	PU	PU	PU	PU/PVC	PU/PVC	PU/PVC	PU/PVC	PU	Rubber
Bracket	Swivel								Fixed
Air inlet	Supply hose: 3 ft Rotating coupling on housing			Supply hose: 3 ft Rotating coupling under plastic cover				Supply hose: 3 ft Rotating coupling on housing	
Hose diameter (in)	5/16" 3/8"	5/16"	5/16"	5/16" 3/8"	3/8"	5/16" 3/8"	3/8"	5/16" 3/8"	5/16" 3/8" 1/2"
Hose length (ft)	10' 17'	17'	40'	33' 40' 50'	40'	33' 40' 50'	40'	40' 50'	33' 50' 65'





Open drum reels


COMPRESSED AIR - WATER - GREASE - OIL - OXYGEN - ACETYLENE										
	DMO	DGO	DLO	DVO	DMO LS	DGO LS	DLO LS	DVO LS	DSFI LS	DRFI LS
Application	Air				Low-pressure water					
Drum	Steel								Stainless steel	
Hose	Rubber			PU	Rubber			PVC	PU	
Bracket	Fixed - optional swivel bracket available				Fixed - optional swivel bracket available					
Air inlet	3 ft supply hose Rotating coupling on drum				3 ft supply hose Rotating coupling on drum					
Hose diameter (in)	5/16" 3/8" 1/2"	3/8" 1/2" 5/8"	1/2" 5/8" 3/4"	3/8"	5/8"	5/8"	5/8" 3/4"	1/2" 19/32"	5/16"	3/8"
Hose length (ft)	33' - 50' 65'	33' - 65' 82'	65' - 82' 98'	82'	33'	50'	65' - 82'	50' - 65'	17'	40'

	DMOI LS	DGOI LS	DLOI LS	DMO HP	DGO HP	DMO HPI	DGO HPI	DMO OIL	DGO OIL	DMO GR	DGO GR
Application	Low-pressure water			High-pressure water				Oil		Grease	
Drum	Stainless steel			Steel		Stainless steel		Steel			
Hose	Rubber										
Bracket	Fixed - optional swivel bracket available										
Air inlet	3 ft supply hose Rotating coupling on drum			Rotating coupling on drum							
Hose diameter (in)	5/8"	5/8"	5/8" 3/4"	5/16"	5/16"	5/16"	5/16"	1/2"	1/2"	1/4"	1/4"
Hose length (ft)	33"	50'	65' - 82'	50'	65'	50'	65'	33'	50' - 65'	33' - 50'	65'

For more information about spare parts, please consult our website: www.prevostusa.com


ENCLOSED HOSE REELS FOR COMPRESSED AIR/STEEL

DSF SERIES - SMALL - POLYURETHANE HOSE W/ POLYESTER BASE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (in)	Weight (lb)	Part Numbers
		10.827	8.583	5/16"	17'	ISI 06	23	5/16"	6.60	DSF 0805IS
		10.827	8.583	3/8"	10'	ISI 06	29	3/8"	6.60	DSF 1003IS
		10.827	8.583	5/16"	17'	USI 06	23	5/16"	6.60	DSF 0805US
		10.827	8.583	3/8"	10'	USI 06	29	3/8"	6.60	DSF 1003US
		10.827	8.583	5/16"	17'	ESI 07	23	5/16"	6.60	DSF 0805ES
		10.827	8.583	3/8"	10'	ESI 07	39	3/8"	6.60	DSF 1003ES

180° swivelling bracket
Temperature: +5°F to +105°F

NEW DMF SERIES - INDUSTRIAL TYPE - POLYURETHANE HOSE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet BSPP female thread	Weight (lb)	Part Numbers
		13.78	11.299	5/16"	40'	ISI 06	18	3/8" FBSP	17.64	DMF 0812IS
		13.78	11.299	5/16"	40'	USI 06	18	3/8" FBSP	17.64	DMF 0812US
		13.78	11.299	5/16"	40'	ESI 07	18	3/8" FBSP	17.64	DMF 0812ES

180° swiveling bracket
Temperature: +5°F to +105°F


Technology
Pipe locked with
ratchet stop

Max operating
pressure
174 psi


Construction
Epoxy-coated
steel case

Connection
3.3 ft of inlet
supply hose

DRF SERIES - MEDIUM - ECONOMY TYPE - OUTER HOSE: PU/PVC - INNER: PU ETHER BASE

 	A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Fixed inlet (in)	Weight (lb)	Part Numbers
	13.386	11.89	5/16"	40'	ISI 06	18	5/16"	13.22	DRF 0812IS
	14.567	13.268	5/16"	50'	ISI 06	12	5/16"	15.43	DRF 0815IS
	13.386	11.89	3/8"	33'	ISI 06	29	3/8"	12.57	DRF 1010IS
	14.567	13.268	3/8"	40'	ISI 06	28	3/8"	14.99	DRF 1012IS
	14.567	13.268	3/8"	50'	ISI 06	28	3/8"	15.9	DRF 1015IS
	13.386	11.89	5/16"	40'	USI 06	18	5/16"	13.22	DRF 0812US
	14.567	13.268	5/16"	50'	USI 06	12	5/16"	15.43	DRF 0815US
	13.386	11.89	3/8"	33'	USI 06	29	3/8"	12.57	DRF 1010US
	14.567	13.268	3/8"	40'	USI 06	28	3/8"	14.99	DRF 1012US
	13.386	11.89	5/16"	40'	ESI 07	18	5/16"	13.22	DRF 0812ES
	14.567	13.268	5/16"	50'	ESI 07	12	5/16"	15.43	DRF 0815ES
	13.386	11.89	3/8"	33'	ESI 07	32	3/8"	12.57	DRF 1010ES
	14.567	13.268	3/8"	40'	ESI 07	28	3/8"	14.99	DRF 1012ES
	14.567	13.268	3/8"	50'	ESI 07	28	3/8"	15.87	DRF 1015ES
180° swiveling bracket Temperature: +5°F to +150°F									

DRFB SERIES - HOSE REEL W/ SAFETY RETRACTION - PU/PVC HOSE

 	A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Fixed inlet (in)	Weight (lb)	Part Numbers
	13.386	11.89	5/16"	40'	ISI 06	18	5/16"	13.22	DRFB 0812IS
	14.567	13.268	5/16"	40'	ISI 06	12	5/16"	15.43	DRFB 0815IS
	13.386	11.89	3/8"	33'	ISI 06	29	3/8"	12.57	DRFB 1010IS
	14.567	13.268	3/8"	40'	ISI 06	28	3/8"	14.99	DRFB 1012IS
	13.386	11.89	5/16"	40'	USI 06	18	5/16"	13.22	DRFB 0812US
	14.567	13.268	5/16"	50'	USI 06	12	5/16"	15.43	DRFB 0815US
	13.386	11.89	3/8"	33'	USI 06	29	3/8"	12.57	DRFB 1010US
	14.567	13.268	3/8"	40'	USI 06	28	3/8"	14.99	DRFB 1012US
	13.386	11.89	5/16"	40'	ESI 07	18	5/16"	13.22	DRFB 0812ES
	14.567	13.268	5/16"	50'	ESI 07	12	5/16"	15.43	DRFB 0815ES
	13.386	11.89	3/8"	33'	ESI 07	32	3/8"	12.57	DRFB 1010ES
	14.567	13.268	3/8"	40'	ESI 07	28	3/8"	14.99	DRFB 1012ES
	13.386	11.89	5/16"	40'	ASI 06	18	5/16"	13.22	DRFB 0812AS
	14.567	13.268	5/16"	50'	ASI 06	12	5/16"	15.43	DRFB 0815AS
	13.386	11.89	3/8"	33'	ASI 06	28	3/8"	12.57	DRFB 1010AS
	14.567	13.268	3/8"	40'	ASI 06	28	3/8"	14.99	DRFB 1012AS
180° swiveling bracket Temperature: +5°F to +150°F									

SAFETY

ENCLOSED HOSE REELS FOR COMPRESSED AIR/STEEL

Technology
Pipe locked with
ratchet stop


Max operating
pressure
174 psi

Construction
Epoxy-coated
steel case


Connection
3.3 ft of inlet
supply hose

NEW

DPF SERIES - INDUSTRIAL TYPE - POLYURETHANE HOSE

 	A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet BSPP female thread	Weight (lb)	Part Numbers
	14.843	12.48	5/16"	50'	ISI 06	18	3/8" FBSP	19.84	DPF 0815IS
	14.843	12.48	3/8"	40'	ISI 06	29	3/8" FBSP	19.84	DPF 1012IS
	14.843	12.48	5/16"	50'	USI 06	18	3/8" FBSP	19.84	DPF 0815US
	14.843	12.48	3/8"	40'	USI 06	29	3/8" FBSP	19.84	DPF 1012US
	14.843	12.48	5/16"	50'	ESI 07	18	3/8" FBSP	19.84	DPF 0815ES
	14.843	12.48	3/8"	40'	ESI 07	31	3/8" FBSP	19.84	DPF 1012ES
180° swiveling bracket Temperature: +5°F to +105°F									

DGF SERIES - LARGE INDUSTRIAL TYPE - RUBBER HOSE

 	A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPP)	Weight (lb)	Part Numbers
	20.472	18.189	5/16"	33'	ISI 06	18	3/8" FBSP	37.48	DGF 0810IS
	20.472	18.189	5/16"	50'	ISI 06	12	3/8" FBSP	40.79	DGF 0815IS
	20.472	18.189	5/16"	65'	ISI 06	9	3/8" FBSP	44.10	DGF 0820IS
	20.472	18.189	3/8"	33'	ISI 06	29	3/8" FBSP	39.69	DGF 1010IS
	20.472	18.189	3/8"	50'	ISI 06	25	3/8" FBSP	41.89	DGF 1015IS
	20.472	18.189	1/2"	33'	ISI 08	64	1/2" MBSP	41.89	DGF 1310IS
	20.472	18.189	5/16"	33'	USI 06	18	3/8" FBSP	37.48	DGF 0810US
	20.472	18.189	5/16"	50'	USI 06	12	3/8" FBSP	40.79	DGF 0815US
	20.472	18.189	5/16"	65'	USI 06	9	3/8" FBSP	44.10	DGF 0820US
	20.472	18.189	3/8"	33'	USI 06	29	3/8" FBSP	39.69	DGF 1010US
	20.472	18.189	3/8"	50'	USI 06	25	3/8" FBSP	41.89	DGF 1015US
	20.472	18.189	1/2"	33'	USI 08	64	1/2" MBSP	41.89	DGF 1310US
	20.472	18.189	5/16"	33'	ESI 07	18	3/8" FBSP	37.48	DGF 0810ES
	20.472	18.189	5/16"	50'	ESI 07	12	3/8" FBSP	40.79	DGF 0815ES
	20.472	18.189	5/16"	65'	ESI 07	9	3/8" FBSP	44.10	DGF 0820ES
	20.472	18.189	3/8"	33'	ESI 07	32	3/8" FBSP	39.69	DGF 1010ES
	20.472	18.189	3/8"	50'	ESI 07	25	3/8" FBSP	41.89	DGF 1015ES
	21.26	18.189	1/2"	33'	ESI 07	42	1/2" MBSP	41.89	DGF 1310ES
Fixed bracket Temperature: +5°F to +105°F									

ENCLOSED HOSE REELS FOR COMPRESSED AIR/STAINLESS STEEL

Technology
Pipe locked with
ratchet stop


**Max operating
pressure**
174 psi

Construction
AISI 304 stainless
steel case


Connection
3.3 ft of inlet
supply hose

Equipped with
Swivel bracket


DSF/I SERIES - 304 STAINLESS STEEL - POLYURETHANE HOSE ETHER BASE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (in)	Weight (lb)	Part Numbers
		10.827	8.583	5/16"	17'	ESI 07HE	23	5/16"	6.60	DSFI 0805ESHE
		180° swiveling bracket Temperature: +5°F to 158°F								

DRF/I SERIES - 304 STAINLESS STEEL - POLYURETHANE HOSE ETHER BASE


		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Fixed inlet (in)	Weight (lb)	Part Numbers
		14.567	13.268	3/8"	40'	ESI 07HE	28	3/8"	14.99	DRFI 1012ESHE
		180° swivelling bracket Temperature: +5°F to +158°F								

DRFB/I SERIES - HOSE REEL W/ SAFETY RETRACTION - STAINLESS STEEL POLYURETHANE HOSE ETHER BASE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Fixed inlet (in)	Weight (lb)	Part Numbers
		14.567	13.268	3/8"	40'	ESI 07HE	28	3/8"	17.42	DRFINB 1012ESHE
		180° swiveling bracket Temperature : +5°F to +158°F								
SAFETY										

OPEN HOSE REELS FOR COMPRESSED AIR/STEEL

DMO SERIES - MEDIUM - RUBBER HOSE



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPP)	Weight (lb)	Part Numbers
19.094	18.701	9.331	5/16"	33'	ISI 06	18	3/8" FBSP	35.28	DMO 0810IS
19.094	18.701	9.331	5/16"	50'	ISI 06	12	3/8" FBSP	38.58	DMO 0815IS
19.094	18.701	9.331	5/16"	65'	ISI 06	9	3/8" FBSP	41.89	DMO 0820IS
19.094	18.701	9.331	3/8"	33'	ISI 06	29	3/8" FBSP	37.48	DMO 1010IS
19.094	18.701	9.331	3/8"	50'	ISI 06	25	3/8" FBSP	41.89	DMO 1015IS
19.094	18.701	9.331	3/8"	65'	ISI 06	23	3/8" FBSP	48.50	DMO 1020IS
19.094	18.701	9.331	1/2"	50'	ISI 08	49	1/2" MBSP	48.50	DMO 1315IS
19.094	18.701	9.331	5/16"	33'	USI 06	18	3/8" FBSP	35.28	DMO 0810US
19.094	18.701	9.331	5/16"	50'	USI 06	12	3/8" FBSP	38.58	DMO 0815US
19.094	18.701	9.331	5/16"	65'	USI 06	9	3/8" FBSP	41.89	DMO 0820US
19.094	18.701	9.331	3/8"	33'	USI 06	29	3/8" FBSP	37.48	DMO 1010US
19.094	18.701	9.331	3/8"	50'	USI 06	25	3/8" FBSP	41.89	DMO 1015US
19.094	18.701	9.331	3/8"	65'	USI 06	23	3/8" FBSP	48.50	DMO 1020US
19.094	18.701	9.331	1/2"	50'	USI 08	49	1/2" MBSP	48.50	DMO 1315US
19.094	18.701	9.331	5/16"	33'	ESI 07	18	3/8" FBSP	35.28	DMO 0810ES
19.094	18.701	9.331	5/16"	50'	ESI 07	12	3/8" FBSP	38.58	DMO 0815ES
19.094	18.701	9.331	5/16"	65'	ESI 07	9	3/8" FBSP	41.89	DMO 0820ES
19.094	18.701	9.331	3/8"	33'	ESI 07	32	3/8" FBSP	37.48	DMO 1010ES
19.094	18.701	9.331	3/8"	50'	ESI 07	25	3/8" FBSP	41.89	DMO 1015ES
19.094	18.701	9.331	3/8"	65'	ESI 07	23	3/8" FBSP	37.48	DMO 1020ES
19.094	18.701	9.331	1/2"	50'	ESI 07	49	1/2" MBSP	48.50	DMO 1315ES

Temperature: +5°F to +105°F

Technology
Pipe locked with
ratchet stop

**Max operating
pressure**
174 psi

Construction
Epoxy-coated
steel case


Connection
3.3 ft of inlet
supply hose

Equipped with
Fixed bracket

DGO SERIES - LARGE - RUBBER HOSE

A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSP)	Weight (lb)	Part Numbers
19.094	18.701	9.331	3/8"	82'	ISI 06	18	3/8" FBSP	57.33	DGO 1025IS
19.094	18.701	9.331	1/2"	65'	ISI 08	35	1/2" MBSP	59.52	DGO 1320IS
19.094	18.701	9.331	5/8"	33'	ISI 11	106	1/2" MBSP	55.12	DGO 1610IS
19.094	18.701	9.331	3/8"	82'	USI 06	18	3/8" FBSP	57.33	DGO 1025US
19.094	18.701	9.331	1/2"	65'	USI 08	35	1/2" MBSP	59.52	DGO 1320US
19.094	18.701	9.331	5/8"	33'	USI 11	106	1/2" MBSP	55.12	DGO 1610US
19.094	18.701	9.331	3/8"	82'	ESI 07	18	3/8" FBSP	57.33	DGO 1025ES
19.094	18.701	9.331	1/2"	65'	ESI 07	35	1/2" MBSP	59.52	DGO 1320ES
19.094	18.701	9.331	5/8"	33'	ESI 11	106	1/2" MBSP	55.12	DGO 1610ES

Temperature: +5°F to +105°F



OPEN HOSE REELS FOR COMPRESSED AIR/STEEL

Technology
Pipe locked with
ratchet stop


**Max operating
pressure**
174 psi

Construction
Epoxy-coated
steel case

Connection
3.3 ft of inlet
supply hose

Equipped with
Fixed bracket


DVO SERIES - MEDIUM - POLYURETHANE BRAIDED HOSE



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet	Weight (lb)	Part Numbers
18.11	17.598	-	3/8"	82'	ISI 06	18	3/8"	50.71	DVO 1025IS
18.11	17.598	-	3/8"	82'	USI 06	18	3/8"	50.71	DVO 1025US
18.11	17.598	-	3/8"	82'	ESI 07	18	3/8"	50.71	DVO 1025ES

Temperature: +5°F to +105°F

DLO SERIES - EXTRA LARGE - RUBBER HOSE



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet BSPP male thread	Weight (lb)	Part Numbers
24.213	24.016	-	1/2"	98'	ISI 11	30	1/2" MBSP	85.99	DLO 1330IS
24.213	24.016	-	5/8"	82'	ISI 11	60	1/2" MBSP	90.40	DLO 1625IS
24.213	24.016	-	3/4"	65'	ISI 11	85	1" MBSP	92.61	DLO 1920IS
24.213	24.016	-	1/2"	98'	USI 11	30	1/2" MBSP	85.99	DLO 1330US
24.213	24.016	-	5/8"	82'	USI 11	60	1/2" MBSP	90.40	DLO 1625US
24.213	24.016	-	3/4"	65'	USI 11	85	1" MBSP	92.61	DLO 1920US
24.213	24.016	-	1/2"	98'	ESI 11	30	1/2" MBSP	85.99	DLO 1330ES
24.213	24.016	-	5/8"	82'	ESI 11	60	1/2" MBSP	90.40	DLO 1625ES
24.213	24.016	-	3/4"	65'	ESI 11	85	1" MBSP	92.61	DLO 1920ES

Temperature: +5°F to +158°F

WATER OPEN HOSE REELS/STEEL

Technology
Pipe locked with
ratchet stop

**Max operating
pressure**
145 psi


Temperature
+5°F to +140°F

Construction
Epoxy-coated
steel case


Connection
3.3 ft of inlet
supply hose

Equipped with
Fixed bracket


OPEN HOSE REEL - LOW PRESSURE WATER

		A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet BSPP male thread	Weight (lb)	Part Numbers
		19.094	18.701	9.331	5/8"	33'	ELS 09	1/2" MBSP	44.10	DMO 1610LS
		19.094	18.701	9.331	5/8"	50'	ELS 09	1/2" MBSP	55.12	DGO 1615LS

OPEN HOSE REEL - LOW PRESSURE WATER

		A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet BSPP male thread	Weight (lb)	Part Numbers
		24.213	24.016	-	5/8"	82'	ELS 09	1/2" MBSP	97	DLO 1625LS
		24.213	24.016	-	3/4"	65'	ELS 09	1" MBSP	92.61	DLO 1920LS

OPEN HOSE REEL - LOW PRESSURE WATER

		A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet (in)	Weight (lb)	Part Numbers
		19.488	18.701	-	1/2"	65'	ELS 09	3/4"	50.71	DVO 1320LS
		19.488	18.701	-	19/32"	50'	ELS 09	3/4"	50.71	DVO 1515LS

ENCLOSED HOSE REELS FOR WATER/STAINLESS STEEL

Technology
Pipe locked with
ratchet stop

**Max operating
pressure**
145 psi

Temperature
+5°F to +140°F


Construction
AISI 304 stainless
steel case

Connection
3.3 ft of inlet
supply hose

Equipped with
Swivel bracket


DSF/I SERIES - 304 STAINLESS STEEL - POLYURETHANE BRAIDED HOSE WITH ETHER BASE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet (in)	Weight (lb)	Part Numbers
		10.827	8.583	5/16"	17'	ELS 09	5/16"	6.60	DSFI 0805LS

DRF/I SERIES - 304 STAINLESS STEEL - POLYURETHANE HOSE ETHER BASE

		A (inch)	B (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet (in)	Weight (lb)	Part Numbers
		14.567	13.268	3/8"	40'	ELS 09	3/8"	13.89	DRFI 1012LS

WATER OPEN HOSE REELS/STAINLESS STEEL

Technology
Pipe locked with
ratchet stop

**Max operating
pressure**
145 psi


Temperature
+5°F to +140°F

Construction
AISI 304 stainless
steel case

Connection
3.3 ft of inlet
supply hose


Equipped with
Fixed bracket

DMOI - DGOI SERIES - 304 - OPEN HOSE REEL - STAINLESS STEEL LOW PRESSURE WATER - FOOD GRADE



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet BSPP male thread	Weight (lbs)	Part Numbers
19.094	18.701	9.331	5/8"	33'	ELS 09	1/2" MBSP	44.10	DMOI 1610LS
19.094	18.701	9.331	5/8"	50'	ELS 09	1/2" MBSP	55.12	DGOI 1615LS

304 STAINLESS STEEL WITH RUBBER HOSE - FOOD GRADE



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Coupler	Swivel inlet BSPP male thread	Weight (lbs)	Part Numbers
24.567	24.016	-	5/8"	82'	ELS 09	1/2" MBSP	97	DLOI 1625LS
24.567	24.016	-	3/4"	65'	ELS 09	1" MBSP	92.61	DLOI 1920LS

HOSE REELS FOR HOT WATER HIGH PRESSURE

Technology
Pipe locked with
ratchet stop


Max operating
pressure
5800 psi

Temperature
-40°F to +302°F

Equipped with
Fixed bracket


OPEN HOSE REEL - HIGH PRESSURE STEEL - HIGH PRESSURE REINFORCED RUBBER HOSE

		A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lbs)	Part Numbers
		19.094	18.701	9.331	5/16"	50'	3/8" MBSP M22 x 1.5	3/8" FBSP	35.28	DMO 0815HP
		19.094	18.701	9.331	5/16"	65'	3/8" MBSP M22 x 1.5	3/8" FBSP	46.30	DGO 0820HP



OPEN HOSE REEL - HIGH PRESSURE STAINLESS STEEL - HOT WATER - HP REINFORCED RUBBER HOSE

		A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lbs)	Part Numbers
		19.094	18.701	9.331	5/16"	50'	3/8" MBSP M22 x 1.5	3/8" FBSP	35.28	DMO 0815HPI
		19.094	18.701	9.331	5/16"	65'	3/8" MBSP M22 x 1.5	3/8" FBSP	46.30	DGO 0820HPI




REELS WITHOUT HOSE FOR WATER/STEEL HIGH PRESSURE

Technology
Pipe locked with
ratchet stop

Construction
Epoxy-coated
steel case

Equipped with
Fixed bracket

OPEN HOSE REEL



A (inch)	B (inch)	C (inch)	Outlet BSPP male thread	Swivel inlet BSPP female thread	Capacity (ft)	Weight (lbs)	Part Numbers
19.094	18.701	9.331	3/8" MBSP	3/8" FBSP	50'	33.07	DMO NHP
19.094	18.898	9.331	3/8" MBSP	3/8" FBSP	65'	44.10	DGO NHP

Pressure: 5800 psi


HOSE REELS FOR GREASE AND OIL

Technology
Pipe locked with
ratchet stop

Construction
Epoxy-coated
steel case

Equipped with
Fixed bracket


OPEN HOSE REEL - RUBBER HOSE - MEDIUM PRESSURE - OIL



A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Outlet BSPP male thread	Swivel inlet BSPP male thread	Weight (lb)	Part Numbers
19.094	18.701	9.331	1/2"	33'	1/2" MBSP	1/2"	39.69	DMO 1310OIL
19.094	18.701	9.331	1/2"	50'	1/2" MBSP	1/2"	50.71	DGO 1315OIL
19.094	18.898	9.331	1/2"	65'	1/2" MBSP	1/2"	59.52	DGO 1320OIL

Max Pressure: 870 psi
Temperature: +15°F to +105°F

OPEN HOSE REEL - RUBBER HOSE - HIGH PRESSURE - GREASE




A (inch)	B (inch)	C (inch)	ID (in)	Length (ft)	Outlet BSPP male thread	Swivel inlet BSPP male thread	Weight (lb)	Part Numbers
19.094	18.701	9.331	1/4"	33'	1/4" MBSP	1/4"	40.79	DMO 0610GR
19.094	18.701	9.331	1/4"	50'	1/4" MBSP	1/4"	45.20	DMO 0615GR
19.094	18.701	9.331	1/4"	65'	1/4" MBSP	1/4"	59.53	DGO 0620GR

Max Pressure: 5800 psi
Temperature: +15°F to +210°F

BRACKET FOR HOSE REELS STAINLESS STEEL

Construction
Stainless steel
AISI 316


STAINLESS STEEL SWIVEL BRACKET FOR DGOI HOSE REEL

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Model (of hose reel)	Part Numbers
		7.087	8.071	5.906	5.906	0.472	For DMOI	DMOI PIV2
		9.055	8.071	7.874	5.906	0.472	For DGOI	DGOI PIV2
		6.299	14.488	4.882	11.811	0.472	For DLOI	DLOI PIV


HOSE REEL ACCESSORIES

Construction
Treated steel

SWIVEL BRACKET FOR HOSE REELS

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Model (of hose reel)	Part Numbers
		7.087	8.071	5.906	5.906	0.472	(1) For DMO	DMO PIV2
		9.055	8.071	7.874	5.906	0.472	(2) For DGO	DGO PIV2
		6.22	15.748	4.331	11.024	0.472	(3) For DLO	DLO PIV

SWIVEL BRACKET FOR DGF HOSE REELS

		A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Model (of hose reel)	Part Numbers
		16.811	1.181	11.496	0.413	3.15	For DGF	DGF PIV

12

Polyurethane and polyamide tubing

- Sturdy, flexible tubes
- Excellent coil memory, tube returns to its initial shape
- Pressure and temperature resistance
- Abrasion resistant
- Wide variety of colors to identify circuits



Length markings and labelling every 20 inches

Specifications and advantages of polyurethane ester and ether tubing

- Flexible
- Low bend radius
- Resistant to abrasion and UV radiation
- Thermal stability
- Repels oil and grease



■ PU ESTER TUBING

- High mechanical specifications

Polyurethane ester tubing	
Maximum working pressure at 68°F	int./ext. diam. Psi
	1.8 x 3 mm 203 psi
	2.5 x 4 mm 145 psi
	3 x 5 mm 159.5 psi
	4 x 6 mm 130.5 psi
	5.5 x 8 mm 116 psi
	7 x 10 mm 116 psi
	8 x 12 mm 130.5 psi
	9.5 x 14 mm 130.5 psi
	11 x 16 mm 130.5 psi
Temperature	4°F to 158°F
Minimum bend radius at 23°C	In accordance with NF E49-101
Hardness	52 Shore D
Tensile strength	40 MPa
Elongation at break	470 %
Stress at 100% elongation	16 MPa
Tear strength	120 N/mm
Abrasion	35 mm³
Fire resistance	HB UL94

Polyurethane and **polyamide tubing**

Pneumatic applications

Supply to pneumatic automation components, piping, industrial circuits.



25 meters - 82 ft. Roll



Polyurethane tubing: 100-meter drums - 328 ft. bulk rolls
Polyamide tubing: 100, 500 and 1000 ft

Specifications and advantages of Nylon 12 tube

- Resistance to hydrolysis and chemical substances
- Withstands a wide range of temperatures and pressures
- Durable
- High abrasion resistance



	PA 12 polyamide tubing	
Max working pressure at 70°F	Diam. (inch)	Psi
	0.125 x 0.080	420 psi
	0.156 x 0.105	350 psi
	0.188 x 0.138	320 psi
	0.250 x 0.180	290 psi
	0.313 x 0.236	250 psi
	0.375 x 0.275	250 psi
	0.500 x 0.375	240 psi
Temperature	-60°F to +200°F	
Hardness	70 Shore D	

For optimum connection of the tubing in the coupling, the tube should be cut at exactly 90° before inserting it in the coupling. We recommend using a R22CT tube cutter.



ASSOCIATED PRODUCTS

Push-to-connect fittings. Not suitable for braking circuits



POLYAMIDE TUBING (NYLON)

Temperature
- 60°F to +200°F

Construction
Polyamide PA 12

Highlight
Excellent shape
memory
Highly resistant
to chemicals

POLYAMIDE (NYLON) TUBING IN 100 FT ROLLS



A (inch)	B (inch)	OD (in)	ID (in)	Min. bend radius (at 70°F (in))	Max operating pressure (at 70°F (psi))	Color	Part Numbers
-	-	1/8 or 0.125	0.080	0.375	420	Blue	PABE I0918100
-	-	1/8 or 0.125	0.080	0.375	420	Black	PABK I0918100
-	-	1/8 or 0.125	0.080	0.375	420	Clear	PACR I0918100
-	-	5/32 or 0.156	0.106	0.5	350	Blue	PABE I1053100
-	-	5/32 or 0.156	0.106	0.5	350	Black	PABK I1053100
-	-	5/32 or 0.156	0.106	0.5	350	Clear	PACR I1053100
-	-	3/16 or 0.188	0.138	0.625	320	Blue	PABE I1331100
-	-	3/16 or 0.188	0.138	0.625	320	Black	PABK I1331100
-	-	3/16 or 0.188	0.138	0.625	320	Clear	PACR I1331100
-	-	1/4 or 0.250	0.180	1.25	290	Blue	PABE I1814100
-	-	1/4 or 0.250	0.180	1.25	290	Black	PABK I1814100
-	-	1/4 or 0.250	0.180	1.25	290	Clear	PACR I1814100
-	-	1/4 or 0.250	0.180	1.25	290	Red	PARD I1814100
-	-	5/16 or 0.313	0.236	1.496	250	Blue	PABE I2351100
-	-	5/16 or 0.313	0.236	1.496	250	Black	PABK I2351100
-	-	5/16 or 0.313	0.236	1.496	250	Clear	PACR I2351100
-	-	3/8 or 0.375	0.275	1.2	250	Blue	PABE I2738100
-	-	3/8 or 0.375	0.275	1.2	250	Black	PABK I2738100
-	-	3/8 or 0.375	0.275	1.2	250	Clear	PACR I2738100
-	-	3/8 or 0.375	0.275	1.2	250	Red	PARD I2738100
-	-	1/2 or 0.500	0.375	3.5	240	Blue	PABE I3212100
-	-	1/2 or 0.500	0.375	3.5	240	Black	PABK I3212100
-	-	1/2 or 0.500	0.375	3.5	240	Clear	PACR I3212100

POLYAMIDE TUBING (NYLON)

POLYAMIDE (NYLON) TUBING IN 500 FT ROLLS



A (inch)	B (inch)	OD (in)	ID (in)	Min. bend radius (at 68°F (in))	Max operating pressure (at 68°F (psi))	Color	Part Numbers
-	-	1/8 or 0.125	0.080	0.375	420	Blue	PABE I0918500
-	-	1/8 or 0.125	0.080	0.375	420	Black	PABK I0918500
-	-	1/8 or 0.125	0.080	0.375	420	Clear	PACR I0918500
-	-	5/32 or 0.156	0.106	0.5	350	Blue	PABE I1053500
-	-	5/32 or 0.156	0.106	0.5	350	Black	PABK I1053500
-	-	5/32 or 0.156	0.106	0.5	350	Clear	PACR I1053500
-	-	3/16 or 0.188	0.138	0.625	320	Blue	PABE I1331500
-	-	3/16 or 0.188	0.138	0.625	320	Black	PABK I1331500
-	-	3/16 or 0.188	0.138	0.625	320	Clear	PACR I1331500
-	-	1/4 or 0.250	0.18	1.25	290	Blue	PABE I1814500
-	-	1/4 or 0.250	0.18	1.25	290	Black	PABK I1814500
-	-	1/4 or 0.250	0.18	1.25	290	Clear	PACR I1814500

POLYAMIDE (NYLON) TUBING IN 1000 FT ROLLS




A (inch)	B (inch)	OD (in)	ID (in)	Min. bend radius (at 70°F (in))	Max operating pressure (at 70°F (psi))	Color	Part Numbers
-	-	1/8 or 0.125	0.080	0.375	420	Blue	PABE I09181000
-	-	1/8 or 0.125	0.080	0.375	420	Black	PABK I09181000
-	-	1/8 or 0.125	0.080	0.375	420	Clear	PACR I09181000
-	-	5/32 or 0.156	0.106	0.5	350	Blue	PABE I10531000
-	-	5/32 or 0.156	0.106	0.5	350	Black	PABK I10531000
-	-	5/32 or 0.156	0.106	0.5	350	Clear	PACR I10531000
-	-	3/16 or 0.188	0.138	0.625	320	Blue	PABE I13311000
-	-	3/16 or 0.188	0.138	0.625	320	Black	PABK I13311000
-	-	3/16 or 0.188	0.138	0.625	320	Clear	PACR I13311000
-	-	1/4 or 0.250	0.18	1.25	290	Blue	PABE I18141000
-	-	1/4 or 0.250	0.18	1.25	290	Black	PABK I18141000
-	-	1/4 or 0.250	0.18	1.25	290	Clear	PACR I18141000

Temperature - 60°F to +200°F	Construction Polyamide PA 12	Highlight Excellent shape memory Highly resistant to chemicals
--	--	---

TUBE CUTTER - R22 CT

		A (inch)	B (inch)	Description	Part Numbers
		4.409	1.102	Tube cutter Specially designed to get a 90° clean cut	R22 CT



POLYURETHANE ETHER BASE TUBING

Temperature - 4°F to +158°F	Construction Polyurethane	Applications Compact air transport	Highlight Food compliant (FDA)
---------------------------------------	-------------------------------------	---	---

POLYURETHANE ETHER BASE TUBING IN 100 FT ROLLS

	OD (in)	ID (in)	Min. bend radius (at 68° F (inches))	Max operating pressure (at 68°F (psi))	Color	Part Numbers
	3/8 or 0.375	0.25	0.98	147	Blue	PHBE I2538100



POLYURETHANE ESTER BASE TUBING PU

POLYURETHANE ESTER BASE TUBING IN 25 METER-BOX



ID (/OD (mm))	Min. bend radius (at 68°F (in))	Max operating pressure (at 68°F (psi))	Color	Part Numbers
2.5 x 4	0.47	145	Black	PUBK M250425
2.5 x 4	0.47	145	Blue	PUBE M250425
2.5 x 4	0.47	145	Clear	PUCR M250425
2.5 x 4	0.47	145	Green	PUGN M250425
2.5 x 4	0.47	145	Yellow	PUYW M250425
2.5 x 4	0.47	145	Grey	PUGY M250425
2.5 x 4	0.47	145	Red	PURD M250425
4 x 6	0.59	130	Black	PUBK M040625
4 x 6	0.59	130	Blue	PUBE M040625
4 x 6	0.59	130	Clear	PUCR M040625
4 x 6	0.59	130	Green	PUGN M040625
4 x 6	0.59	130	Yellow	PUYW M040625
4 x 6	0.59	130	Grey	PUGY M040625
4 x 6	0.59	130	Red	PURD M040625
5.5 x 8	0.79	123	Black	PUBK M550825
5.5 x 8	0.79	123	Blue	PUBE M550825
5.5 x 8	0.79	123	Green	PUGN M550825
5.5 x 8	0.79	123	Yellow	PUYW M550825
5.5 x 8	0.79	123	Grey	PUGY M550825
5.5 x 8	0.79	123	Red	PURD M550825
7 x 10	0.98	123	Black	PUBK M071025
7 x 10	0.98	123	Blue	PUBE M071025
7 x 10	0.98	123	Clear	PUCR M071025
7 x 10	0.98	123	Green	PUGN M071025
7 x 10	0.98	123	Yellow	PUYW M071025
7 x 10	0.98	123	Grey	PUGY M071025
7 x 10	0.98	123	Red	PURD M071025
8 x 12	1.38	130	Black	PUBK M081225
8 x 12	1.38	130	Blue	PUBE M081225
8 x 12	1.38	130	Clear	PUCR M081225
9.5 x 14	1.77	130	Black	PUBK M951425
9.5 x 14	1.77	130	Blue	PUBE M951425
9.5 x 14	1.77	130	Clear	PUCR M951425
11 x 16	2.17	130	Black	PUBK M111625

Temperature
- 4°F to +158°F

Construction
Polyurethane
Ester base

Highlight
Resistant to oils
and greases

POLYURETHANE ESTER BASE TUBING IN 100 METER-ROLLS



ID (/OD (mm))	Min. bend radius (at 68°F (in))	Max operating pressure (at 68°F (psi))	Color	Part Numbers
2.5 x 4	0.47	145	Black	PUBK M2504100
2.5 x 4	0.47	145	Blue	PUBE M2504100
2.5 x 4	0.47	145	Clear	PUCR M2504100
2.5 x 4	0.47	145	Green	PUGN M2504100
2.5 x 4	0.47	145	Yellow	PUYW M2504100
2.5 x 4	0.47	145	Grey	PUGY M2504100
2.5 x 4	0.47	145	Red	PURD M2504100
4 x 6	0.59	130	Black	PUBK M0406100
4 x 6	0.59	130	Blue	PUBE M0406100
4 x 6	0.59	130	Clear	PUCR M0406100
4 x 6	0.59	130	Green	PUGN M0406100
4 x 6	0.59	130	Yellow	PUYW M0406100
4 x 6	0.59	130	Grey	PUGY M0406100
4 x 6	0.59	130	Red	PURD M0406100
5.5 x 8	0.79	123	Black	PUBK M5508100
5.5 x 8	0.79	123	Blue	PUBE M5508100
5.5 x 8	0.79	123	Clear	PUCR M5508100
5.5 x 8	0.79	123	Green	PUGN M5508100
5.5 x 8	0.79	123	Yellow	PUYW M5508100
5.5 x 8	0.79	123	Grey	PUGY M5508100
5.5 x 8	0.79	123	Red	PURD M5508100
7 x 10	0.98	123	Black	PUBK M0710100
7 x 10	0.98	123	Blue	PUBE M0710100
7 x 10	0.98	123	Clear	PUCR M0710100
8 x 12	1.38	130	Black	PUBK M0812100
8 x 12	1.38	130	Blue	PUBE M0812100
8 x 12	1.38	130	Clear	PUCR M0812100
9.5 x 14	1.77	130	Black	PUBK M9514100

HOSE REELS /
HOSES AND CLAMPS

13 Bulk hose

There are two variables to consider when choosing the proper hose:

- **Environmental conditions:** Regular or harsh, indoor or outdoor, etc.
- **Type of fluid running through the hose:** compressed air, lubricated or dry.

To improve working conditions, select a hose that is the proper length, diameter and has the adequate flexibility necessary for job, work station and operator.



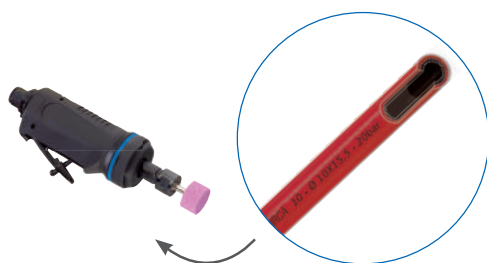
Selecting the **correct** hose

A range of hoses are available for numerous applications.

■ AIRCA

Rubber hose

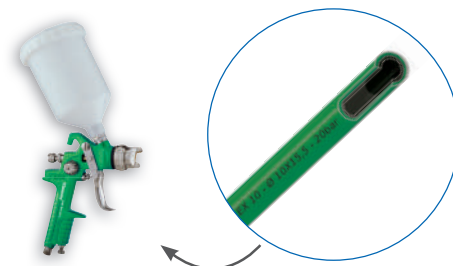
- Inner tube: black, synthetic rubber
- Synthetic fabric braid
- Outer cover: red synthetic rubber
- Flexible with good abrasion resistance
- Excellent dependability
- Applications: supply air to pneumatic tools



■ STOFLEX

Non-static rubber hose

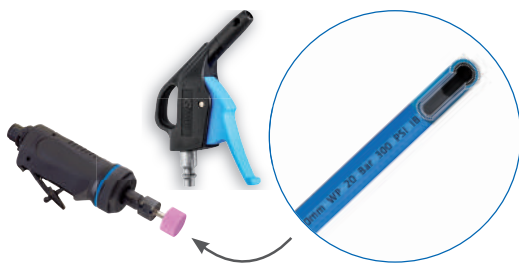
- Conductivity via hose: electrical resistance $< 10^6 \Omega/m$
- Inner tube: black synthetic rubber
- Reinforced with synthetic thread
- Outer cover: green synthetic rubber
- Applications: compressed air supply for paint spray guns



■ FLEXAIR

Polymer hybrid hose

- Combining the best characteristics of PVC and rubber
- Blue PVC inner and outer lining
- Extremely flexible hose with good, high-quality grip
- Light weight
- Applications: air supply for pneumatic tools



■ SURFLEX

Industrial PVC hose

- Hose with 2 thermoplastic layers
- Light, flexible, resists impacts and compression
- Applications: air supply for pneumatic tools



ASSOCIATED PRODUCTS

Flexible hoses fitted with safety couplings



BULK HOSE

AIRCA RUBBER AIR HOSE



Thread (MNPT)	Diameter (ID (in))	Coil (Length (Ft))	Max operating pressure (at 68°F (psi))	Temperature (°F)	Color	Part Numbers
1/4"	3/8"	25'	200	-40 to 190	Red	AIRCA 3825
1/4"	3/8"	50'	200	-40 to 190	Red	AIRCA 3850
NA	3/8"	500' Bulk hose	200	-40 to 190	Red	AIRCA 38500

SURFLEX INDUSTRIAL HOSE



Thread (MNPT)	Diameter (ID (in))	Coil (Length (Ft))	Max operating pressure (at 68°F (psi))	Temperature (°F)	Color	Part Numbers
1/4"	3/8"	25'	300	-10 to 158	Blue	SURFLEX 3825
1/4"	3/8"	50'	300	-10 to 158	Blue	SURFLEX 3850
NA	3/8"	500' Bulk hose	300	-10 to 158	Blue	SURFLEX 38500

STOFLEX- NON STATIC HOSE



Thread (MNPT)	Diameter (ID (in))	Coil (Length (Ft))	Max operating pressure (at 68°F (psi))	Temperature (°F)	Color	Part Numbers
1/4"	3/8"	25'	300	-40 to 190	Green	STOFLEX 3825
1/4"	3/8"	35'	300	-40 to 190	Green	STOFLEX 3835
1/4"	3/8"	50'	300	-40 to 190	Green	STOFLEX 3850
NA	3/8"	500' Bulk hose	300	-40 to 190	Green	STOFLEX 38500

14 Flexible shop hoses


Air hose kits **with coupling and plug**

- Wide range of air hoses available in an assortment of materials, diameters and lengths
- Couplings are paired with the appropriate hose diameter
- Fully non-scratch product
- Easy and dependable connections
- Arrive ready to use
- Easy to maneuver, move and store



Types **of equipment**

■ CRIMPED EXTENSION HOSES



- Hose connected to coupling by industrial crimping
- No protruding parts
- Assembly covered by non-scratch coating on the coupling side
- Excellent grip on the hose

■ FLEXIBLE HOSES WITH SWIVEL COUPLING



Hoses with a swivel coupling eliminates:

- Twisted hoses
- Downtime due to broken hoses
- Difficult and uncomfortable positions
- Arm and wrist fatigue

They provide the operator with the freedom of movement required for quick, high-quality work.

Rubber **air hoses**

Hoses are compatible with lubricated air systems

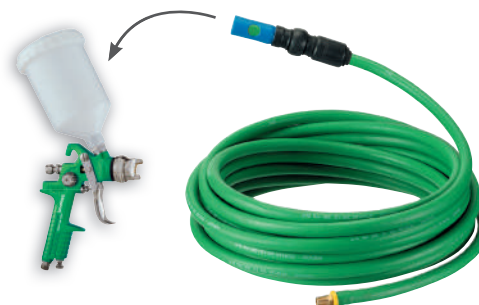


UAIR 3850FA

- COMPRESSED AIR FLEXIBLE HOSE ASSEMBLY FOR PNEUMATIC TOOLS, WITH **AIRCA** RUBBER HOSE AND SWIVEL COUPLING

Rubber *air hoses*

- COMPRESSED **AIR FLEXIBLE HOSE** ASSEMBLY FOR PAINT GUNS WITH **STOFLEX** ANTI-STATIC HOSE



ESTO 03850FA

Hybrid polymer air hoses *for non-lubricated air*



RST RISB3850

- COMPRESSED **AIR FLEXIBLE HOSE** ASSEMBLY WITH HYBRID PVC **FLEXAIR** HOSE AND **prevoS1** SAFETY QUICK RELEASE COUPLINGS

- COMPRESSED **AIR HOSE ASSEMBLY** WITH PVC **DIFLEX** HOSE AND **prevoS1** SAFETY QUICK RELEASE COUPLINGS



ISDI 1440

- **PVC FLEXIBLE HOSE** WITH PROTECTIVE GUARD AND QUICK COUPLINGS

Water hose with **ELS** automatic water coupling

- **WATER HOSE WITH ELS COUPLING** WITH SHUTOFF VALVE AND STANDARD PLUG FOR WATER (SHUT-OFF VALVE INCLUDED)



EVHO 1942



Standard profile

STOFLEX HOSE EXTENSION WITH QUICK RELEASE COUPLINGS

Operating
pressure
0 to 174 psi

Temperature
+5°F to +158°F

Equipped with
Coupler and plug

STOFLEX HOSE ASSEMBLIES WITH SWIVEL



PAINTING

Diameter (ID (in))	Coupler	Plug	Length (ft)	Part Numbers
3/8"	ISC 06SW	IRP 06	50'	RISTO 63850S
3/8"	ESC 07SW	ERP 07	35'	RESTO 73835S
3/8"	ESC 07SW	ERP 07	50'	RESTO 73850S
3/8"	ASC 06SW	ARP 06	35'	RASTO 63835S
3/8"	ASC 06SW	ARP 06	50'	RASTO 63850S

STOFLEX HOSE KIT ANTI-STATIC RUBBER

Operating
pressure
0 to 174 psi

Temperature
+5°F to +158°F

STOFLEX HOSE ASSEMBLY



PAINTING

NPT male thread	Diameter (ID (in))	Coupler	Length (ft)	Part Numbers
1/4" MNPT	3/8"	URC 06	4.5'	USTO 3804FA
1/4" MNPT	3/8"	URC 06	35'	USTO 3835FA
1/4" MNPT	3/8"	URC 06	50'	USTO 3850FA
3/8" MNPT	3/8"	ERC 07	4.5'	ESTO 3804FA
3/8" MNPT	3/8"	ERC 07	35'	ESTO 3835FA
3/8" MNPT	3/8"	ERC 07	50'	ESTO 3850FA
3/8" MNPT	3/8"	ERC 07	75'	ESTO 3875FA

STOFLEX HOSE WHIP ASSEMBLY



PAINTING

NPT male thread	Diameter (ID (in))	Plug	Length (ft) (in)	Part Numbers
1/4" MNPT	3/8"	IRP 06	24"	WHSTO 38I251
1/4" MNPT	3/8"	URP 06	24"	WHSTO 38U251
1/4" MNPT	3/8"	ERP 06	24"	WHSTO 38E251
1/4" MNPT	3/8"	ARP 06	24"	WHSTO 38A251
1/4" MNPT	3/8"	Swivel 1/4" MNPT	24"	WHSTO 38FA251

AIRCA HOSE KIT RUBBER OIL RESISTANT

Operating
pressure
0 to 174 psi

Temperature
+5°F to +158°F

Construction
EPDM

Highlight
Resistant to oils

AIRCA HOSE ASSEMBLY WITH SWIVEL



Diameter (ID (mm))	Coupler	Plug	Length (ft)	Part Numbers
3/8"	ISC 06SW	IRP 06	50'	SIAIR 63850S
3/8"	ISC 08SW	IRP 08	50'	SIAIR 83850S
3/8"	ESC 07SW	ERP 07	35'	SEAIR 73835S
3/8"	ESC 07SW	ERP 07	50'	SEAIR 73850S
3/8"	ASC 06SW	ARP 06	35'	SAAIR 63835S
3/8"	ASC 06SW	ARP 06	50'	SAAIR 63850S

AIRCA HOSE ASSEMBLY W / SWIVEL END



NPT male thread	Diameter (ID (in))	Coupler	Length (ft)	Part Numbers
1/4" MNPT	3/8"	URC 06	6'	UAIR 3806FA
1/4" MNPT	3/8"	URC 06	35'	UAIR 3835FA
1/4" MNPT	3/8"	URC 06	50'	UAIR 3850FA

HOSE REELS /
HOSES AND CLAMPS

FLEXAIR HOSE KIT PVC-POLYMER BLEND

NEW

1/4" FLEXAIR HYBRID POLYMER HOSE WITH PRESSED METAL SLEEVES, NON-SCRATCH SHEATH AND PREVOS¹ QUICK SAFETY COUPLINGS



ID (in)	Coupler	Plug	Length (ft)	Part Numbers
1/4"	ISI 06	IRP 06	25'	RST RISB1425
1/4"	ISI 06	IRP 06	50'	RST RISB1450
1/4"	ISI 06	IRP 06	100'	RST RISB14100
1/4"	USI 06	URP 06	25'	RST RUSB1425
1/4"	USI 06	URP 06	50'	RST RUSB1450
1/4"	USI 06	URP 06	100'	RST RUSB14100
1/4"	ESI 07	ERP 07	25'	RST RESB1425
1/4"	ESI 07	ERP 07	50'	RST RESB1450
1/4"	ESI 07	ERP 07	100'	RST RESB14100
1/4"	ASI 06	ARP 06	25'	RST RASB1425
1/4"	ASI 06	ARP 06	50'	RST RASB1450
1/4"	ASI 06	ARP 06	100'	RST RASB14100

NEW

3/8" FLEXAIR HYBRID POLYMER HOSE WITH PRESSED METAL SLEEVES, NON-SCRATCH SHEATH AND PREVOS¹ QUICK SAFETY COUPLINGS



ID (in)	Coupler	Plug	Length (ft)	Part Numbers
3/8"	ISI 06	IRP 06	25'	RST RISB3825
3/8"	ISI 06	IRP 06	35'	RST RISB3835
3/8"	ISI 06	IRP 06	50'	RST RISB3850
3/8"	ISI 06	IRP 06	100'	RST RISB38100
3/8"	USI 06	URP 06	25'	RST RUSB3825
3/8"	USI 06	URP 06	35'	RST RUSB3835
3/8"	USI 06	URP 06	50'	RST RUSB3850
3/8"	USI 06	URP 06	100'	RST RUSB38100
3/8"	ESI 07	ERP 07	25'	RST RESB3825
3/8"	ESI 07	ERP 07	35'	RST RESB3835
3/8"	ESI 07	ERP 07	50'	RST RESB3850
3/8"	ESI 07	ERP 07	100'	RST RESB38100
3/8"	ASI 06	ARP 06	25'	RST RASB3825
3/8"	ASI 06	ARP 06	35'	RST RASB3835
3/8"	ASI 06	ARP 06	50'	RST RASB3850
3/8"	ASI 06	ARP 06	100'	RST RASB38100

NEW

1/2" FLEXAIR HYBRID POLYMER HOSE WITH PRESSED METAL SLEEVES, NON-SCRATCH SHEATH AND PREVOS¹ QUICK SAFETY COUPLINGS



ID (in)	Coupler	Plug	Length (ft)	Part Numbers
1/2"	ISI 08	IRP 08	50'	RST RISB1250
1/2"	USI 08	URP 08	50'	RST RUSB1250
1/2"	ESI 07	ERP 07	50'	RST RESB1250

Operating
pressure
29 to 174 psi

Temperature
+5°F to +140°F

Construction
PVC

Equipped with
Coupler and
adapter

SURFLEX HOSE KIT WITH SWIVEL END



NPT male thread	Diameter (ID (in))	Coupler	Length (ft)	Part Numbers
1/4" MNPT	3/8"	IRC 06	6.5'	ISUR 3806FA
1/4" MNPT	3/8"	IRC 06	35'	ISUR 3835FA
1/4" MNPT	3/8"	IRC 06	50'	ISUR 3850FA

PVC HOSE KIT



Diameter (ID (in))	Coupler	Plug	Length (ft)	Part Numbers
1/4"	ISI 06	IRP 06'	40'	ISDI 1440
1/4"	ISI 06	IRP 06'	54'	ISDI 1454
1/4"	ESI 07	ERP 07	40'	ESDI 1440
1/4"	ESI 07	ERP 07	54'	ESDI 1454

HOSE EXTENSION FOR WATER SYSTEMS

Operating
pressure
0 to 116 psi

Temperature
+14°F to +122°F

Construction
PVC

Applications
Washing and
cleaning

Equipped with
Coupling and
adapter for water
systems

HOSE EXTENSION WITH VALVED HOSE COUPLER AND PLUG




ID (in)	Length (ft)	Coupler	Plug	Part Numbers
3/4"	42	ELS 09	ELP 09	EVHO 1942

HOSE HOLDER


HOSE HOLDER

		A (inch)	B (inch)	C (inch)	D (inch)	Includes	Part Numbers
		11.496	8.976	5.906	-	Hose holder supplied with: - 1 hook for spray gun - 1 kit of screws and nuts - 2 rubber wedges	PLA HR

STAINLESS STEEL HOSE HOLDER

		A (inch)	B (inch)	C (inch)	D (inch)	Description	Part Numbers
		13.976	8.268	6.299	6.299	Wall storage bracket Heavy duty stainless steel Suitable for 82 ft. of hose	EHS 25

15 Spiral hoses

Guaranteed freedom of movement

In workshops, spiral hoses are a versatile way to supply air to quick couplings, blow guns and other pneumatic tools.

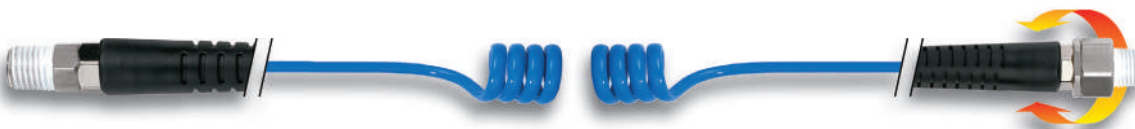
The length of the hose can be adjusted to allow operators to use tools within their work area without being restricted by weight or extra hose length. There is also no risk of twisting.



PUS polyurethane version

■ PUS POLYURETHANE SPIRAL HOSE

- Ready to use supplied hoses
- Tapered male Teflon-coated coupling threads for easy and reliable installation
- Nickel-plated brass couplings
- Good elasticity
- Returns to initial position after long-term extension, guaranteed
- Plastic guard for protection against hose breakage at couplings



Fixed coupling on supply side

Ball bearing-mounted swivel coupling on pneumatic tool side: effortless rotation even under pressure

Special polyurethane couplings supplied as spare parts:

- Swivel couplings
- Fixed couplings



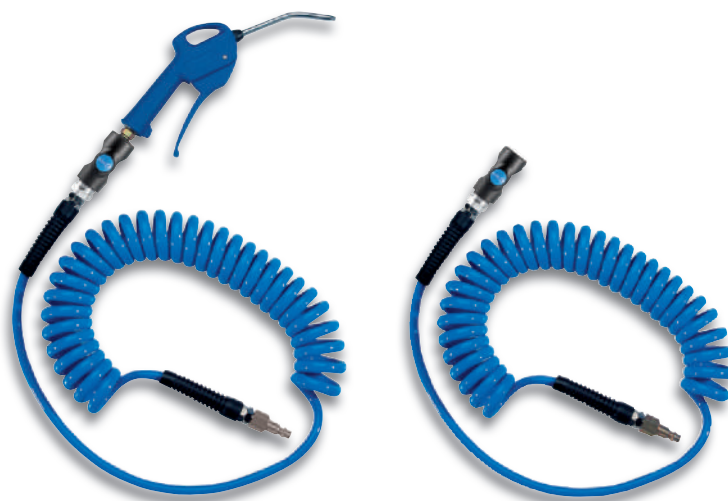
For heavy-duty applications, we recommend the use of FF PUS polyurethane spiral hose with fixed couplings on both sides.

Spiral hoses

*Blow gun assemblies and **spiral hoses***

■ **BLOW GUN AND SPIRAL HOSE ASSEMBLIES** EQUIPPED WITH **COUPLING AND PLUG**

Sealed assemblies, ready for use (with or without blow gun).



ASSOCIATED PRODUCTS

IBG 06MTL - IPG 06OSH



POLYURETHANE SPIRAL HOSES WITH NON-SCRATCHING FITTINGS

Max operating
pressure
116 psi

Temperature
+5°F to +158°F

Construction
Polyurethane

Highlight
Non scratch

Equipped with
Teflon-coated
thread

SPIRAL HOSE W/ FIXED AND ROTATING FITTINGS



NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)	Part Numbers
1/4" MNPT	1/4"	1.65"	6.5'	0.60'	PUS 252
1/4" MNPT	1/4"	1.65"	13'	1.31'	PUS 254
1/4" MNPT	5/16"	2.05"	13'	1.31'	PUS 264
1/4" MNPT	5/16"	2.05"	20'	2.07'	PUS 266
1/4" MNPT	5/16"	2.05"	26'	2.62'	PUS 268
1/4" MNPT	5/16"	2.05"	32'	3.12'	PUS 2610
3/8" MNPT	3/8"	2.56"	26'	2.36'	PUS 288
3/8" MNPT	3/8"	2.56"	50'	4.43'	PUS 2815

Blue

SPIRAL HOSE W/ FIXED AND ROTATING FITTINGS



NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)	Part Numbers
1/4" MNPT	5/16"	2.05"	13'	1.31'	PUS 264R
1/4" MNPT	5/16"	2.05"	20'	2.07'	PUS 266R

Red

SPIRAL HOSE W/ FIXED AND ROTATING FITTINGS



NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)	Part Numbers
1/4" MNPT	5/16"	2.05"	13'	1.31'	PUS 264J
1/4" MNPT	5/16"	2.05"	20'	2.07'	PUS 266J

Yellow

POLYURETHANE SPIRAL HOSES WITH NON-SCRATCHING FITTINGS

Max operating
pressure
116 psi

Temperature
+5°F to +158°F

Construction
Polyurethane

Highlight
Non scratch

Equipped with
Teflon-coated
thread

SPIRAL HOSE W/ FIXED AND ROTATING FITTINGS



NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)	Part Numbers
1/4" MNPT	5/16"	2.05"	13'	1.31'	PUS 264V
1/4" MNPT	5/16"	2.05"	20'	2.07'	PUS 266V

Green

SPIRAL HOSE W/ FIXED AND ROTATING FITTINGS



NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)	Part Numbers
1/4" MNPT	5/16"	2.05"	13'	1.31'	PUS 264NR
1/4" MNPT	5/16"	2.05"	20'	2.07'	PUS 266NR

Black

TOOL BALANCERS WITH SPIRAL-WOUND

Temperature
+23°F to +140°F

Applications
Mounting Decks,
Assembling,
Packaging

RECOILING HOSE BALANCERS



Outlet (NPT)	Max length (ft)	Weight (Weight of tool (lb))	Part Numbers
1/4" MNPT	2.1'	0.44 to 1.10	SPI 1251
1/4" MNPT	3.5'	1.54 to 4.41	SPI 3251
1/4" MNPT	4.8'	5.51 to 11.03	SPI 5252
3/8" MNPT	4.7'	13.23 to 22.05	SPI 7252

16 Clamping rings

Ear clamps

Ear clamps are used to attach hoses made from PVC, rubber and other materials.

- Secure attachment
- Quick and easy assembly
- Wide range of uses
- Economical solution



TECHNICAL ADVANTAGES

- Shakeproof attachment
- Leak proof
- Corrosion resistance
- Quick and easy to fit
- Sleek appearance
- Thoroughly deburred to avoid any risk of injury
- Usable under a wide range of varying pressures



INSTALLING AN EAR CLAMP

Selecting a clamp




1. Determine the outside diameter of the hose to be crimped
2. Add 1 mm (0.04")
3. This is the diameter to be selected from the clamp range

Installing a clamp

1. Position the clamp on the part to be crimped
2. Insert the hose between the clamp and the part
3. Gradually tighten, in 3 successive operations, using pliers (*part number SER 02*)

Removing a clamp to modify the installation

Cut the clamp widthwise using a clamp cutter



Clamping **rings**

Solid-band **worm-drive clamps**

PBS - PBI clamps:

- technology perfectly designed to clamp flexible hoses
- are made from high-quality steel



■ **ADVANTAGES**

- High clamping torque
- Reliable and durable
- No risk of loosening
- Constant clamping force
- Preserve the integrity of the hose
- Some corrosion resistance (**PBI**)
- Withstand vibrations

■ **DESIGN**

→ Material

PBS Made from high-quality carbon steel, galvanized with 10 to 14 micron zinc plating

PBI Made from 304 stainless steel

→ Square threads

Tightened via square thread drive. Forged screw threads and indentations on the clamp, to withstand vibrations

→ Raised edges

The raised edges make it easier to position the clamp and avoid any risk of cutting the hose

→ Stamped housing

The housings are made from steel tubes, protected by a blue corrosion-resistant coating



Mini **clamps**

PBM

■ APPLICATIONS

- Clamps for thin-walled and small diameter hoses

■ ADVANTAGES

- No damage to hoses
- Excellent leaktightness
- Good resistance

■ DESIGN

→ Material

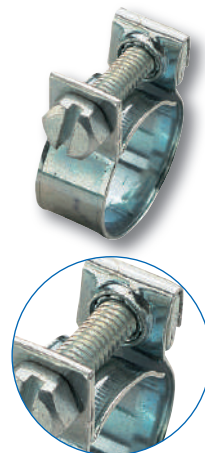
Galvanized steel

→ Raised edges

Facilitate clamp positioning and avoid any risk of cutting the hose

→ Captive nut

The nut stays in place even if the screw is removed.



Galvanized double-wire **clamps**

PF - Constant spacing double wire system: a cost-effective solution for difficult seals, particularly for smooth adapters.

■ APPLICATIONS

- For rigid and semi-rigid hoses with a cross-section that may not be perfectly cylindrical.
- Air conditioning
- Air ducts

■ DESIGN

→ Material

Galvanized steel

→ Head


Slotted 8 mm (0.31") hex head

→ Double wire




SINGLE EAR CLAMPS


TREATED STEEL SINGLE EAR CLAMP

		A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
		0.366	0.217	0.28 - 0.35	0.236	0709E
		0.406	0.236	0.31 - 0.39	0.236	0810E
		0.445	0.256	0.35 - 0.43	0.256	0911E
		0.484	0.276	0.39 - 0.47	0.256	1012E
		0.524	0.295	0.43 - 0.51	0.256	1113E
		0.563	0.315	0.47 - 0.55	0.276	1214E
		0.642	0.335	0.55 - 0.63	0.276	1416E
		0.728	0.374	0.63 - 0.71	0.276	1618E


STAINLESS STEEL SINGLE EAR CLAMP

		A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
		0.366	0.217	0.27 - 0.35	0.236	INOX 0709E
		0.406	0.236	0.31 - 0.39	0.236	INOX 0810E
		0.445	0.256	0.35 - 0.43	0.256	INOX 0911E
		0.484	0.276	0.39 - 0.47	0.256	INOX 1012E
		0.524	0.295	0.43 - 0.51	0.256	INOX 1113E
		0.563	0.315	0.47 - 0.55	0.276	INOX 1214E
		0.602	0.315	0.51 - 0.59	0.276	INOX 1315E
		0.642	0.335	0.55 - 0.63	0.276	INOX 1416E
		0.689	0.354	0.59 - 0.67	0.276	INOX 1517E
		0.728	0.354	0.63 - 0.71	0.276	INOX 1618E
		0.768	0.374	0.67 - 0.75	0.295	INOX 1719E
		0.807	0.394	0.71 - 0.79	0.295	INOX 1820E

TREATED STEEL SINGLE EAR CLAMP WITH RING


		A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
		0.335	0.217	0.30 - 0.33	0.236	0708EG
		0.374	0.236	0.31 - 0.37	0.236	0809EG
		0.413	0.256	0.35 - 0.41	0.256	0910EG
		0.453	0.276	0.39 - 0.45	0.256	1011EG
		0.492	0.295	0.41 - 0.49	0.256	1012EG
		0.524	0.315	0.45 - 0.53	0.276	1113EG
		0.602	0.335	0.51 - 0.69	0.276	1315EG
		0.681	0.374	0.59 - 0.68	0.276	1517EG

STAINLESS STEEL SINGLE EAR CLAMP WITH RING

		A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
		0.335	0.217	0.27 - 0.31	0.236	INOX 0708EG
		0.374	0.236	0.31 - 0.37	0.236	INOX 0809EG
		0.413	0.256	0.35 - 0.41	0.256	INOX 0910EG
		0.453	0.276	0.39 - 0.43	0.256	INOX 1011EG
		0.492	0.295	0.41 - 0.49	0.256	INOX 1012EG
		0.531	0.315	0.43 - 0.51	0.276	INOX 1113EG
		0.571	0.315	0.51 - 0.57	0.276	INOX 1314EG
		0.602	0.335	0.51 - 0.59	0.276	INOX 1315EG
		0.642	0.354	0.55 - 0.63	0.276	INOX 1416EG
		0.681	0.374	0.59 - 0.67	0.276	INOX 1517EG
		0.72	0.374	0.63 - 0.71	0.295	INOX 1618EG
		0.76	0.394	0.67 - 0.75	0.295	INOX 1719EG

DOUBLE EAR CLAMPS

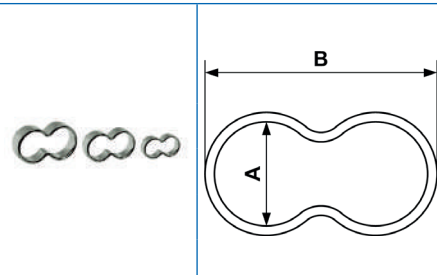
TREATED STEEL DOUBLE EAR CLAMP

		A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
		0.287	0.118	0.20 - 0.28	0.236	0507
		0.366	0.118	0.28 - 0.35	0.236	0709
		0.445	0.118	0.35 - 0.43	0.276	0911
		0.524	0.138	0.43 - 0.51	0.276	1113
		0.602	0.138	0.51 - 0.59	0.276	1315
		0.689	0.177	0.59 - 0.67	0.276	1517
		0.728	0.177	0.59 - 0.71	0.276	1518
		0.807	0.217	0.67 - 0.79	0.276	1720
		0.846	0.217	0.71 - 0.83	0.276	1821
		0.925	0.217	0.79 - 0.91	0.315	2023
		1.004	0.236	0.87 - 0.98	0.354	2225
		1.083	0.256	0.91 - 1.06	0.354	2327
		1.122	0.276	0.98 - 1.10	0.354	2528
		1.24	0.276	1.06 - 1.22	0.354	2731
		1.358	0.295	1.22 - 1.34	0.354	3134
		1.476	0.295	1.34 - 1.46	0.354	3437
		1.594	0.315	1.46 - 1.57	0.394	3740
		1.713	0.335	1.57 - 1.69	0.394	4043
		1.831	0.335	1.69 - 1.81	0.394	4346

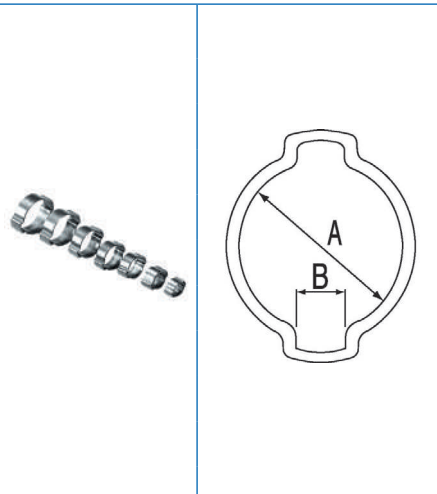
DOUBLE EAR CLAMPS

Highlight
Tamperproof
clamp

TREATED STEEL TWIN CLAMP

	A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
	0.512	1.142	0.47 - 0.51	0.354	1213D
	0.591	1.299	0.51 - 0.59	0.354	1415D
	0.669	1.457	0.63 - 0.67	0.354	1617D
	0.748	1.693	0.71 - 0.75	0.354	1819D

STAINLESS STEEL DOUBLE EAR CLAMP

	A (inch)	B (inch)	Ø min./max. (in)	Band width (in)	Part Numbers
	0.287	0.169	0.20 - 0.28	0.236	INOX 0507
	0.366	0.169	0.28 - 0.35	0.276	INOX 0709
	0.445	0.209	0.35 - 0.43	0.276	INOX 0911
	0.524	0.228	0.43 - 0.51	0.276	INOX 1113
	0.602	0.248	0.51 - 0.59	0.276	INOX 1315
	0.728	0.276	0.59 - 0.71	0.315	INOX 1518
	0.807	0.299	0.67 - 0.79	0.315	INOX 1720
	0.925	0.335	0.79 - 0.91	0.315	INOX 2023
	1.083	0.37	0.90 - 1.0	0.315	INOX 2327
Material: 304 Stainless Steel					

CRIMPING TOOL FOR EAR CLAMPS

	A (inch)	B (inch)	Description	Part Numbers
	-	-	(1) Pincers with standard jaws	SER 02
	-	-	(2) Pincers with side jaws	SER 04


EAR CLAMPS KIT

	A (inch)	B (inch)	Includes	Part Numbers
	-	-	213 ear clamps: - 47 x 0911 - 35 x 1113 - 50 x 1315 - 36 x 1518 - 28 x 1720 - 9 x 2023 - 8 x 2327	BC 0927
	-	-	3/8" ID Hose repair kit with clamps & hose fittings	ECB 06
	-	-	3/8" ID Hose repair kit with clamps & hose fittings with crimp tool	ECB 06C


SOLID-BAND WORM-DRIVE CLAMPS

Construction
Treated
zinc-plated steel

SOLID BAND WORM DRIVE CLAMPS 9MM BAND

		A (inch)	B (inch)	Ø min./max. (in)	Tightening screw (lbf.ft)	Band width (in)	Part Numbers
		0.787	0.031	0.31 - 0.55	1.8 - 2.6	0.354	PBS9 814
		0.787	0.031	0.43 - 0.67	1.8 - 2.6	0.354	PBS9 1117
		0.787	0.031	0.51 - 0.79	2.2 - 3.0	0.354	PBS9 1320
		0.945	0.031	0.59 - 0.94	2.2 - 3.0	0.354	PBS9 1524
		0.945	0.031	0.75 - 1.10	2.2 - 3.0	0.354	PBS9 1928
		0.945	0.031	0.87 - 1.26	2.2 - 3.0	0.354	PBS9 2232
		0.945	0.031	1.02 - 1.50	3.0 - 3.3	0.354	PBS9 2638
		1.142	0.031	1.26 - 1.73	3.0 - 3.3	0.354	PBS9 3244
		1.142	0.031	1.50 - 1.97	3.0 - 3.3	0.354	PBS9 3850
		1.142	0.031	1.73 - 2.20	3.0 - 3.3	0.354	PBS9 4456
		1.26	0.031	1.97 - 2.56	3.0 - 3.3	0.354	PBS9 5065

SOLID BAND WORM DRIVE CLAMPS 12MM BAND


		A (inch)	B (inch)	Ø min./max. (in)	Tightening screw (lbf.ft)	Band width (in)	Part Numbers
		0.866	0.031	0.59 - 0.94	3.0 - 3.3	0.472	PBS12 1524
		0.906	0.031	0.75 - 1.10	3.0 - 3.3	0.472	PBS12 1928
		0.984	0.031	0.87 - 1.26	3.0 - 3.3	0.472	PBS12 2232
		0.984	0.031	1.02 - 1.50	3.0 - 3.3	0.472	PBS12 2638
		1.142	0.039	1.26 - 1.73	3.7 - 4.4	0.472	PBS12 3244
		1.142	0.039	1.50 - 1.97	3.7 - 4.4	0.472	PBS12 3850
		1.142	0.039	1.73 - 2.20	3.7 - 4.4	0.472	PBS12 4456
		1.26	0.039	1.97 - 2.56	3.7 - 4.4	0.472	PBS12 5065
		1.26	0.039	2.28 - 2.95	3.7 - 4.4	0.472	PBS12 5875
		1.26	0.039	2.68 - 3.35	3.7 - 4.4	0.742	PBS12 6885
		1.26	0.039	3.03 - 3.74	3.7 - 4.4	0.472	PBS12 7795
		1.26	0.039	3.43 - 4.41	3.7 - 4.4	0.472	PBS12 87112
		1.26	0.039	4.09 - 5.43	3.7 - 4.4	0.472	PBS12 104138
		1.26	0.039	5.20 - 6.50	3.7 - 4.4	0.472	PBS12 130165
		1.26	0.039	5.91 - 7.09	3.7 - 4.4	0.472	PBS12 150180
		1.26	0.039	6.89 - 8.07	3.7 - 4.4	0.472	PBS12 175205
		1.26	0.039	7.87 - 9.09	3.7 - 4.4	0.472	PBS12 200231
		1.26	0.039	8.90 - 10.08	3.7 - 4.4	0.472	PBS12 226256
		1.26	0.039	9.88 - 11.10	3.7 - 4.4	0.472	PBS12 251282
		1.26	0.039	10.91 - 12.09	3.7 - 4.4	0.472	PBS12 277307

SOLID-BAND WORM-DRIVE CLAMPS - STAINLESS STEEL

Construction
Stainless steel

Applications
Corrosive
atmospheres

SOLID BAND STAINLESS STEEL WORM




A (inch)	B (inch)	Ø min./max. (in)	Tightening screw (lbf.ft)	Band width (in)	Part Numbers
0.787	0.031	0.32 - 0.55	1.8 - 2.6	0.35	PBI9 814
0.787	0.031	0.43 - 0.67	1.8 - 2.6	0.35	PBI9 1117
0.787	0.031	0.51 - 0.79	2.2 - 3.0	0.35	PBI9 1320
0.866	0.031	0.59 - 0.95	3.0 - 3.3	0.47	PBI12 1524
0.906	0.031	0.75 - 1.10	3.0 - 3.3	0.47	PBI12 1928
0.984	0.031	0.87 - 1.26	3.0 - 3.3	0.47	PBI12 2232
0.984	0.031	1.02 - 1.50	3.0 - 3.3	0.47	PBI12 2638
1.142	0.031	1.26 - 1.73	3.7 - 4.4	0.47	PBI12 3244
1.142	0.031	1.50 - 1.97	3.7 - 4.4	0.47	PBI12 3850
1.142	0.031	1.73 - 2.21	3.7 - 4.4	0.47	PBI12 4456
1.26	0.031	1.97 - 2.56	3.7 - 4.4	0.47	PBI12 5065
1.26	0.031	2.28 - 2.95	3.7 - 4.4	0.47	PBI12 5875
1.26	0.031	2.68 - 3.35	3.7 - 4.4	0.47	PBI12 6885
1.26	0.031	3.03 - 3.74	3.7 - 4.4	0.47	PBI12 7795
1.26	0.031	3.43 - 4.41	3.7 - 4.4	0.47	PBI12 87112
1.26	0.031	4.09 - 5.43	3.7 - 4.4	0.47	PBI12 104138
1.26	0.031	5.12 - 6.50	3.7 - 4.4	0.47	PBI12 130165
1.26	0.031	5.91 - 7.09	3.7 - 4.4	0.47	PBI12 150180
1.26	0.031	6.89 - 8.07	3.7 - 4.4	0.47	PBI12 175205
1.26	0.031	7.87 - 9.09	3.7 - 4.4	0.47	PBI12 200231
1.26	0.031	8.89 - 10.08	3.7 - 4.4	0.47	PBI12 226256
1.26	0.031	9.88 - 11.10	3.7 - 4.4	0.47	PBI12 251282
1.26	0.031	10.91 - 12.09	3.7 - 4.4	0.47	PBI12 277307

MINI AND MICRO TYPE CLAMPS

Construction
Treated
zinc-plated steel

MINI WORM CLAMPS



A (inch)	B (inch)	C (mm)	Ø min./max. (in)	Tightening screw (lbf.ft)	Band width (in)	Part Numbers
0.709	0.02	7	0.24 - 0.31	1.1	0.354	PBM 8
0.709	0.02	7	0.28 - 0.35	1.1	0.354	PBM 9
0.709	0.02	7	0.31 - 0.39	1.1	0.354	PBM 10
0.827	0.02	7	0.35 - 0.43	1.1	0.354	PBM 11
0.827	0.02	7	0.35 - 0.47	1.1	0.354	PBM 12
0.827	0.02	7	0.39 - 0.51	1.1	0.354	PBM 13
0.827	0.02	7	0.43 - 0.55	1.1	0.354	PBM 14
0.984	0.02	7	0.47 - 0.59	1.1	0.354	PBM 15
0.984	0.02	7	0.51 - 0.63	1.1	0.354	PBM 16
0.984	0.02	7	0.55 - 0.67	1.1	0.354	PBM 17

GALVANIZED DOUBLE WIRE CLAMPS

Construction
Zinc-plated steel

GALVANIZED DOUBLE WIRE CLAMPS

		A (inch)	B (inch)	Ø min./max. (in)	Dimensions (of the head of the screw (mm))	Part Numbers
		1.122	0.512	0.51 - 0.63	8	PF 1316
		1.122	0.512	0.59 - 0.83	8	PF 1521
		1.122	0.512	0.79 - 0.91	8	PF 2023
		1.319	0.512	0.87 - 0.98	8	PF 2225
		1.319	0.512	0.94 - 1.06	8	PF 2427
		1.319	0.512	1.06 - 1.22	8	PF 2731
		1.319	0.512	1.22 - 1.38	8	PF 3135
		1.713	0.512	1.38 - 1.57	8	PF 3540
		1.713	0.512	1.50 - 1.69	8	PF 3843
		1.713	0.512	1.69 - 1.89	8	PF 4348
		1.713	0.512	1.77 - 1.97	8	PF 4550
		1.713	0.512	1.93 - 2.17	8	PF 4955
		1.713	0.512	2.13 - 2.36	8	PF 5460
		1.713	0.512	2.32 - 2.56	8	PF 5965
		1.713	0.512	2.52 - 2.76	8	PF 6470
		1.713	0.512	2.72 - 2.95	8	PF 6975
		1.713	0.512	2.87 - 3.15	8	PF 7380
		1.713	0.512	3.07 - 3.35	8	PF 7885

HOSE REELS /
HOSES AND CLAMPS

WORM-DRIVE CLAMP ACCESSORIES

CLAMP DISPLAY WITH CLAMPS




Includes	Part Numbers
244 worm-drive clamps: - 100 mini type PBM: 10 x PBM 8 / 10 x PBM 9 / 10 x PBM 10 / 10 x PBM 11 / 10 x PBM 12 / 10 x PBM 13 / 10 x PBM 14 / 10 x PBM 15 / 10 x PBM 16 / 10 x PBM 17 - 144 standard PBS: 12 x PBS9 814 / 12 x PBS9 1117 / 12 x PBS9 1320 / 24 x PBS9 1524 / 12 x PBS9 1928 / 12 x PBS9 2232 / 12 x PBS9 2638 / 12 x PBS9 3244 / 12 x PBS9 3850 / 12 x PBS9 4456 / 12 x PBS9 506 - 1 flexible worm driver: PB 3000	DEPANNE 244

EAR-CLAMP PROTECTORS

Highlight
Non scratch

RUBBER COUPLER PROTECTORS



A (inch)	B (inch)	For tube OD (in)	Part Numbers
3.937	1.161	1/4" - 3/8"	ECP S11417
4.331	1.299	3/8" - 1/2"	ECP S11720

Provides a 100% non-scratch connection between the coupling **prevoS1** and the hose, by covering the ear-clamps

17 Balancers

A cable-actuated balancer keeps tools at a desired height to minimize an operators workload and maximize efficiency. An ergonomic work space facilitates user safety and promotes comfort for jobs with repetitive motion.

Balancers can be used on production lines or individual work stations. For example, manufacturing or assembly lines and packaging stations.

Cable-actuated balancers

The choice of balancer depends on the weight of the load to be supported, which must be between the minimum and maximum capacity of the balancer. The balancer position and cable adjustment are defined depending on the size of the work area.



BAL CP

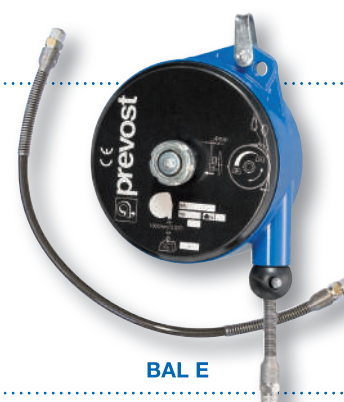
■ ADVANTAGES

- Straightforward installation and positioning based on the balancers weight and the desired position relative to the workspace
- Snap hook for safe attachment
- Sturdy aluminum construction
- Durable stainless steel cable
- Various built-in safety systems depending on the model

Balancer model	Load supported (lb)	Cable length (ft)
Series A	0.88 to 6.62 lb	5.25
Series B	4.41 to 17.64 lb	6.56
Series CP	17.64 to 30.87 lb	8.20
Series DP	8.82 to 55.13 lb	6.56
Series F	55.13 to 231.53 lb	6.56

Balancers with compressed air supply hose

The balancers are equipped with a flexible polyurethane hose which can carry the compressed air and also hold the tool at a specified height. Load capacity: 0.88 to 5.51 lb - Hose length : 4.6 ft



BAL E

Balancers with spiral-wound supply hose


SPIRALEX balancers support and provide a compressed air supply to pneumatic tools such as grinders, power screwdrivers, nailers, and so on. They can withstand sudden and quick extension. Axial spring system.



SPI

BALANCE REELS WITH STEEL CABLES

BALANCER: CABLE LENGTH 5.25'

		A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
		11.102	2.165	5.25	0.88	2.21	1.26	BAL 0410A
		11.102	2.165	5.25	2.21	4.41	1.32	BAL 1020A
		11.102	2.165	5.25	4.41	6.62	1.63	BAL 2030A
		- Grooved knob adjusts spring tension - Swivel spring hook						


BALANCER: CABLE LENGTH 6.56'





A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
13.898	3.465	6.56	4.41	8.82	4.19	BAL 2040B
13.898	3.465	6.56	8.82	13.23	4.37	BAL 4060B
13.898	3.465	6.56	13.23	17.64	5.03	BAL 6080B

- Grooved knob adjusts spring tension
 - Frictionless cable guide
 - Brake stops loads from falling if spring suddenly breaks

BALANCER: CABLE LENGTH 8.2'

		A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
		15	3.858	8.20	17.64	22.05	7.56	BAL 80100CP
		15	3.858	8.20	22.05	30.87	7.89	BAL 100120CP
		- Grooved knob adjusts spring tension - Frictionless cable guide - Brake stops loads from falling if spring suddenly breaks						

BALANCER: CABLE LENGTH 6.56'


		A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
		21.693	5.512	6.56	8.82	15.44	10.89	BAL 4070DP
		21.693	5.512	6.56	15.44	22.05	11.69	BAL 70100DP
		21.693	5.512	6.56	22.05	30.87	12.50	BAL 100140DP
		21.693	5.512	6.56	30.87	39.69	13.8	BAL 140180DP
		21.693	5.512	6.56	39.69	48.51	12.99	BAL 180220DP
		21.693	5.512	6.56	48.51	55.13	14.40	BAL 220250DP
		- Grooved knob adjusts spring tension - Braking device for positioning the load at different heights - Brake stops loads from falling if spring suddenly breaks - Swivel safety hook for ceiling mounting - Safety cable for ceiling mounting - Stainless steel cable with special frictionless guide - Cable wound in tapered drum rotating on ball bearings						

Temperature
+41°F to +140°F

Construction
Body: Aluminum
Cable: Stainless
steel


Applications
Mounting Decks,
Assembling,
Packaging

BALANCER: CABLE LENGTH 6.56'

		A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
		25.039	8.661	6.56	55.13	66.15	24.92	BAL 250300F
		25.039	8.661	6.56	66.15	77.18	24.92	BAL 300350F
		25.039	8.661	6.56	77.18	99.23	26.92	BAL 350450F
		25.039	8.661	6.56	99.23	121.28	26.92	BAL 450550F
		25.039	8.661	6.56	121.28	143.33	28.8	BAL 550650F
		25.039	8.661	6.56	143.30	165.35	30.56	BAL 650750F
		25.039	8.661	6.56	165.38	198.45	37.13	BAL 750900F
		25.039	8.661	6.56	198.45	231.53	39.18	BAL 9001050F

- Grooved knob adjusts spring tension
- Brake stops loads from falling if spring suddenly breaks
- Swivel safety hook for ceiling mounting
- Safety cable for ceiling mounting
- Cable wound in tapered drum rotating on ball bearings

BALANCER: AIR SUPPLY HOSE - CABLE LENGTH 4.60'

		A (inch)	B (inch)	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)	Part Numbers
		11.732	4.094	4.60'	0.88	1.76	2.47	BAL 0408E
		11.732	4.094	4.60'	1.65	3.31	2.49	BAL 0715E
		11.732	4.094	4.60'	2.65	5.51	2.78	BAL 1225E

- Polyurethane hose supplies air directly to tools
- Grooved knob adjusts spring tension
- 1/4" MBSP Teflon-coated male fitting
- Max operating pressure: 116 psi at 70°F

TOOL BALANCERS WITH SPIRAL-WOUND

Temperature
+41°F to +140°F

Applications
Mounting decks,
Assembling,
Packaging

RECOILING HOSE BALANCERS

	Outlet (NPT)	Max length (ft)	Weight (Weight of tool(lb))	Part Numbers
	1/4" MNPT	2.1	0.44 to 1.10	SPI 1251
	1/4" MNPT	3.5	1.54 to 4.41	SPI 3251
	1/4" MNPT	4.8	5.51 to 11.03	SPI 5252
	3/8" MNPT	4.7	13.23 to 22.05	SPI 7252

18 Blow guns prevoS1

The **prevoS1** blow gun is compact and comfortable to use. The blow gun is equipped with an integrated PREVOST plug which is compatible with all major connection profile standards.

The plug connects directly into a **prevoS1** safety coupling to become a comfortable handle for the blow gun.



■ USE

- Fluid: compressed air
- Applications: blowing, dust removal, cleaning and drying of tools and work stations
- Industries of use: industrial, automotive, wood working, etc.

■ TECHNICAL SPECIFICATIONS

- Maximum working pressure: 174 psi
- Recommended pressure: 100 psi
- Operating temperature range: +5°F to +158°F

■ SAFETY

- Extra safety with the **prevoS1** quick couplings



■ CONSTRUCTION

- Body and lever: polyamide composite
- Seals: nitrile
- Valves: polyacetal (POM)
- Plug: nitrided steel, scratch and corrosion resistant

All materials are compliant with the RoHS directive and REACH regulations.

■ EASY TO USE

- Ergonomics and design intended to facilitate the user's work
- Compact design allows for comfortable handling and easy storage
- High-tech composite body material: tough yet lightweight and insulated so the tool remains at a comfortable working temperature

Models

The range of the **prevoS1** blow guns includes:

- **prevoS1** standard blow guns



- **prevoS1** pocket blow guns



Each blow gun is equipped with a built-in plug; various profiles are available for each type:



The plug is built into the body of the blow gun, for a more compact design and to eliminate the risk of leaks when connecting the tool to the compressed air supply.
Available packaged for retail, self service displays. Please call your Regional Sales Manager for details.

Blow guns **prevoS1**

ENERGY SAVINGS

- Low air consumption
- No risk of leaks, thanks to the plug directly embedded in the blow gun

PERFORMANCE


- Powerful and precise blowing

EXTENDED SERVICE LIFE

- Robust design and construction for a long service life
- Hermetically sealed to prevent internal contamination from external elements.


Nozzle types

OSHA nozzle



- **Material:** polyamide composite
- **Characteristics:** blow gun complying with OSHA directive 1910.242 (b), outlet pressure limited to 2 bar (30 psi)
- Complies with **OSHA**
- **Anti-scratch** tip prevents damage to surrounding equipment

MTL OSHA nozzle




- **Material:** galvanized steel
- **Characteristics:** long and narrow nozzle, powerful blowing
- Complies with **OSHA**

PRE nozzle



- **Material:** polyamide composite
- **Characteristics:** standard blow gun, direct, concentrated jet
- **Anti-scratch** tip prevents damage to surrounding equipment

MTL nozzle



- **Material:** galvanized steel
- **Characteristics:** blow gun with long tapered metal nozzle

ECR nozzle



- **Material:** polyamide composite
- **Characteristics:** air screen blow gun, protects against dust and chippings
- **Anti-scratch** tip prevents damage to surrounding equipment

SIL nozzle



- **Material:** polyamide composite
- **Characteristics:** silent blow gun (74dB) limits noise in workshop
- Complies with **OSHA**
- **Anti-scratch** tip prevents damage to surrounding equipment

Nozzle model	Air consumption (cfm) at 90 psi	Noise level (dBA) at 90 psi	Blowing force (Ozf) at 90 psi	Dynamic pressure (psi) at 0.39 in at 87 psi
OSHA	7.7	87	9.2	14
MTL	11.8	89	13.8	32
MTL OSHA	7.7	85	8.7	33
PRE	8.2	85	10	36
ECR	14.6	87	4.6	30
SIL	5.5	74	5.8	2.9
OSHA pocket	8.2	89	5.9	7.2


Accessories



■ WALL MOUNT BRACKET

- Blow gun wall mount bracket allows the gun to be removed quickly and safely without damaging the mount or the gun
- Compatible with the **prevoS1** and **27202** ranges of blow guns
- Attachment spacing: 70 mm (2.76 in)

Wall mounting bracket


		A (in)	B (in)	C (in)	Part Numbers
		2.4	3.39	2.76	BG FIX
		2.4	3.39	2.76	BG FIXM

Magnetic support version (BG FIXM).

■ BEND RESTRICTORS

- Two sizes available
- The guards provide a fully non-scratch link between the coupling and the hose, covering the clamp

Rubber guards for couplings

		A (in)	B (in)	Description	Part Numbers
		3.94	1.16	for hose ID 1/4" to 3/8"	ECP S11417
		4.33	1.3	for hose ID 3/8" to 1/2"	ECP S11720



RoHS Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (lead, mercury, cadmium, hexavalent chromium, polybrominated bi-phenyls –PBBs– and polybrominated di-phenyl ethers –PBDEs–).



REACH regulations on the improvement of the management of risks related to the usage and dangerous properties of chemicals manufactured in or imported into the EU.

Max operating
pressure
174 psi

Temperature
+5°F to +158°F

Construction
Polyamide
composite body


Highlight
Compact

Connection
Built-in plug




PREVOS1 BLOW GUN WITH PROTECTIVE AIR CURTAIN






A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
4.528	3.819	5	30	14.6	87	IBG 06ECR
prevoS1 coupler sold separately: ISI 06						

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.567	3.819	9	14	7.7	87	IBG 06OSH
		prevoS1 coupler sold separately: ISI 06						
OSHA								

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE - POCKET MODEL

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		3.858	3.661	6	7.2	8.2	89	IPG 06OSH
		prevoS1 coupler sold separately: ISI 06						
OSHA								

ASSOCIATED PRODUCTS


	
prevoS1 quick safety couplings p 18	FLEXAIR hose extension with prevoS1 coupling p 238

PREVOS1 BLOW GUNS


AUTOMOTIVE INTERCHANGE 1/4"



PREVOS1 BLOW GUN WITH METAL NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		6.654	3.819	14	32	11.8	89	UBG 06MTL
		prevoS1 coupler sold separately: USI 06						


PREVOS1 BLOW GUN WITH OSHA METAL NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		6.654	3.819	9	33	7.7	85	UBG 06MTLH
		prevoS1 coupler sold separately: USI 06						

OSHA

NEW PREVOS1 BLOW GUN WITH COMPOSITE NOZZLE





A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
4.409	3.819	10	36	8.2	85	UBG 06PRE
prevoS1 coupler sold separately: USI 06						

NEW PREVOS1 BLOW GUN WITH SILENT NOZZLE



OSHA



A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
4.291	3.819	6	3	5.5	74	UBG 06SIL
prevoS1 coupler sold separately: USI 06						

OSHA

Max operating
pressure
174 psi

Temperature
+5°F to +158°F

Construction
Polyamide
composite body


Highlight
Compact

Connection
Built-in plug




PREVOS1 BLOW GUN WITH PROTECTIVE AIR CURTAIN

NEW


		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.488	3.819	5	30	14.6	87	UBG 06ECR
		prevoS1 coupler sold separately: USI 06						

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.528	3.819	7	14	7.7	87	UBG 06OSH
		prevoS1 coupler sold separately: USI 06						

OSHA

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE - POCKET MODEL

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		3.819	3.661	6	7.2	8.2	89	UPG 06OSH
		prevoS1 coupler sold separately: USI 06						

OSHA

ASSOCIATED PRODUCTS


	
prevoS1 quick safety couplings p 23	PVC hose extension with quick couplings p 239

PREVOS1 BLOW GUNS

HIGH FLOW INTERCHANGE - 3/8"




PREVOS1 BLOW GUN WITH METAL NOZZLE

		A (inch)	B (inch)	Blowing force (at 6 bar (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 6 bar (dBA))	Part Numbers
		6.614	3.819	14	32	11.8	89	EBG 07MTL

prevoS1 coupler sold separately: ESI 07


PREVOS1 BLOW GUN WITH OSHA METAL NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		7.008	3.819	9	33	7.7	85	EBG 07MTLH

prevoS1 coupler sold separately: ESI 07


OSHA

NEW PREVOS1 BLOW GUN WITH COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.37	3.819	10	36	8.2	85	EBG 07PRE

prevoS1 coupler sold separately: ESI 07

NEW PREVOS1 BLOW GUN WITH SILENT NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.252	3.819	6	3	5.5	74	EBG 07SIL

prevoS1 coupler sold separately: ESI 07

OSHA

Max operating
pressure
174 psi

Temperature
+5°F to +158°F

Construction
Polyamide
composite body


Highlight
Compact

Connection
Built-in plug




PREVOS1 BLOW GUN WITH PROTECTIVE AIR CURTAIN


NEW

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.449	3.819	5	30	14.6	87	EBG 07ECR
		prevoS1 coupler sold separately: ESI 07						

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.488	3.819	9	14	7.7	87	EBG 07OSH
		prevoS1 coupler sold separately: ESI 07						
		OSHA						

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE - POCKET MODEL

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		3.78	3.661	6	7.2	8.2	89	EPG 07OSH
		prevoS1 coupler sold separately: ESI 07						
OSHA								

ASSOCIATED PRODUCTS

	
prevoS1 quick safety couplings p 31	FLEXAIR hose extension with prevoS1 coupling p 238

Max operating
pressure
174 psi

Temperature
+5°F to +158°F

Construction
Polyamide
composite body

Highlight
Compact


Connection
Built-in plug



PREVO S1 BLOW GUN WITH PROTECTIVE AIR CURTAIN









A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
4.488	3.819	5	30	14.6	87	ABG 06ECR
prevoS1 coupler sold separately: ASI 06						

PREVO S1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.528	3.819	9	14	7.7	87	ABG 06OSH
		prevoS1 coupler sold separately: ASI 06						
OSHA								

PREVO S1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE - POCKET MODEL


		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		3.819	3.661	6	7.2	8.2	89	APG 06OSH
		prevoS1 coupler sold separately: ASI 06						
		OSHA						

ASSOCIATED PRODUCTS


	
prevoS1 quick safety couplings p 40	FLEXAIR hose extension with prevoS1 coupling p 238

PREVOS1 BLOW GUNS

ISO 6150 C INTERCHANGE - 1/4"




PREVOS1 BLOW GUN WITH METAL NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		6.811	3.819	14	32	11.8	89	CBG 06MTL


prevoS1 coupler sold separately: CSI 06

NEW PREVOS1 BLOW GUN WITH COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.646	3.819	10	36	8.2	85	CBG 06PRE

prevoS1 coupler sold separately: CSI 06


NEW PREVOS1 BLOW GUN WITH COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.449	3.819	6	3	5.5	74	CBG 06SIL

prevoS1 coupler sold separately: CSI 06

OSHA

NEW PREVOS1 BLOW GUN WITH PROTECTIVE AIR CURTAIN

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.646	3.819	5	30	14.6	87	CBG 06ECR

prevoS1 coupler sold separately: CSI 06

Max operating
pressure
174 psi


Temperature
+5°F to +158°F

Construction
Polyamide
composite body


Highlight
Compact

Connection
Built-in plug

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		4.685	3.819	9	14	7.7	87	CBG 060SH
		prevoS1 coupler sold separately: CSI 06						
		OSHA						

PREVOS1 BLOW GUN WITH OSHA POLYAMIDE COMPOSITE NOZZLE - POCKET MODEL

		A (inch)	B (inch)	Blowing force (at 87 psi (ozf))	Dynamic pressure (psi) at 0.39 inches, at 87 psi	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Part Numbers
		3.976	3.661	6	7.2	8.2	89	CPG 060SH
		prevoS1 coupler sold separately: CSI 06						
OSHA								


ASSOCIATED PRODUCTS



prevoS1 quick safety couplings
p 43

BLOW GUN ACCESSORIES

WALL SUPPORT BRACKET FOR PREVOS1 AND 27202 BLOW GUNS

		A (inch)	B (inch)	C (inch)	Spacing (in)	Fitted with	Part Numbers
		2.677	3.386	2.756	2.76		BG FIX
		2.677	3.386	2.756	70	Magnets	BG FIXM

19

27202

blow guns

The **27202** model blow gun provides an accurate flow of air that can be controlled progressively from light blowing to a more powerful jet.

Applications

- Blowing to eliminate shavings and debris
- Dust removal
- Cleaning machines, work benches/stations and hard to access areas
- Drying production parts




Advantages

■ DESIGN



- High-tech composite material: tough, non-scratch, insulated and non-slip
- Air intake connection with brass insert for total safety
- Hermetically sealed design to prevent any infiltration of external elements that might block the mechanism
- Smooth shape to avoid dust and filings settling on the blow gun body and trigger

■ EASY TO HANDLE



- Smooth trigger action for precise flow rate control and a progressive opening to the compressed air system
- The ergonomic design of the blow gun fits perfectly in the hand.

The **27202** blow gun can be mounted on a wall:



- hang by the trigger or the ring incorporated in the body,
- or using the BG FIX mount specially designed for **prevoS1** and **27202** blow guns


* BG FIX and BG FIXM is not compatible with pocket model blow guns

The BG FIX wall mount simplifies storage and enables the blow gun to be gripped easily without damaging the mount or the gun. The blow gun can be removed from the mount simply by pulling it, without needing to lift it as would be the case with a hook.




Magnetic version available (BG FIXM)

Nozzle options




27202 ECR

- Air screen blow gun, protects against backflow of dust and shavings.
- Anti-scratch tip prevents damage to surrounding equipment.




27202 PRE

- Standard blow gun, direct and concentrated air jet.
- Anti-scratch tip prevents damage to surrounding equipment.




27202 MTL + MB13 + MB20

- Blow gun with long, tapered metal nozzle.




27202 MB40 OSH

- Blow gun compliant with OSHA: outlet pressure restricted to 30 psi (2 bar).
- Nozzle length: 40" galvanized metal



27202 SIL

- Silent blow gun: 77 dB, for reduced workshop noise
- OSHA: outlet pressure restricted to 30 psi (2 bar).
- Anti-scratch tip prevents damage to surrounding equipment.



27202 OSH + MTL OSHA + MB OSHA

- Blow gun compliant with OSHA: outlet pressure restricted to 30 psi (2 bar).
- Anti-scratch tip prevents damage to surrounding equipment.

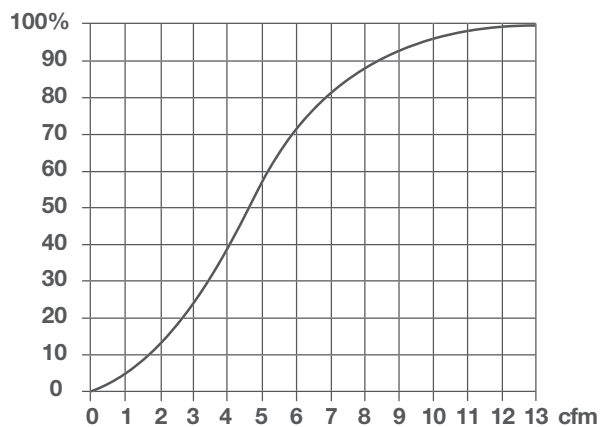
Nozzle model	Air consumption (cfm) at 87 psi	Noise level (dBA) at 87 psi	Blowing force (ozf) at 87 psi	Dynamic pressure (psi) at 4" at 87 psi
OSHA	7.7	90	9.5	17
MTL	13.5	83	13	18
PRE	8.8	84	11	29
ECR	15.9	82	8	36
SIL	7.1	77	7.5	0
MB 13 / MS 13	8.8	86	9.3	25
MB 20 / MS 20	8.5	86	8.6	22
MB 13 OSH	6.2	82	7.2	36
MB 20 OSH	6.3	83	7.6	36
MB 40 OSH	5.5	81	6.7	36

27202 blow guns

Technical specifications

27202 Blow guns				
Fluid	Maximum working pressure	Temperature	Thread	Weight
Air	145 psi	- 5°F to +158°F	1/4" FNPT	4.76 Oz (for 27202 MTL)

Flow rate at 90 psi depends
on trigger pressure (27202 PRE)



Body color can be customized or printed with a company logo.
Call your local Regional Sales Manager for details.



ASSOCIATED PRODUCTS

Spiral hose & blow gun assemblies




27202 BLOW GUN

Max operating
pressure
145 psi


Construction
Polyamide
composite body

Highlight
Adjust gradually
blowing


OSHA VENTURI NOZZLE BLOW GUN

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi) (dBA)	Blowing force (at 87 psi) (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		6.614	5.551	1/4" FNPT	7.7	90	9.5	17	27202 OSHA
		Complies with OSHA requirements							


OSHA SILENT NOZZLE

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi) (dBA)	Blowing force (at 87 psi) (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		6.417	5.551	1/4" FNPT	7.1	77	7.5	0	27202 SIL
		Complies with OSHA requirements							

PROTECTIVE SCREEN NOZZLE


		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi) (dBA)	Blowing force (at 87 psi) (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		6.614	5.551	1/4" FNPT	15.9	82	8	36	27202 ECR

BLOW GUN WITH COMPOSITE NOZZLE

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi) (dBA)	Blowing force (at 87 psi) (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		6.535	5.551	1/4" FNPT	7.2	84	11	29	27202 PRE
		6.535	5.551	1/4" FNPT	5.8	80	6.5	23	27202 PREBP3

27202 PREBP3: Option: blow gun with flow limiter
At 90 psi inlet, the air jet is equivalent to a standard blow gun with a 45 psi inlet

OSHA VENTURI METAL NOZZLE BLOW GUN

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Blowing force (at 87 psi) (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		8.267	6.535	1/4" FNPT	6.6	7.5	32	27202 MTLOSHA
		Complies with OSHA requirements						

27202


BLOW GUN

Max operating
pressure
145 psi


Construction
Polyamide
composite body

Highlight
Adjust gradually
blowing


METAL NOZZLE BLOW GUN

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi) (cfm)	Noise level (at 87 psi (dBA))	Blowing force (at 87 psi (ozf))	Dynamic pressure (at 87 psi at 4") (psi)	Part Numbers
		7.874	6.456	1/4" FNPT	13.5	83	13	18	27202 MTL
		7.874	6.456	1/4" FNPT	5.3	73	4.4	11	27202 MTLBP3
		27202 MTLBP3: Option: blow gun with flow limiter At 90 psi inlet, the air jet is equivalent to a standard blow gun with a 45 psi inlet							


METAL NOZZLE BLOW GUN

		A (inch)	B (inch)	Nozzle	Construction	Part Numbers
		7.874	6.456	Bent 4" with rubber tip & 1/4" NPT	Metal tip blow gun with non-scratch nozzle	27202 MTLRT

METAL NOZZLE BLOW GUN

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi)	Noise level (at 87 psi (dBA))	Blowing force (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Length (tube (in))	Part Numbers
		14.448	9.842	1/4" FNPT	8.8	86	9.3	25	Bent 13"	27202 MB13
		20.236	14.960	1/4" FNPT	8.5	86	8.6	22	Bent 20"	27202 MB20
		14.054	10.984	1/4" FNPT	8.8	86	9.3	25	Straight 13"	27202 MS13
		19.921	14.330	1/4" FNPT	8.5	86	8.6	22	Straight 20"	27202 MS20

OSHA METAL NOZZLE BLOW GUN

		A (inch)	B (inch)	NPT female thread	Air consumption (at 87 psi)	Noise level (at 87 psi (dBA))	Blowing force (ozf)	Dynamic pressure (at 87 psi at 4") (psi)	Length (tube (in))	Part Numbers
		12.205	13.78	1/4" FNPT	6.2	82	7.2	36	Bent 13"	27202 MB130SHA
		20.669	13.661	1/4" FNPT	5.5	81	6.6	36	Bent 20"	27202 MB200SHA
		36.614	27.559	1/4" FNPT	6.3	83	7.7	35	Bent 40"	27202 MB400SHA
		Steel Nozzle								

OSHA

ASSOCIATED PRODUCTS

		
Plug for quick release couplings p 17	Wall support bracket for blow guns p 271	FLEXAIR hose extension with prevoS1 couplings p 238

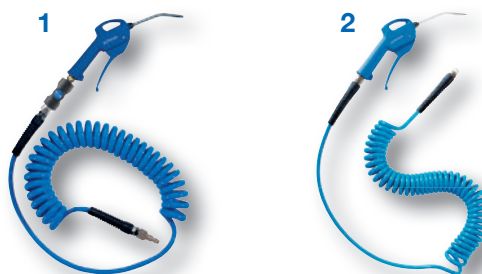
Blow guns, assemblies and pneumatic vacuum cleaners

Blow gun **assemblies**

Blow gun assemblies consist of a spiral hose fitted with a blow gun. They are delivered packaged and ready to use.

Two versions are available:

- 1 - Assemblies with quick coupling for disconnecting the blow gun
- 2 - Assemblies with spiral hose and blow gun fitted



Pneumatic **vacuum cleaners**

■ “ASPIVENT” ASVM1 ALUMINUM PNEUMATIC VACUUM CLEANERS

- Portable vacuum gun designed to suck up dust, shavings, manufacturing residue, etc., wherever the tool is connected.
- The vacuum kit consists of: a vacuum cleaner, fabric collection bag, air hose, suction nozzle, brush, discharge hose and extended nozzle.
- It is delivered ready for use.



	Inlet NPT Female thread	Max. operating pressure	Consumption	Weight	Air hose length	Length
ASVM 1	1/4" FNPT	90 psi	15 cfm	0.55 lb	4.1 ft	5.7 in

BLOW GUN KITS

BLOW GUN PACK WITH 27202 OSHA AND STANDARD QUICK COUPLING



OSHA

Includes	Part Numbers
Blow Gun 27202 OSHA Plug URP 066251 Coupler URC 061201	KB 22U
Blow Gun 27202 OSHA Plug IRP 066251 Coupler IRC 061201	KB 22I
Blow Gun 27202 OSHA Plug ERP 076251 Coupler ERC 071201	KB 22E
Blow Gun 27202 OSHA Plug ARP 066251 Coupler ARC 061201	KB 22A

Complies with OSHA requirements

SPIRAL HOSE & BLOW GUN KIT



OSHA

Includes	Diameter (in)	Length (max. (ft))	Part Numbers
Blow Gun 27202 OSHA Spiral hose PUS 252 6.5'	1/4"	6.5'	KBSH 322
Blow Gun 27202 OSHA Spiral hose PUS 254 13'	1/4"	13'	KBSH 324

Complies with OSHA requirements

BLOW GUN PACK WITH COILED HOSE AND STANDARD QUICK COUPLER



OSHA

Includes	Diameter (in)	Length (max. (ft))	Part Numbers
Blow Gun 27202 OSHA Plug URP 066251 Coupler URC 061201	1/4"	6.5'	KBSH 32U
Blow Gun 27202 OSHA Plug IRP 066251 Coupler IRC 061201	1/4"	6.5'	KBSH 32I
Blow Gun 27202 OSHA Plug ERP 076251 Coupler ERC 071201	1/4"	6.5'	KBSH 32E
Blow Gun 27202 OSHA Plug ARP 066251 Coupler ARC 061201	1/4"	6.5'	KBSH 32A


Complies with OSHA requirements

"ASPIVENT" VACUUM CLEANERS

Max operating
pressure
90 psi

Flow rate at
100 psi
14.8 cfm
($\Delta P = 8.70$ psi)

"ASPIVENT" ALUMINUM VACUUM CLEANER KIT



Inlet NPT female thread	Max operating pressure (psi)	Air consumption (cfm)	Weight (lb)	Part Numbers
1/4" FNPT	90	14.8	0.77	ASVM 1T

- Air-operated vacuum gun
- Air hose Ø 30 mm - length 49 in
- Cloth dust bag
- Extension wand length 7 in
- Crevice tool
- Brush nozzle
- Nozzle for difficult-to-access areas
- 2 x clamps

ACCESSORIES



Description	Part Numbers
ASVM1 accessories	ASVM KIT

- Air hose Ø 30 mm - length 49 in
- Cloth dust bag
- Extension wand length 7 in
- Crevice tool
- Brush nozzle
- Nozzle for difficult-to-access areas
- 2 x clamps

"ASPIVENT" VACUUM CLEANER KIT

DUST BAG KIT

	Includes	Part Numbers
	- 1 cloth dust bag - 1 clamp	ASVM 301
		

NOZZLE KIT

	Includes	Part Numbers
	- 1 round nozzle - 1 flat nozzle - 1 brush nozzle - 1 tiny nozzle	ASVM 302
		

HOSE KIT

	Includes	Part Numbers
	- 1 clamp - 1 air hose	ASVM 303
		

Wash down guns

Multiple *applications*

■ INDUSTRIAL

Used for cleaning equipment, tanks, floors, and walls in food processing and packaging facilities (dairies, abattoirs, breweries, canneries, etc.) and any other industry which requires frequent sanitation or washing down and any other industry which requires frequent sanitation or cleaning.

■ AUTOMOTIVE

Washing bodywork, cleaning chassis, accessories, machinery, etc. in garages, body shops, public works, farms, etc.

■ INSTITUTIONAL APPLICATIONS

For sanitizing superstores, restaurants, schools, public buildings, parks, etc.

■ PUBLIC WORKS

Road cleaning and water supply: pavements, pedestrian streets, pools, fountains, public gardens, flower beds, etc.



PL JET

PL JET *industrial washing spray gun*

■ ERGONOMICS

- The guard prevents any unintentional handling. The body, lever and guard have a polyamide coating for thermal insulation and impact protection.
- It offers an excellent grip, enabling steady work without causing fatigue.
- The progressive control lever can be used to vary the jet shape from a wide conical spray to a powerful, concentrated straight jet.
- The hook can be used to hold the trigger open for extended use.

■ DESIGN

- The water flow rate is adjustable via a screw at the rear of the gun, enabling the flow to be reduced for lower water consumption.
- The mechanism is straightforward and secure. The double seal on the needle provides complete leaktightness.
- The rounded shape of the body and handle prevent the build-up of dirt and facilitate maintenance.
- The three extremities have a rubber coating to prevent any risk of scratches to delicate surfaces.



Wash down guns

■ PL JETI STAINLESS STEEL VERSION

Anti-corrosive

- Recommended for food industry and dockside use (salty and aggressive environments)



PL JETI



■ TECHNICAL SPECIFICATIONS

Washing spray guns		
	PL JET	PL JETI
Body material	Brass	316 stainless steel
Protection	Nylon and glass fiber	EPDM rubber
Gasket material	Brass	Viton
Piston material	Brass	Stainless steel
Max. temperature	140°F	203°F
Max. pressure	350 psi	350 psi
Weight	2.04 lb	2.14 lb
Flow rate	16 GPM at 350 psi 11 GPM at 145 psi	16 GPM at 350 psi 11 GPM at 145 psi
BSPP female thread	1/2" FBSP	1/2" FBSP

PM JET multi-purpose washing guns

■ ERGONOMICS

- Easy-to-handle, lightweight spray gun
- Trigger protected by safety guard
- Versatile trigger adjustment
- Jet adjustable using the trigger:
 - Directional jet (trigger pressed)
 - 60° conical spray (trigger released)
- Rotating air intake

■ DESIGN

- Watertight body and plastic guard
- Rubber ring for impact protection
- Low-pressure spray gun for use up to 174 psi

■ PM JETI STAINLESS STEEL VERSION

- Anti-corrosive

■ TECHNICAL SPECIFICATIONS

Washing spray guns		
	PM JET	PM JETI
Body material	Polypropylene and glass fiber	Nylon and glass fiber
Protection	Nylon and glass fiber	Nylon and glass fiber
Piston material	Brass	303 stainless steel
Max. temperature	120°F	170°F
Max. pressure	174 psi	174 psi
Weight	0.97 lb	0.97 lb
Flow rate	13 GPM	13 GPM
BSPP female thread	1/2" FBSP	1/2" FBSP



ASSOCIATED PRODUCTS

Automatic water couplings




INDUSTRIAL WASH DOWN GUNS

BRASS HEAVY DUTY INDUSTRIAL WASH GUN


		A (inch)	B (inch)	BSPP female thread	Flow rate (GPM)	Max operating pressure (psi)	Temperature (max (°F))	Construction	Weight (lb)	Part Numbers
		6.378	8.504	1/2" FBSP	16 at 350 psi 11 at 145 psi	350	140 (continued use) 195 (occasional use)	Brass wash gun with polyamide coating	2.09	PL JET

STAINLESS STEEL HEAVY DUTY INDUSTRIAL WASH GUN


		A (inch)	B (inch)	BSPP female thread	Flow rate (GPM)	Max operating pressure (PSI)	Temperature (max (°F))	Construction	Weight (lb)	Part Numbers
		6.26	7.441	1/2" FBSP	16 at 350 psi 11 at 145 psi	350	203	316 stainless steel wash gun with EDPM rubber coating	2.03	PL JETI

MULTI-PURPOSE WASH GUNS

MULTI-PURPOSE WASH GUN

		A (inch)	B (inch)	BSPP female thread	Flow rate (at 174 psi (GPM))	Max operating pressure (psi)	Temperature (max (°F))	Construction	Weight (lb)	Part Numbers
		6.89	7.638	1/2" FBSP	13	175	120	Polypropylene adjustable spray wash gun with polyamid coating PA 66	0.97	PM JET

STAINLESS STEEL WASH GUN

		A (inch)	B (inch)	BSPP female thread	Flow rate (at 174 psi (GPM))	Max operating pressure (psi)	Temperature (max (°F))	Construction	Weight (lb)	Part Numbers
		6.89	7.638	1/2" FBSP	13	175	175	Polyamide and Stainless steel adjustable spray wash gun	0.97	PM JETI

ALTO

air treatment units

Filtration and regulation **of compressed air**

Treatment of compressed air is essential: to protect pneumatic tools, achieve professional quality work and lower maintenance costs. By ensuring air is free of dust, oil and liquid water, **ALTO** units extend the service life of pneumatic tools and guarantee they operate efficiently.

The range

ALTO treatment units are available as modules (filter, regulator, lubricator, filter-regulator) or as a complete unit. They arrive fully assembled and packaged with a pressure gauge and wall mounting brackets. They cover a range of sizes from 1/8" to 1" threads.

Range	Thread
ALTO 1	1/4" FNPT
ALTO 2	3/8" FNPT
ALTO 3	1/2" FNPT
ALTO 4	3/4" FNPT - 1" FNPT



■ ALTO FILTER

ALTO filters eliminate contaminants (particles, water and oil) from compressed air using a sintered bronze thread or borosilicate which traps solid and liquid particles as the air passes through it.

These contaminants are collected in the tank.

• Filtration

ALTO filters offer 95% separation of water, oil and solid particles greater than or equal to the filtration threshold size.

• Drain valve

A manual drain opens the bottom of the tank when the drain button is pressed, thereby evacuating the accumulated contaminants. The ALTO 1 to 4 ranges may be equipped with an automatic float drain as an option.


• Bowl

The tank is attached via a locking bayonet fitting for the **ALTO 2**, **ALTO 3** and **ALTO 4** units. **ALTO 1** units feature a thread tank.

The tank is available in 2 versions:

- Polycarbonate bowls with metal protectors for **ALTO 1, 2, 3 & 4**,
- Completely metal bowls for **ALTO 3HP**.

Range	Filtration threshold			
	40 µ	25 µ	5 µ	0.01 µ
ALTO 1		X	X	X
ALTO 2		X	X	
ALTO 3		X	X	X
ALTO 3HP	X			
ALTO 4		X		



ALTO air treatment units

ALTO REGULATOR



ALTO regulators enable the pressure to be adjusted to suit usage. A membrane and spring ensure a constant outlet pressure corresponding to the chosen value. They protect pneumatic tools from excess pressure and cut unnecessary energy consumption. Regulators are equipped with a progressive membrane. The pressure is set via a control valve.

Pressure gauge connection:

- 1/8" FBSP for **ALTO 1**, **ALTO 2** and **ALTO 3**
- 1/4" FBSP for **ALTO 4**

The filter-regulator module combines the filter and regulator functions in a single module.



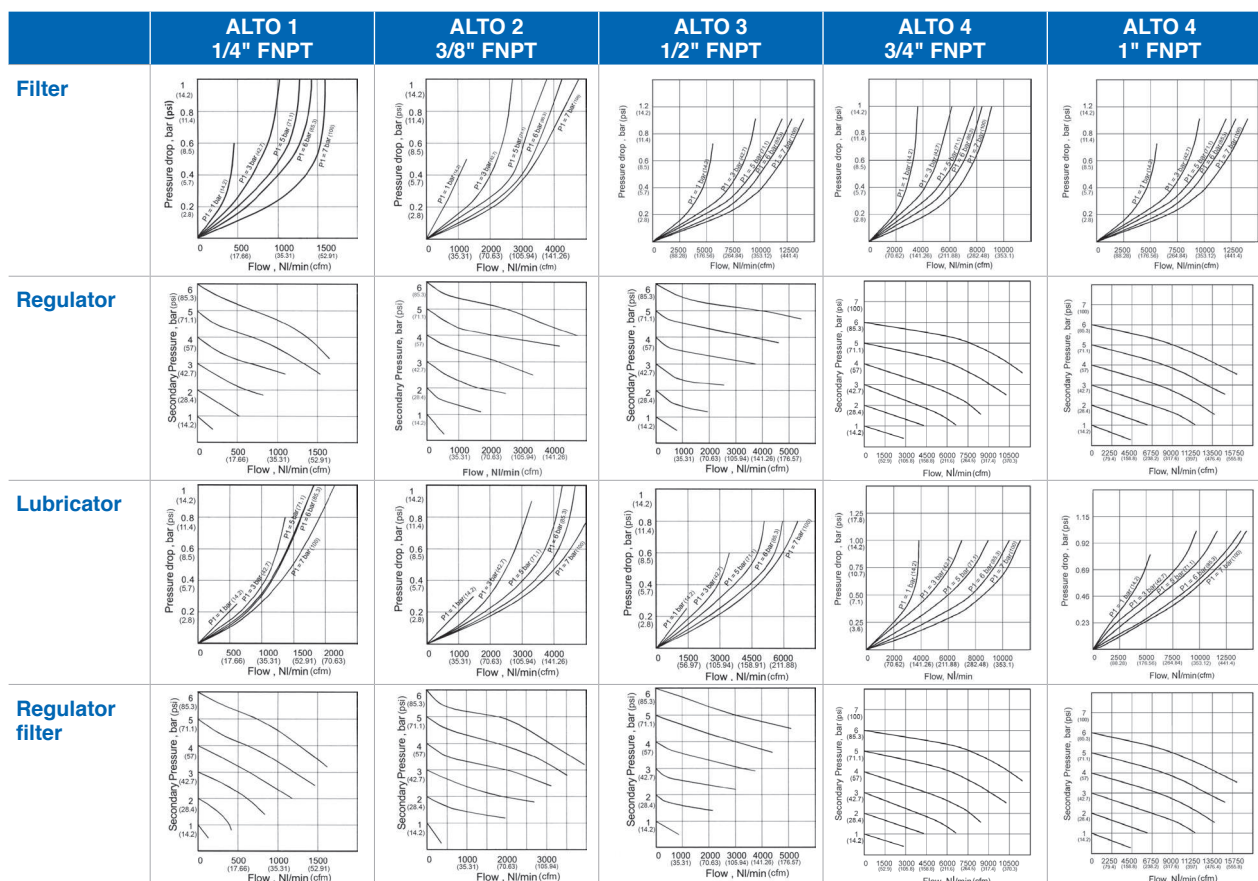
ALTO LUBRICATOR

ALTO oil mist lubricators protect your pneumatic tools by injecting a precisely dosed amount of fine lubricant into the filtered air. Lubrication reduces friction between moving parts, avoids seizure, protects against corrosion, and absorbs and evacuates heat energy. The action of ALTO lubricators extends the service life and the efficiency of pneumatic tools.

The oil flow is adjusted via a cone-point set screw, thereby controlling the amount of lubricant diffused into the pipework. Recommended oil: ISO VG32 (part number LUB 3256). The oil tank can be filled during use. The tank is attached via a locking bayonet fitting for the **ALTO 2**, **ALTO 3** and **ALTO 4** units. **ALTO 1** units feature a threaded tank.



FLOW RATE GRAPHS



ALTO AIR TREATMENT MODULES AND ASSEMBLIES

The **ALTO** range offers a wide range of flow rates. From 1/4" FNPT threads to units with 1" FNPT threads (pneumatic tools, pneumatic cylinders, blowing, inflation, paintwork, etc.).

	Filter (a)	Regulator (c)	Lubricator (b)	Filter Regulator (c)	FRL 2 blocks (c)	FRL 3 blocks (c)	Microfilter assembly (c)
							
ALTO 1 - 1/4" FNPT							
Flow rate	28 cfm	21 cfm	48 cfm	19 cfm	18 cfm	18 cfm	9 cfm
Inlet pressure	174 psi	218 psi	174 psi	174 psi	174 psi	174 psi	174 psi
Outlet pressure		7 to 145 psi		7 to 145 psi	7 to 145 psi	7 to 145 psi	7 to 145 psi
ALTO 2 - 3/8" FNPT							
Flow rate	79 cfm	88 cfm	106 cfm	64 cfm	44 cfm	71 cfm	
Inlet pressure	174 psi	218 psi	174 psi	174 psi	174 psi	174 psi	
Outlet pressure		7 to 145 psi		7 to 145 psi	7 to 145 psi	7 to 145 psi	
ALTO 3 - 1/2" FNPT							
Flow rate	124 cfm	141 cfm	200 cfm	106 cfm	99 cfm	124 cfm	53 cfm
Inlet pressure	174 psi	218 psi	174 psi	174 psi	174 psi	174 psi	174 psi
Outlet pressure		7 to 145 psi		7 to 145 psi	7 to 145 psi	7 to 145 psi	7 to 145 psi
ALTO 3HP - 1/2" FNPT							
Flow rate		141 cfm		106 cfm			
Inlet pressure		218 psi		290 psi			
Outlet pressure		7 to 181 psi		7 to 181 psi			
ALTO 4 - 3/4" FNPT							
Flow rate	177 cfm	177 cfm	254 cfm	150 cfm		124 cfm	
Inlet pressure	174 psi	218 psi	174 psi	174 psi		174 psi	
Outlet pressure		7 to 145 psi		7 to 145 psi		7 to 145 psi	
ALTO 5 - 1" FNPT							
Flow rate	230 cfm	212 cfm	318 cfm	194 cfm		177 cfm	
Inlet pressure	174 psi	218 psi	174 psi	174 psi		174 psi	
Outlet pressure		7 to 145 psi		7 to 145 psi		7 to 145 psi	

Temperature: 41°F - 122°F

(a): Inlet pressure 85 psi - ΔP: 4 psi

(b): Inlet pressure 85 psi - ΔP: 7 psi

(c): Inlet pressure 100 psi - Operating pressure: 85 psi - ΔP: 14.5 psi

SPECIAL FILTER-REGULATOR FOR PAINT APPLICATIONS

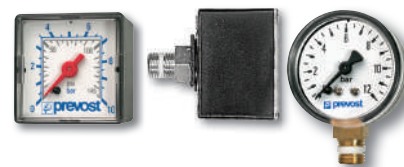
A two-unit **ALTO 3** assembly includes a a prefilter-regulator, with 5 µm filtration, a micro-filter with 0.01 µm filtration, and a pressure gauge with glass screen compatible with solvents, is available for oil-free applications. Efficiency: 99.999%



ALTO air treatment units

■ PRESSURE GAUGES

A pressure gauge is an essential tool for checking the correct operation of a circuit. PREVOST offers various models, to be selected depending on the application (pressure ranges, threads, shapes, solvent resistance, etc.) and thread positions (rear or 6 h).



■ ALTO SPACER

The spacer is an additional module, placed upstream of the lubricator, that provides four non-lubricated dry air tappings. It is assembled in the same way as other modules. A single **ALTO** unit can be used to supply several applications, only some of which require lubrication. This option is available on **ALTO 1**, **ALTO 2** and **ALTO 3** units.



The spacer has two vertical outlets and two horizontal outlets. The outlets are threaded, as follows:

- 1/4" FNPT for **ALTO 1**
- 3/8" FNPT for **ALTO 2**
- 1/2" FNPT for **ALTO 3**

Each outlet has a cylindrical male cap with gasket and hex socket drive.


For wall mounted units, use a wall mounting plate and network connection kit (part number **TC...** is recommended).

■ AIR TREATMENT ASSEMBLIES ON FRAMES

The frame enables compressed air to be treated immediately adjacent to work stations in workshops. The air is filtered with the same efficiency as in a conventional workshop with fixed work stations

Advantages: three versions available, depending on the application:

- **PTC.** Dry air version for paint booths and oil-free applications – 5 µm pre-filtration, 0.01 µm micro-filtration.
- **PTE.** Dry and lubricated air version for workshops with pneumatic tools and dry air needs – 25 µm filtration – use of pneumatic tools and dry air needs for blowing, inflation, etc.



Optional

- **Kit of four casters, part number PT RL.** Assembled on the frame, enables easy transfer from one point of use to another.
- **One wall bracket, part number PT K.** Enables the frame to be hung on a wall when needed.

Easy to use

■ MODULAR CONSTRUCTION

An assortment of easy to assemble accessories are available which quickly mount and connect to the network. They are compatible with all **ALTO 1**, **ALTO 2**, **ALTO 3** and **ALTO 4** units.



- **Assembly**

Assembly kit – part number TA M
One kit to assemble two modules
Two kits are needed to assemble three modules



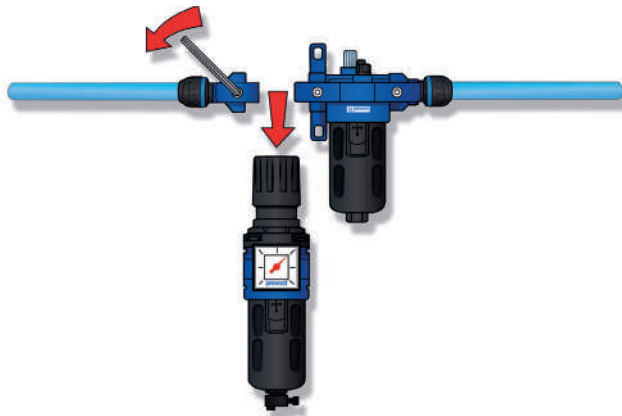
- **Assembly and wall mounting**

Assembly kit with wall mounting plate - part number TA S
One kit to assemble two modules
Two kits to assemble three modules



- **Wall mounting brackets**

for filter or lubricator – part number TP or for regulator and filter-regulator – part number TR



- **Quick connection to the pipe network**

Quick connection kit – TC P

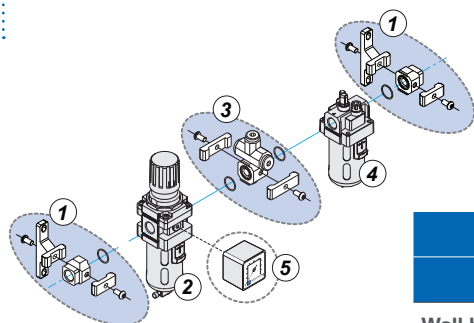
- **Quick connection and wall mounting**

Wall mounting quick connection kit – TC S

The quick connection kit enables units to be installed and removed without affecting the air piping system.

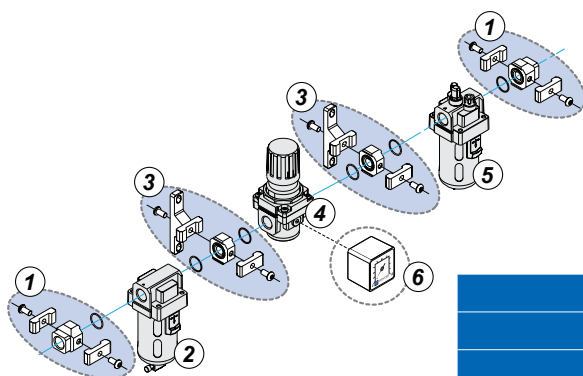
ALTO air treatment units

Assemblies and **fasteners**



Two-block filter-regulator

Ref: TB SME: 1 + 2 + 3 + 4 + 1 + 5				
		1/4" FNPT	3/8" FNPT	1/2" FNPT
Wall bracket and pipe adapter kit	1	TCS 201	TC S202	TC 203
Filter Regulator	2	TM 201	TM 202	TM 203
Outlet Block	3	TM 201	TE 202	TE 203
Lubricator	4	TM 201	TL 202	TL 203
Gauge	5	MT CA1040	MT CA1040	MT CA1040



Three-block filter-regulator

Ref.: TT SM: 2 + 3 + 4 + 3 + 5 + 6				
Ref.: TT PSM: 1 + 2 + 3 + 4 + 3 + 5 + 1 + 6				
		1/4" FNPT	3/8" FNPT	1/2" FNPT
Pipe adapter	1	TC 201	TC P202	TC P203
Filter	2	TF 201	TF 202	TF 203
Wall mounting bracket kit	3	TAS 1	TA S2	TA S3
Regulator	4	TR 201	TR 202	TR 203
Lubricator	5	TL 201	TL 202	TL 203
Gauge	6	MT CA1040	MT CA1040	MT CA1040

■ PACKAGING

ALTO modules and treatment assemblies are supplied in boxes for shelf storage or retail boxes with hanger and window panel. Part numbers for self-service boxes have a prefix K.




ALTO units for self-service

ALTO 1


1/4" FNPT AIR TREATMENT UNITS

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------


ALTO 1 - 3-PIECE-SET - 1/4" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		5.748	6.693	1/4" FNPT	17.65	174	25	TT SM201
		Equipped with a pressure gauge: 0 - 145 psi						


ALTO 1 - 3-PIECE-SET - 1/4" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		7.874	6.693	1/4" FNPT	17.65	174	25	TT PSM201
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 1 - 2-PIECE-SET - 1/4" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		3.622	6.693	1/4" FNPT	17.65	174	25	TB SM201
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 1 - 2-PIECE-SET - 1/4" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		5.748	6.693	1/4" FNPT	17.65	174	25	TB PSM201
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 1


1/4" FNPT AIR TREATMENT UNITS

Temperature
+41°F to +122°F


Construction
Body: Aluminum
Polycarbonate
bowl with metallic
protection

Equipped with
Manual drain

ALTO 1 - 2-PIECE-SET - 1/4" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET, DIVERTER BLOCK AND PIPE ADAPTERS


		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		5.276	6.693	1/4" FNPT	17.65	174	25	TB SME201
		Equipped with a pressure gauge: 0 - 145 psi 4 outlets for non-lubricated air						

ALTO 1 - 2-PIECE-SET - 1/4" MICROFILTER ASSEMBLY WITH REGULATOR (GAUGE INCLUDED) AND WALL BRACKET


		<table><tr><th>A (inch)</th><th>B (inch)</th><th>NPT female thread</th><th>Flow rate (cfm at 87 psi ΔP=14 psi)</th><th>Max operating pressure (psi)</th><th>Filtration (µm)</th><th>Part Numbers</th></tr><tr><td>3.622</td><td>6.693</td><td>1/4" FNPT</td><td>8.83</td><td>174</td><td>5 and 0.01</td><td>TB CSM201</td></tr><tr><td colspan="7">Combination fitted with dual-stage filtration for application without oil Equipped with a pressure gauge (glass dial): 0 - 145 psi</td></tr></table>	A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14 psi)	Max operating pressure (psi)	Filtration (µm)	Part Numbers	3.622	6.693	1/4" FNPT	8.83	174	5 and 0.01	TB CSM201	Combination fitted with dual-stage filtration for application without oil Equipped with a pressure gauge (glass dial): 0 - 145 psi						
A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14 psi)	Max operating pressure (psi)	Filtration (µm)	Part Numbers																	
3.622	6.693	1/4" FNPT	8.83	174	5 and 0.01	TB CSM201																	
Combination fitted with dual-stage filtration for application without oil Equipped with a pressure gauge (glass dial): 0 - 145 psi																							
PAINTING																							

PAINTING

FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 100 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		1.575	6.693	1/4" FNPT	19.43	174	25	TM SM201
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 1 - 1/4" FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		3.701	6.693	1/4" FNPT	19.43	174	25	TM PSM201
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 1


1/4" FNPT MODULES

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------

ALTO 1 - 1/4" FILTER AND MICRO FILTER

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=4psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		1.575	4.449	-	1/4" FNPT	28.24	174	25	TF 201
		1.575	4.449	-	1/4" FNPT	28.24	174	0.01	TC 201


ALTO 1 - 1/4" REGULATOR

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 100 psi ΔP=14psi)	Operating pressure (psi)	Part Numbers
		1.575	3.189	-	1/4" FNPT	21.18	Inlet: 217 Outlet: 7-145	TR 201
		Pressure gauge port size: G 1/8						


ALTO 1 - 1/4" LUBRICATOR

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=7 psi)	Max operating pressure (psi)	Part Numbers
		1.575	5.315	-	1/4" FNPT	47.65	174	TL 201

ALTO 1 - 1/4" FILTER-REGULATOR 5 MICRON

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 100 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		1.575	6.693	-	1/4" FNPT	19.43	Inlet: 174 Outlet: 7 - 145	25	TM 201
		1.575	6.693	-	1/4" FNPT	19.43	Inlet: 174 Outlet: 7 - 145	5	TM 20105
		Connection pressure gauge: G 1/8							


ALTO 1 - 1/4" DIVERTER BLOCK FOR OUTLETS WITHOUT OIL

		A (inch)	B (inch)	C (inch)	NPT female thread	Air outlet	Part Numbers
		1.692	2.165	1.89	1/4" FNPT	4 non-lubricated outlets	TE 201


ALTO 1

1/4" FNPT ACCESSORIES


ALTO 1 - 1/4" WALL BRACKET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.575	1.142	1.063	(1) For filter or lubricator 1/4" FNPT	TP Q1
		1.575	1.063	1.063	(2) For regulator or filter regulator 1/4" FNPT	TR Q1
		-	-	-	(3) Nut for regulator bracket	TR E1


ALTO 1 - 1/4" WALL MOUNTING BRACKET KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.26	2.874	2.008	- 1 set TA S1 for a 1/4" FNPT 2-piece-set - 2 sets TA S1 for a 1/4" FNPT 3-piece-set	TA S1


ALTO 1 - 1/4" MODULE CONNECTOR KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.142	1.024	-	- 1 set TA M1 for a 1/4" FNPT 2-piece-set - 2 sets TA M1 for a 1/4" FNPT 3-piece-set	TA M1


ALTO 1 - 1/4" MODULE CONNECTION

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.417	1.024	-	1/4" FNPT	TC P201

ALTO 1 - 1/4" MODULAR WALL MOUNT BRACKET

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.417	2.874	2.008	1/4" FNPT	TC S201

ALTO 1 - 1/8" - 1/4" AUTOMATIC FLOAT DRAIN

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		5.945	2.008	-	For filter: 1/8" and 1/4" FNPT	TD F1

FILTER AND MICRO FILTER ELEMENT ALTO 1


 	A (inch)	B (inch)	C (inch)	Filtration (µm)	Part Numbers
	-	-	-	(1) 25	TF C1
	-	-	-	(1) 5	TF C105
	-	-	-	(2) 0.01	TF C101

MANUAL DRAIN BY DRAIN KNOB FOR FILTER OR FILTER-REGULATOR ALTO 1 - 2 - 3 - 4


	A (inch)	B (inch)	C (inch)	Description	Part Numbers
	-	-	-	For filters: 1/4" - 1/8" - 3/8" - 1/2" - 3/4" - 1" FNPT	TP F45

ALTO 2 - 3/8" FNPT MEDIUM COMPRESSED AIR TREATMENT UNITS


ALTO 2 - 3-PIECE-SET - 3/8" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		7.559	8.661	3/8" FNPT	70.60	174	25	TT SM202
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 2 - 3-PIECE-SET - 3/8" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS


		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		9.843	8.661	3/8" FNPT	70.60	174	25	TT PSM202
		Equipped with a pressure gauge: 0 - 145 psi						

2-PIECE-SET - FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET


		A (inch)	B (inch)	Female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		4.882	8.661	3/8"	44.15	174	25	TB SM202
		Equipped with a pressure gauge: 0 - 145 psi						

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------


ALTO 2 - 2-PIECE-SET - 3/8" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		7.165	8.661	3/8" FNPT	44.15	174	25	TB PSM202
		Equipped with a pressure gauge: 0 - 145 psi						


ALTO 2 - 2-PIECE-SET - 3/8" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET, DIVERTER BLOCK AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		9.213	8.661	3/8" FNPT	44.15	174	25	TB SME202
		Equipped with a pressure gauge: 0 - 145 psi 4 outlets for non lubricated air						

FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi Δp=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		2.165	8.661	3/8" FNPT	63.54	174	25	TM SM202
		Equipped with a pressure gauge 0 - 145 psi						

ALTO 2 - 3/8" FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		4.449	8.661	3/8" FNPT	63.54	174	25	TM PSM202
		Equipped with a pressure gauge: 0 - 145 psi						

ALTO 2


3/8" FNPT MODULES

Temperature
+41°F to +122°F


Construction
Body: Aluminum
Polycarbonate
bowl with metallic
protection

Equipped with
Manual drain

ALTO 2 - 3/8" FILTER AND MICRO FILTER


		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=4$ psi)	Max operating pressure (psi)	Filtration (μ m)	Part Numbers
		2.165	5.512	-	3/8" FNPT	79.42	174	25	TF 202

ALTO 2 - 3/8" REGULATOR


		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=14$ psi)	Operating pressure (psi)	Part Numbers
		2.165	5.315	-	3/8" FNPT	88.25	Inlet: 217 Outlet: 7-145	TR 202

Pressure gauge port size: G 1/8

ALTO 2 - 3/8" LUBRICATOR


		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=7$ psi)	Max operating pressure (psi)	Part Numbers
		2.165	6.181	-	3/8" FNPT	105.90	174	TL 202

ALTO 2 - 3/8" FILTER-REGULATOR

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=14$ psi)	Operating pressure (psi)	Filtration (μ m)	Part Numbers
		2.165	8.661	-	3/8" FNPT	63.54	Inlet: 174 Outlet: 7-145	25	TM 202

Outlet: 0.5-10 bar
Connection pressure gauge: G 1/8


ALTO 2 - DIVERTER BLOCK FOR OUTLETS WITHOUT OIL

		A (inch)	B (inch)	C (inch)	NPT female thread	Air outlet	Part Numbers
		2.598	1.378	2.087	3/8" FNPT	4 non-lubricated outlets	TE 202


ALTO 2

3/8" FNPT ACCESSORIES


ALTO 2 - WALL BRACKET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		2.165	1.102	1.693	(1) For filter or regulator 3/8" FNPT	TP Q2
		2.165	1.102	1.693	(2) For regulator or filter regulator 3/8" FNPT	TR Q2
		-	-	-	(3) Nut for regulator bracket	TR E2


ALTO 2 - 3/8" MODULE CONNECTOR KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.535	1.299	-	- 1 set TA M2 for a 3/8" FNPT 2-piece-set - 2 sets TA M2 for a 3/8" FNPT 3-piece-set	TA M2

ALTO 2 - 3/8" WALL MOUNTING BRACKET KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.535	3.504	2.756	- 1 set TA S2 for a 3/8" FNPT 2-piece-set - 2 sets TA S2 for a 3/8" FNPT 3-piece-set	TA S2


ALTO 2 - 3/8" MODULE CONNECTION

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.535	1.299	-	3/8" FNPT	TC P202


ALTO 2

3/8" FNPT ACCESSORIES

ALTO 2 - 3/8" MODULAR WALL MOUNT BRACKET

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.535	3.504	2.756	3/8" FNPT	TC S202

ALTO 2 - 3/8" AUTOMATIC FLOAT DRAIN

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		5.945	2.008	-	For filter: 3/8" FNPT	TD F2

FILTER ELEMENT ALTO 2

	A (inch)	B (inch)	C (inch)	Filtration (µm)	Part Numbers
	-	-	-	25	TF C2
	-	-	-	5	TF C205

MANUAL DRAIN BY DRAIN KNOB FOR FILTER OR FILTER-REGULATOR ALTO 1 - 2 - 3 - 4


	A (inch)	B (inch)	C (inch)	Description	Part Numbers
	-	-	-	For filters: 1/4" - 1/8" - 3/8" - 1/2" - 3/4" - 1" FNPT	TP F45

ALTO 3


1/2" FNPT AIR TREATMENT UNITS

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------


ALTO 3 - 3-PIECE-SET - 1/2" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		9.488	11.024	1/2" FNPT	123.54	174	25	TT SM203
		Equipped with a pressure gauge: 0 - 145 psi						


ALTO 3 - 3-PIECE-SET - 1/2" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		12.008	11.024	1/2" FNPT	123.54	174 psi	25	TT PSM203
		Equipped with a pressure gauge: 0 - 145 psi						

2-PIECE-SET - FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		6.142	11.024	1/2" FNPT	98.90	174	25	TB SM203
		Equipped with a pressure gauge: 0 - 145 psi						


ALTO 3 - 2-PIECE-SET - 1/2" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 100 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		8.661	11.024	1/2" FNPT	98.90	174 psi	25	TB PSM203
		Equipped with a pressure gauge: 0 - 145 psi						


ALTO 3

1/2" FNPT AIR TREATMENT UNITS


ALTO 3 - 2-PIECE-SET - 1/2" FILTER-REGULATOR-LUBRICATOR (GAUGE INCLUDED) WITH WALL BRACKET, DIVERTER BLOCK AND PIPE ADAPTERS

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		9.606	11.024	1/2" FNPT	98.90	174	25	TB SME203
		Equipped with a pressure gauge: 0 - 145 psi 4 outlets for non lubricated air						


2-PIECE-SET - 1/2" MICRO-FILTER ASSEMBLY WITH REGULATOR (GAUGE INCLUDED) AND WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=4psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		6.142	11.024	1/2" FNPT	52.95	174	5 and 0.01	TB CSM203
		Equipped with a pressure gauge (glass dial): 0 - 145 psi						

FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET


		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		2.756	11.024	1/2" FNPT	105.96	174	25	TM SM203
		Equipped with a pressure gauge 0 - 145 psi						

ALTO 3 - 1/2" FILTER-REGULATOR (GAUGE INCLUDED) WITH WALL BRACKET AND PIPE ADAPTERS


		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		5.276	11.024	1/2" FNPT	105.96	174 psi	25	TM PSM203
		Equipped with a pressure gauge: 0 - 145 psi						

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------


ALTO 3 - 1/2" FILTER-REGULATOR 280 PSI (GAUGE INCLUDED) WITH WALL BRACKET

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Filtration (μm)	Part Numbers
		2.638	12.992	1/2" FNPT	105.96	Inlet: 290 Outlet: 7-181	40	TM HPSM203
		Metallic vat without sight glass Equipped with a pressure gauge: 0 - 232 psi						

ALTO 3 - 1/2" REGULATOR WITH GAUGE

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Part Numbers
		1.575	3.189	1/2" FNPT	141.20	Inlet: 217 Outlet: 7-145	TR M203
		Equipped with a pressure gauge: 0 - 145 psi					


ALTO 3 - 1/2" HP REGULATOR WITH GAUGE

		A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Part Numbers
		2.795	6.299	1/2" FNPT	141.20	Inlet: 290 Outlet: 7-181	TR HPM203
		Equipped with a pressure gauge: 0 - 232 psi					


ALTO 3

1/2" FNPT MODULES


ALTO 3 - 1/2" FILTER AND MICRO FILTER

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=4$ psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
		2.756	6.772	-	1/2" FNPT	123.55	174	25	TF 203
		2.756	6.772	-	1/2" FNPT	123.55	174	0.01	TC 203


ALTO 3 - 1/2" REGULATOR

		A (inch)	B (inch)	C (inch)	NPT male thread	Flow rate (cfm at 87 psi $\Delta P=14$ psi)	Operating pressure (psi)	Part Numbers
		2.756	5.315	-	1/2" FNPT	141.20	Inlet: 217 Outlet: 7-145	TR 203
		Pressure gauge port size: G 1/8						

ALTO 3 - 1/2" LUBRICATOR


		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi $\Delta P=7$ psi)	Max operating pressure (psi)	Part Numbers
		2.756	7.48	-	1/2" FNPT	199.44	174 psi	TL 203

ALTO 3 - 1/2" FILTER-REGULATOR


		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 100 psi ΔP=14psi)	Operating pressure (psi)	Filtration (μm)	Part Numbers
		2.756	11.024	-	1/2" FNPT	105.96	Inlet: 174 Outlet: 0-145	25	TM 203
		2.756	11.024	-	1/2" FNPT	105.96	Inlet: 174 Outlet: 0-145	5	TM 20305
		Outlet: 7 psi - 145 psi Pressure gauge part size: G 1/8							

Temperature +41°F to +122°F	Construction Body: Aluminum Polycarbonate bowl with metallic protection	Equipped with Manual drain
--------------------------------	---	-------------------------------


ALTO 3 - 1/2" HP REGULATOR

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Max operating pressure (psi)	Part Numbers
		2.795	6.299	-	1/2" FNPT	141.20	Inlet: 217 Outlet: 7-181	TR HP203
		Pressure gauge port size: G 1/8						

ALTO 3 - 1/2" HP FILTER-REGULATOR

		A (inch)	B (inch)	C (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Filtration (μm)	Part Numbers
		2.756	12.992	-	1/2" FNPT	105.96	Inlet: 290 Outlet: 7-181	40	TM HP203
		Metallic vat without sight glass Pressure gauge part size: G 1/8							


ALTO 3 - 1/2" DIVERTER BLOCK FOR OUTLETS WITHOUT OIL

		A (inch)	B (inch)	NPT female thread	Air outlet	Part Numbers
		2.874	3.661	1/2" FNPT	4 non-lubricated outlets	TE 203


ALTO 3

1/2" FNPT AIR TREATMENT UNITS


ALTO 3 - 1/2" WALL BRACKET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		2.755	1.181	2.165	(1) For filter or lubricator 1/2" FNPT	TP Q3
		2.755	1.377	2.165	(2) For regulator or filter regulator 1/2" FNPT	TR Q3
		-	-	-	(3) Nut for regulator bracket	TR E3



ALTO 3 - 1/2" MODULE CONNECTION KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.89	1.732	-	- 1 set TA M3 for a 1/2" FNPT 2-piece-set - 2 sets TA M3 for a 1/2" FNPT 3-piece-set	TA M3


ALTO 3 - 1/2" WALL MOUNTING BRACKET KIT

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.89	4.291	3.543	- 1 set TA S3 for a 1/2" FNPT 2-piece-set - 2 sets TA S3 for a 1/2" FNPT 3-piece-set	TA S3


ALTO 3 - 1/2" - 3/4" MODULE CONNECTION

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.89	1.732	-	1/2" FNPT	TC P203
		2.953	2.165	-	3/4" FNPT	TC P3204

ALTO 3 - 1/2" - 3/4" MODULAR WALL MOUNT BRACKET

		A (inch)	B (inch)	C (inch)	NPT female thread	Part Numbers
		1.89	4.291	3.583	1/2" FNPT	TC S203
		2.953	4.291	3.583	3/4" FNPT	TC S3204

ALTO 3 - 4 - 1/2" - 3/4" - 1" AUTOMATIC FLOAT DRAIN

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		5.945	2.008	-	For filters 1/2" - 3/4" - 1" FNPT	TD F3

FILTER AND MICRO-FILTER ELEMENT ALTO 3

 	A (inch)	B (inch)	C (inch)	Filtration (µm)	Part Numbers
	-	-	-	(1) 25	TF C3
	-	-	-	(1) 5	TF C305
	-	-	-	(2) 0.01	TF C301

MANUAL DRAIN BY DRAIN KNOB FOR FILTER OR FILTER-REGULATOR ALTO 1 - 2 - 3 - 4

	A (inch)	B (inch)	C (inch)	Description	Part Numbers
	-	-	-	For filters: 1/4" - 1/8" - 3/8" - 1/2" - 3/4" - 1" FNPT	TP F45

ALTO 4


3/4" - 1" FNPT COMPRESSED AIR TREATMENT UNITS ...

Temperature
+41°F to +122°F

Construction
Body: Aluminum
Polycarbonate
bowl with metallic
protection


Equipped with
Manual drain

ALTO 4 - 3/4" - 1" FILTER 25 MM



A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=4psi)	Max operating pressure (psi)	Filtration (μm)	Part Numbers
3.543	10.236	3/4" FNPT	176	174	25	TF 204T
3.543	10.236	1" FNPT	229	174	25	TF 205T


ALTO 4 - 3/4" - 1" REGULATOR



A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Part Numbers
3.543	6.969	3/4" FNPT	176	Inlet: 217 Outlet: 7-145	TR 204
3.543	6.969	1" FNPT	211	Inlet: 217 Outlet: 7-145	TR 205


Pressure gauge port size: G 1/4

ALTO 4 - 3/4" - 1" LUBRICATOR



A (inch)	B (inch)	NPT female thread	Flow rate (cfm at 87 psi ΔP=7psi)	Max operating pressure (psi)	Part Numbers
3.543	10.748	3/4" FNPT	254	174	TL 204
3.543	10.748	1" FNPT	318	174	TL 205

ALTO 4 - 3/4" - 1" FILTER-REGULATOR




A (inch)	B (inch)	NPT female thread	Flow rate (Cfm at 87 psi ΔP=14psi)	Operating pressure (psi)	Filtration (μm)	Part Numbers
3.543	14.567	3/4" FNPT	150	Inlet: 174 Outlet: 7-145	25	TM 204
3.543	14.567	1" FNPT	194	Inlet: 174 Outlet: 7-145	25	TM 205

Pressure gauge thread size: G 1/4


ALTO 4

3/4" - 1" FNPT RANGE ACCESSORIES


ALTO 4 - 3/4" - 1" SEAL SET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.969	2.165	-	1 set TA M45 for 2 modules 2 sets TA M45 for 3 modules	TA M45


ALTO 4 - 3/4" - 1" WALL BRACKET AND SEAL SET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		2.008	4.921	3.819	1 set TA S45 for 2 modules 2 sets TA S45 for 3 modules	TA S45

ALTO 4 - 3/4" - 1" WALL BRACKET

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		3.543	1.85	2.559	(1) For filter and lubricator	TP Q45
		3.543	1.496	2.559	(2) For regulator or filter regulator	TR Q45


ALTO 4 - 3/4" - 1" QUICK CONNECTION KIT FOR INSTALLATION ON PIPE

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		1.89	1.772	-	Pipe adapter for 3/4" FNPT units	TC P204
		1.89	1.772	-	Pipe adapter for 1" FNPT units	TC P205

ALTO 4

3/4" - 1" FNPT RANGE ACCESSORIES

ALTO 3 - 4 - 1/2" - 3/4" - 1" AUTOMATIC FLOAT DRAIN

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		5.945	2.008	-	For filters 1/2" - 3/4" - 1" FNPT	TD F3

FILTER CARTRIDGE ALTO 4

	A (inch)	B (inch)	C (inch)	Filtration (µm)	Part Numbers
	-	-	-	25	TF C45
					

MANUAL DRAIN BY DRAIN KNOB FOR FILTER OR FILTER-REGULATOR ALTO 1 - 2 - 3 - 4

	A (inch)	B (inch)	C (inch)	Description	Part Numbers
	-	-	-	For filters: 1/4" - 1/8" - 3/8" - 1/2" - 3/4" - 1" FNPT	TP F45
					

AIR TREATMENT UNITS ON GANTRY


Temperature
+41°F to +122°F

Construction
Body: Aluminum
Polycarbonate
bowl with metallic
protection


Highlight
Easy to transport

Equipped with
Coupler and plug

COMBINATION FILTER-REGULATOR-LUBRICATOR TB SME203 WITH DIVERTER BLOCK, ON GANTRY

 	A (inch)	B (inch)	C (inch)	Interchange	Inlet 1 plug	Filtration (µm)	Outlet 3 couplings	Flow rate (cfm at 87 psi ΔP=8.7 psi)	Part Numbers
	11.929	16.417	-	Industrial 1/4"	IRP 06	25	2 x ISI 06 1 x ISI 06 (non lubricated outlet)	29.4	PTE IS
	11.929	16.417	-	Industrial 3/8"	IRP 08	25	2 x ISI 08 1 x ISI 08 (non lubricated outlet)	71.6	PTE IS8
	11.929	16.417	-	Automotive 1/4"	URP 06	25	2 x USI 06 1 x USI 06 (non lubricated outlet)	29.4	PTE US
	11.929	16.417	-	Automotive 3/8"	URP 08	25	2 x USI 08 1 x USI 08 (non lubricated outlet)	71.6	PTE US8
	11.929	16.417	-	High Flow 3/8"	ERP 07	25	2 x ESI 07 1 x ESI 07 (non lubricated outlet)	64.3	PTE ES
	11.929	16.417	-	ARO 210 1/4"	ARP 06	25	2 x ASI 06 1 x ASI 06 (non lubricated outlet)	28.3	PTE AS
Equipped with a pressure gauge: 0-145 psi Inlet pressure: 174 psi Outlet pressure: 7-145 psi									

COMBINATION MICRO FILTER - REGULATOR TB CSM203 (GAUGE INCLUDED) ALTO 3, ON GANTRY

 	A (inch)	B (inch)	C (inch)	Interchange	Inlet 1 plug	Filtration (µm)	Outlet 2 couplings	Flow rate (cfm at 87 psi ΔP=8.7 psi)	Part Numbers
	11.929	16.417	-	Industrial 1/4"	IRP 06	5 and 0.01	ISI 06	29.4	PTC IS
	11.929	16.417	-	Industrial 3/8"	IRP 08	5 and 0.01	ISI 08	53	PTC IS8
	11.929	16.417	-	Automotive 1/4"	URP 06	5 and 0.01	USI 06	29.4	PTC US
	11.929	16.417	-	Automotive 3/8"	URP 08	5 and 0.01	ISI 08	53	PTC US8
	11.929	16.417	-	High Flow 3/8"	ERP 07	5 and 0.01	ESI 07	64.3	PTC ES
	11.929	16.417	-	ARO 210 1/4"	ARP 06	5 and 0.01	ASI 06	28.3	PTC AS
Equipped with a solvent: 0-145 psi resistant glass gauge Inlet pressure: 174 psi Outlet pressure: 7-145 psi									

PAINTING

AIR TREATMENT UNITS ON GANTRY

Temperature
+41°F to +122°F

Construction
Body: Aluminum
Polycarbonate
bowl with metallic
protection

Highlight
Easy to transport

Equipped with
Coupler and plug

FILTER-REGULATOR-LUBRICATOR ALTO 4 WITH A NON-LUBRICATED OUTLET ON A GANTRY

		A (inch)	B (inch)	C (inch)	Interchange	Inlet 1 plug	Filtration (µm)	Outlet 3 couplings	Flow rate (cfm at 87 bar ΔP= 8.7 bar)	Part Numbers
		17.638	20.575	-	Automotive 1/2"	URP 11	25	2x USI 11 1x USI 06 (non lubricated outlet)	126	PTE LUS

Equipped with a pressure gauge 0-232 psi
Inlet pressure: 174 psi
Outlet pressure: 7-145 psi

WALL BRACKET FOR GANTRY

		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		10.079	2.48	7.165	Wall bracket	PT K


Wall bracket is suitable for 2 gantry models

SET OF 4 CASTERS FOR GANTRY


		A (inch)	B (inch)	C (inch)	Description	Part Numbers
		-	-	-	4 casters	PT RL

GAUGES

SQUARE GAUGE 1/8" MNPT


		A (inch)	B (inch)	C (mm)	Graduation (psi)	Fastening NPT male thread	Construction	Part Numbers
		1.575	1.85	14	0-58	1/8" MNPT	Plexiglas dial	MT CA0440T
		1.575	1.85	14	0-87	1/8" MNPT	Plexiglas dial	MT CA0640T
		1.575	1.85	14	0-145	1/8" MNPT	Plexiglas dial	MT CA1040T
		1.575	1.85	14	0-232	1/8" MNPT	Plexiglas dial	MT CA1640T

SQUARE GAUGE 1/8" MBSP

		A (inch)	B (inch)	C (inch)	Graduation (psi)	Fastening BSPP male thread	Construction	Part Numbers
		1.575	1.85	0.551	0-58	1/8" MBSP	Plexiglas dial	MT CA0440
		1.575	1.85	0.551	0-87	1/8" MBSP	Plexiglas dial	MT CA0640
		1.575	1.85	0.551	0-145	1/8" MBSP	Plexiglas dial	MT CA1040
		1.575	1.85	0.551	0-232	1/8" MBSP	Plexiglas dial	MT CA1640


Presealed back entry

ROUND GAUGE 1/8" MNPT

		A (inch)	B (inch)	C (inch)	Graduation (psi)	Fastening NPT male thread	Construction	Part Numbers
		0.866	0.906	-	0-174	1/8" MNPT	Plexiglas dial	MT RA1023T


Presealed back entry

ROUND GAUGE MNPT 1/4"

		A (inch)	B (inch)	C (mm)	Graduation (psi)	Fastening NPT male thread	Construction	Part Numbers
		1.969	1.693	14	0-58	1/4" MNPT	Plexiglas dial	MT RA0450T
		1.969	1.693	14	0-145	1/4" MNPT	Plexiglas dial	MT RA1050T
		1.969	1.693	14	0-363	1/4" MNPT	Plexiglas dial	MT RA2550T

Presealed back entry

GAUGE 1/8" MBSP

		A (inch)	B (inch)	C (inch)	Graduation (psi)	Fastening BSPP male thread	Construction	Part Numbers
		1.969	1.929	0.551	0 - 45	1/8" MBSP	Solvent resistant glass dial	MT IA1040V

Presealed back entry

23 Micro Air filters

Submicron filters **for compressed AIR**

MICRO AIR filters eliminate harmful agents in compressed air like solid particles, liquid particles and oil aerosols. With a filtration efficiency greater than **99.99%**, they guarantee high quality air with very little pressure loss.

■ IMPORTANT POINTS

- Deliver the level of filtration required for quality professional work.
- Extend the service life of the filter cartridges.
- Reduce pressure losses.
- Easy installation and maintenance.



■ HIGH-QUALITY FILTER MEDIA

The filter element consists of several components:

- The **pleated** main medium is made of HEPA-grade borosilicate glass microfiber and has a **filtration surface area 4.5 times larger than the one of conventional media**.
- Compared with conventional elements, it reduces pressure losses by 50% and offers 96% more retention capacity.
- The bowl guard is made of stainless steel.
- The polymer needle felt drainage sleeve ensures **complete coalescence** and is **highly resistant to compressor oils**.



■ EASY FILTER CARTRIDGE REPLACEMENT

- The nitrile gasket between the screw-on bowl and the end cap resists even the most aggressive chemicals.
- The shoulder inside the end cap prevents rotation and the insertion of elements of other shapes.
- Maximum safety: an audible alarm sounds if an attempt is made to remove the bowl under pressure.
- The molded aluminum housing and filter head are protected by a two-layer coating.

The combination of oil, dust and water in compressed air is extremely corrosive. These contaminants can damage air systems and pneumatic tools, and adversely affect the quality of work.

■ PATENTED VENTURI FILTER ELEMENT

- Specially designed nesting system allows turbulence free air to easily flow in and out of the filter.
- **Smoother air flows**
- **Steady flow rate**
- **Reduced pressure loss**
- The element rests inside the filter head.
- The nitrile seal guarantees an airtight push-fit connection, even when subjected to temperature variations or vibrations.
- The unique reinforced glass fiber end cap is color coded for easy identification of the element grade.
 - **White:** 1 μm filtration
 - **Green:** 0.01 μm filtration
 - **Black:** activated carbon



■ HIGH-ACCURACY PRESSURE GAUGES FITTED AS STANDARD

The pressure gauge indicates pressure loss and allows at-a-glance filter element condition checks.

The needle moves to the red area when the filter element is completely clogged and requires changing (pressure loss equivalent to at least 6 psi).

- **MPI 1** clogging indicator for 1/4" FNPT to 3/4" FNPT models
- **MPI 2** differential pressure gauge for 1" FNPT to 3" FNPT models



■ EFFICIENT AUTOMATIC CONDENSATE DRAINS

- **MPD** automatic float drain on 1/4" FNPT to 2" FNPT models
Bowl bottom port: female 1/8" FNPT



- **MPD X3** electric drain with capacitive sensor for 1/2" FNPT to 3" FNPT models
Bowl bottom port: female 1/2" FNPT
Allows condensates to drain without any loss of compressed air




MICRO AIR filters

■ QUICK ASSEMBLY AND FASTENING

- **MPA** assembly clamp

- Ensures quick, easy connection of filters in series
- Nitrile side gaskets guarantee leak free performance




- **MPK** wall bracket

- Quick and easy wall mounting of filter modules - One bracket required for one filter - Two brackets required for two or more filters

- **MTS 103** adapter for quick assembly

- MTS 103 adapters, installed on a filter using MPA assembly clamps, provide a leak proof attachment between the filter and the network.
- The adapters have a 1/2" FNPT thread on the network side and are compatible with filter sizes from 1/4" FNPT to 1/2" FNPT



Assemblies	MPA assemblies	MPK brackets
		
1/4" FNPT, 3/8" FNPT, 1/2" FNPT	MPA 1	MPK 1
3/4" FNPT, 1" FNPT	MPA 2	MPK 2
1 1/2" FNPT, 2" FNPT	MPA 3	MPK 3
2 1/2" FNPT, 3" FNPT	MPA 4	MPK 4

Filter types

Filter types	MFM filters Mechanical micro-filtration	MFB filters Submicron coalescing filtration	MFC filters Activated carbon - Adsorption filtration
Properties			
Particle size*	1 µm	0.01 µm	0.01 µm
ISO 8573-1:2009 air quality class	Solid particles: 2 Oil: 4	Solid particles: 1 Oil: 1	Solid particles: 1 Oil: 1
Residual oil concentration at 68°F and 1 bar absolute	2 mg/m³	< 0.01 mg/m³	< 0.004 mg/m³ (oil vapour)
Residual oil content in ppm	≤ 0.5 ppm	≤ 0.01 ppm	≤ 0.003 ppm
Minimum/maximum temperature	34°F to 150°F	34°F to 150°F	34°F to 150°F
Minimum working pressure 2 bar 2 bar 2 bar	30 psi	30 psi	30 psi
Maximum working pressure	232 psi 160 psi from 2 1/2" FNPT model	232 psi 160 psi from 2 1/2" FNPT model	232 psi 160 psi from 2 1/2" FNPT model
Inlet differential pressure: Δ P dry air Δ P moist air	0.6 psi 1.5 psi	0.6 psi 1.7 psi	1 psi —
Element color	White	Green	Black
Condensate drain	Automatic float drain Electric drain from 2 1/2" FNPT model	Automatic float drain Electric drain from 2 1/2" FNPT model	—
Filter element replacement	Replacement frequency*: 6000 hours or once a year Replace if 6 psi differential pressure registered	Replacement frequency*: 3000 hours or once a year Replace if 6 psi differential pressure registered	Replacement frequency*: 1000 hours or once a year Replacement with prefilter (at 68°F air inlet temperature)

*Liquid particles of 0.01 µm to 5 µm - Oil inlet concentration: 10 mg/m³

- The **Micro Air** line is tested and certified to **ISO 12500**.
- The stated values were measured in accordance with **ISO 12500 (parts 1, 2 and 3)**
- The air quality classes are those defined in **ISO 8573-1:2009**.

Correction factors:

The treated flow rates stated for the **MFM**, **MFB** and **MFC** ranges are for a system pressure of 101 psi. The correction factors to be applied for different pressures are given in the table below.

Pressure (psi/bar)	psig	20	30	40	60	80	100	120	150	200	250
	barg	1.4	2.1	2.8	4.1	5.5	6.9	8.3	10.3	13.8	17.2
Correction factor		0.30	0.39	0.48	0.65	0.82	1.00	1.17	1.43	1.87	2.31

MFM FILTERS

Mechanical micron filtration

The filter removes suspended particles, traps them in the filter media and directs them into the bowl to be drained.

- Automatic float drain on 1/4" FNPT to 2" FNPT models
- Electric drain with capacitive sensor on 2 1/2" FNPT to 3" FNPT models

MFM filter (1 µm):

- Traps all liquid and solid particles equal to or larger than 1µm.
- Removes over 99.999% of solid particles and over 80% of suspended oils.
- Ensures a residual oil content of less than 2 mg per m³ at 68°F and at atmospheric pressure. Oil concentration 0.5 ppm
- Quality classes
 - Particles: Class 2
 - Oil: Class 4



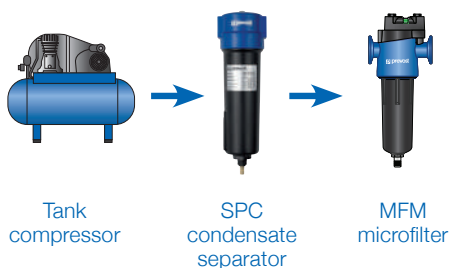
3/4" FNPT to 1" FNPT models

MFM microfilter applications

- Primary filter at the head-end of the system
- Post-filtration for adsorption dryers (dust filter)
- Prefiltration for submicron filters

APPLICATIONS

Typical standard workshops



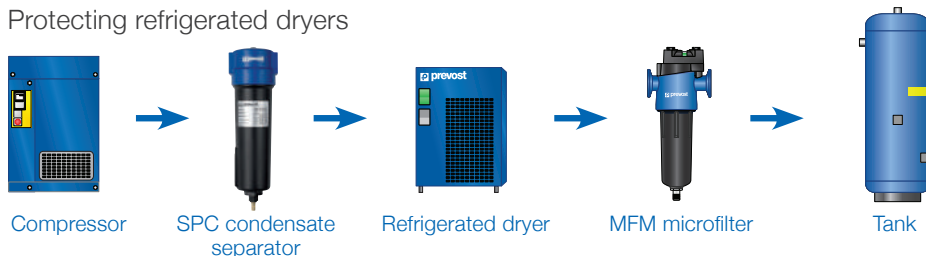
Standard small industry and auto repair workshops



MICRO AIR filters

■ APPLICATIONS

Protecting refrigerated dryers



■ MFB FILTERS

Submicron coalescing filtration

Coalescing filtration consists of two phases.

- In the first phase, contaminants are mechanically separated and solid particles of a particular size are trapped.
- In the second phase, molecules of oil and water suspended in the air flow are mixed together, or coalesced. This coalescence phase takes place in the sleeve, which discharges the mixture to the drain at the bottom of the filter.

→ Automatic float drain on 1/4" FNPT to 2" FNPT models

→ Electric drain with capacitive sensor on 2 1/2" FNPT to 3" FNPT models

MFB submicron filter (0.01 µm):

- Traps all liquid and solid particles larger than 0.01µm.
- Removes over 99.999% of solid particles and over 99.9% of suspended oils.
- Ensures a residual oil content of less than 0.01 mg per m³ at 68°F and at atmospheric pressure. Oil concentration 0.01 ppm
- Quality classes:
 - Particles: Class 1
 - Oil: Class 1



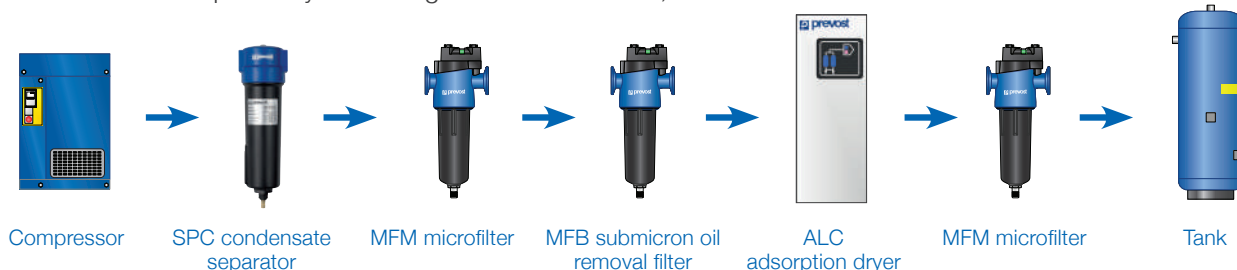
Model
3/4" FNPT to 1" FNPT

MFB submicron filter applications:

- Prefilter for membrane dryers
- Prefilter for activated carbon filters
- Prefilter for adsorption dryers
- Breathing air purification systems

■ APPLICATIONS

Protection of adsorption dryers/Storage of air free of dust, water and oil



■ MFC FILTERS

Activated carbon filtration

The activated carbon in the cartridge absorbs odors.

MFC filter:

- Traps solid particles larger than 0.01 μm .
- Ensures a residual oil content of less than 0.004 mg per m^3 (oil vapor) at 68°F and at atmospheric pressure. Oil concentration 0.003 ppm
- Eliminates odors carried by the air flow
- Quality classes:
 - Particles: Class 1
 - Oil: Class 1



Model
3/4" FNPT to 1" FNPT

A submicron coalescence prefilter must be fitted upstream of the activated carbon filter.

The activated carbon filter element must be changed when the submicron prefilter element is changed.

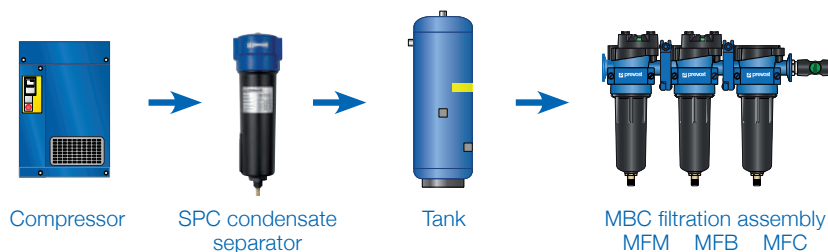
This filter does not remove methane, carbon monoxide, carbon dioxide and other toxic gases and vapors.

MFC activated carbon filter applications

- Contact with food products
- Contact with pharmaceutical products
- Air used for technical and testing purposes
- Air used for paint spraying (HVLP)
- Breathing air purification systems

■ APPLICATIONS

Paint and body shops



MICRO AIR filters

Special filtration systems for paint booth applications: **MBR - MBC - MBCR**

For a high quality paint finish air must be free of dust, oil and silicone.

■ SPECIAL FILTRATION ASSEMBLIES FOR WATER-BASED PAINT SPRAY GUNS

- Excellent filtration for high-quality paint finishes
- Contaminants flushed out by automatic float drain
- Items delivered in kit:
 - wall bracket
 - air outlet quick couplings

Depending on the model:

- pressure regulator with pressure gauge
- activated carbon filter



MBR

The regulator adjusts the pressure supplied to the gun. It is fitted with a pressure gauge with a glass dial for protection against damage from solvents or other diluents.

New, water based paints are highly sensitive to contaminants such as water, oil vapor and fine dust. Activated carbon filters are the best treatment for these contaminants and will reduce amounts to residual levels of 0.004 mg/m³ air.



MBCR



MBC

Assemblies with **prevoS1** couplings:

- Anti-static
- Non-scratch
- Lightweight, high flow
- Silicone-free
- Anti-hose whip
- ATEX

Available with the following profiles:

Industrial



High Flow



Automotive



To avoid any risk of contamination between the filters and the spray guns, install the **MBR** and **MBCR** filtration assemblies as close to paint booths as possible. They may be installed directly inside paint booths

MFM SERIES MICRONIC FILTER

Max operating
pressure
232 psi, 160 psi
for 1.1/2" to 3"


Temperature
+34°F to +150°F

Construction
Aluminum body
and bowl

Filtration
1 µm

Equipped with
Automatic float
drain

MICRON FILTER - FILTRATION THRESHOLD: 1 µm



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Female thread (NPT)	Flow rate (cfm at 100 psi)	Replacement filter cartridge	Part Numbers
4.472	8.091	6.748	2.992	1.181	1/4" FNPT	20	MFMC 101	MFM 1201
4.472	8.091	6.748	2.992	1.181	3/8" FNPT	35	MFMC 102	MFM 1202
4.472	9.921	8.52	2.992	1.181	1/2" FNPT	50	MFMC 103	MFM 1203
5.197	10.319	8.654	2.992	1.181	3/4" FNPT	75	MFMC 104	MFM 1204
5.197	10.319	8.654	2.992	1.181	3/4" FNPT	103	MFMC 105	MFM 1205
5.197	12.839	9.402	2.992	2.362	1" FNPT	157	MFMC 106	MFM 1206
7.874	13.256	10.87	2.992	2.362	1" 1/2 FNPT	257	MFMC 107	MFM 1207
7.874	17.075	14.689	2.992	2.362	1" 1/2 FNPT	360	MFMC 108	MFM 1208
7.874	22.283	19.898	2.992	2.362	2" FNPT	401	MFMC 109	MFM 1209
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	584	MFMC 110	MFM 1210
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	775	MFMC 111	MFM 1211
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	1029	MFMC 112	MFM 1212
9.087	32.169	28.846	2.992	2.362	3" FNPT	1199	MFMC 113	MFM 1213
9.087	42.72	39.398	2.992	2.362	3" FNPT	1499	MFMC 114	MFM 1214

Filtration threshold: 1 µm

REPLACEMENT CARTRIDGE FOR MICRONIC FILTERS - MFM SERIES

Filtration
1 µm

REPLACEMENT CARTRIDGE FOR MFM REGULAR FILTRATION 1 µm



Filter reference	Part Numbers
MFM 101	MFMC 101
MFM 102	MFMC 102
MFM 103	MFMC 103
MFM 104	MFMC 104
MFM 105	MFMC 105
MFM 106	MFMC 106
MFM 107	MFMC 107
MFM 108	MFMC 108
MFM 109	MFMC 109
MFM 110	MFMC 110
MFM 111	MFMC 111
MFM 112	MFMC 112
MFM 113	MFMC 113
MFM 114	MFMC 114

MFB SERIES SUB-MICRONIC FILTER

Max operating
pressure
232 psi, 160 psi
for 1.1/2" to 3"


Temperature
+34°F to +150°F

Construction
Aluminum body
and bowl

Filtration
0.01 µm

Equipped with
Automatic float
drain

MFB SUB-MICRONIC FILTER - COALESCING FILTER 0.01 µm



A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	Female thread (NPT)	Flow rate (cfm at 100 psi)	Replacement filter cartridge	Part Numbers
4.472	8.091	6.748	2.992	1.181	1/4" FNPT	20	MFBC 201	MFB 2201
4.472	8.091	6.748	2.992	1.181	3/8" FNPT	35	MFBC 202	MFB 2202
4.472	9.921	8.52	2.992	1.181	1/2" FNPT	50	MFBC 203	MFB 2203
5.197	10.319	8.654	2.992	1.181	3/4" FNPT	75	MFBC 204	MFB 2204
5.197	10.319	8.654	2.992	1.181	3/4" FNPT	103	MFBC 205	MFB 2205
5.197	12.839	9.402	2.992	2.362	1" FNPT	157	MFBC 206	MFB 2206
7.874	13.256	10.87	2.992	2.362	1" 1/2 FNPT	257	MFBC 207	MFB 2207
7.874	17.075	14.689	2.992	2.362	1" 1/2 FNPT	360	MFBC 208	MFB 2208
7.874	22.283	19.898	2.992	2.362	2" FNPT	401	MFBC 209	MFB 2209
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	584	MFBC 210	MFB 2210
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	775	MFBC 211	MFB 2211
9.087	24.976	21.654	2.992	2.362	2" 1/2 FNPT	1029	MFBC 212	MFB 2212
9.087	32.169	28.846	2.992	2.362	3" FNPT	1199	MFBC 213	MFB 2213
9.087	42.72	39.398	2.992	2.362	3" FNPT	1499	MFBC 214	MFB 2214

Filtration threshold: 0.01 µm

REPLACEMENT CARTRIDGE FOR SUB-MICRONIC FILTER - MFB SERIES

Filtration
0.01 µm

REPLACEMENT CARTRIDGE FOR MFB SUBMICRONIC FILTER - COALESCING FILTER: 0.01 µm



Filter reference	Part Numbers
MFB 201	MFBC 201
MFB 202	MFBC 202
MFB 203	MFBC 203
MFB 204	MFBC 204
MFB 205	MFBC 205
MFB 206	MFBC 206
MFB 207	MFBC 207
MFB 208	MFBC 208
MFB 209	MFBC 209
MFB 210	MFBC 210
MFB 211	MFBC 211
MFB 212	MFBC 212
MFB 213	MFBC 213
MFB 214	MFBC 214

MFC SERIES ACTIVATED CARBON FILTER


Max operating
pressure
232 psi, 160 psi
for 1.1/2" to 3"

Temperature
+34°F to +150°F

Construction
Aluminum body
and bowl

Filtration
Activated carbon
filter

MFC ACTIVATED CARBON FILTRATION

 	A (inch)	B (inch)	C (inch)	D (inch)	Female thread (NPT)	Flow rate (cfm at 100 psi)	Replacement filter cartridge	Part Numbers
	4.472	8.091	6.748	2.992	1/4" FNPT	20	MFCC 301	MFC 3201
	4.472	8.091	6.748	2.992	3/8" FNPT	35	MFCC 302	MFC 3202
	4.472	9.921	8.52	2.992	1/2" FNPT	50	MFCC 303	MFC 3203
	5.197	10.319	8.654	2.992	3/4" FNPT	75	MFCC 304	MFC 3204
	5.197	10.319	8.654	2.992	3/4" FNPT	103	MFCC 305	MFC 3205
	5.197	12.839	9.402	2.992	1" FNPT	157	MFCC 306	MFC 3206
	7.874	13.256	10.87	2.992	1" 1/2 FNPT	257	MFCC 307	MFC 3207
	7.874	17.075	14.689	2.992	1" 1/2 FNPT	360	MFCC 308	MFC 3208
	7.874	22.283	19.898	2.992	2" FNPT	401	MFCC 309	MFC 3209
	9.087	24.976	21.654	2.992	2" 1/2 FNPT	584	MFCC 310	MFC 3210
	9.087	24.976	21.654	2.992	2" 1/2 FNPT	775	MFCC 311	MFC 3211
	9.087	24.976	21.654	2.992	2" 1/2 FNPT	1029	MFCC 312	MFC 3212
	9.087	32.169	28.846	2.992	3" FNPT	1199	MFCC 313	MFC 3213
	9.087	42.72	39.398	2.992	3" FNPT	1499	MFCC 314	MFC 3214
Filters and deodorizes compressed air To use with MFM - MFB upstream								

REPLACEMENT CARTRIDGE FOR ACTIVATED CARBON FILTER - MFC SERIES


Filtration
Activated carbon
filter

REPLACEMENT CARTRIDGE FOR MFC ACTIVATED CARBON FILTRATION

	Filter reference	Part Numbers
	MFC 301	MFCC 301
	MFC 302	MFCC 302
	MFC 303	MFCC 303
	MFC 304	MFCC 304
	MFC 305	MFCC 305
	MFC 306	MFCC 306
	MFC 307	MFCC 307
	MFC 308	MFCC 308
	MFC 309	MFCC 309
	MFC 310	MFCC 310
	MFC 311	MFCC 311
	MFC 312	MFCC 312
	MFC 313	MFCC 313
	MFC 314	MFCC 314

MICRO AIR ACCESSORIES AND PARTS


MINI ELECTRONIC DRAINS

		A (inch)	B (inch)	C (inch)	Supply voltage	Operation	NPT female thread	Part Numbers
		3.228	1.496	-	110 V	Manual opening test	1/8" FNPT	TEMP MN115V

ASSEMBLY KIT FOR MICRO FILTERS

	A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
	-	-	-	For filters 1/4" to 1/2" FNPT	MPA 1
	-	-	-	For filters 3/4" to 1" FNPT	MPA 2
	-	-	-	For filters 1" 1/2 to 2" FNPT	MPA 3
	-	-	-	For filters 2" 1/2 to 3" FNPT	MPA 4
	-	-	-	Seal for MPA 1 assembly	MPA J1
	-	-	-	Seal for MPA 2 assembly	MPA J2
	-	-	-	Seal for MPA 3 assembly	MPA J3
	-	-	-	Seal for MPA 4 assembly	MPA J4

WALL BRACKET FOR MICRO FILTERS

		A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
		3.307	2.756	1.969	For filters: 1/4" to 1/2" FNPT	MPK 1
		3.976	3.189	1.969	For filters: 3/4" to 1" FNPT	MPK 2
		5.906	4.291	3.425	For filters: 1" 1/2 to 2" FNPT	MPK 3
		7.48	5.512	3.937	For filters: 2" 1/2 to 3" FNPT	MPK 4

FLOAT DRAIN FOR MICRO FILTERS



A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
-	-	-	For microfilters for 1/4" to 2" FNPT	MPD

SPARE PARTS: ELECTRIC DRAIN



A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
-	-	-	For filters: 2" 1/2 to 3" FNPT	MPD X3
-	-	-	Maintenance kit for Micro filter magnetic drain	MPD X3KIT

CLOG INDICATOR FOR MICRO FILTERS



A (inch)	B (inch)	C (inch)	Compatible with	Part Numbers
-	-	-	(1) Clogging indicator for filters: 1/4" to 3/4" FNPT	MPI 1
-	-	-	(2) Differential pressure gauge for filters: 1" to 3" FNPT	MPI 2

MICRO AIR COMBINATION FILTER / REGULATOR

Operating
pressure
29 to 174 psi

Temperature
+34°F to +150°F


Construction
Aluminum body
and bowl

Equipped with
Quick release
safety couplings
and adapters
prevoS1

COMBINATION FILTER REGULATOR



PAINTING




A (inch)	B (inch)	C (inch)	Interchange	Inlet NPT female thread	Outlet 1 coupling	Flow rate (cfm at 100 psi)	Part Numbers
12.323	12.992	4.016	Industrial 1/4"	1/2" FNPT	ISI 06	50	MBR 203IS
12.323	12.992	4.016	Automotive 1/4"	1/2" FNPT	USI 06	50	MBR 203US
12.323	12.992	4.016	High Flow 3/8"	1/2" FNPT	ESI 07	50	MBR 203ES

Combination fitted sealed with:

- 1 MFM micron filter - 1 µm
- 1 MFB sub-micron filter- 0.01 µm
- 1 regulator with gauge (glass dial)
- 1 safety quick coupling **prevoS1**
- 1 wall bracket

Filter-regulator unit eliminates silicon cratering, micro-bubbles and other surface defects to create professional quality paint finishes.

COMBINATION SUBMICRON FILTERS

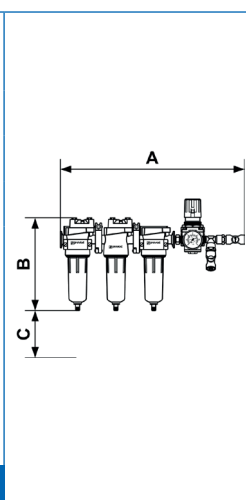


PAINTING

A (inch)	B (inch)	C (inch)	Interchange	Inlet NPT female thread	Outlet 1 coupling	Flow rate (cfm at 100 psi)	Part Numbers
12.323	12.992	4.016	Industrial 1/4"	1/2" FNPT	ISI 06	50	MBC 203IS
12.323	12.992	4.016	Automotive 1/4"	1/2" FNPT	USI 06	50	MBC 203US
12.323	12.992	4.016	High Flow 3/8"	1/2" FNPT	ESI 07	50	MBC 203ES
Combination fitted sealed with: - 1 MFM micron filter - 1 µm - 1 MFB sub-micron filter- 0.01 µm - 1 MFC activated carbon filter - Oil separation: 0.004 mg/m³ - 1 wall bracket - 1 Safety quick-coupling prevoS1 Filter-regulator unit eliminates silicon cratering, micro-bubbles and other surface defects to create professional quality paint finishes.							

COMBINATION SUB-MICRONIC FILTERS





A (inch)	B (inch)	C (inch)	Interchange	Inlet NPT female thread	Outlet 2 couplings	Flow rate (cfm at 100 psi)	Part Numbers
12.323	12.992	4.016	Industrial 1/4"	1/2" FNPT	ISI 06	50	MBCR 203IS
12.323	12.992	4.016	Automotive 1/4"	1/2" FNPT	USI 06	50	MBCR 203US
12.323	12.992	4.016	High Flow 3/8"	1/2" FNPT	ESI 07	50	MBCR 203ES

Combination fitted sealed with:

- 1 MFM micron filter - 1 µm
- 1 MFB sub-micron filter- 0.01 µm
- 1 MFC activated carbon filter - Efficiency: 99.999 %
- Oil separation: 0.004 mg/m³
- 1 regulator with gauge (glass dial)
- 1 wall bracket
- 2 safety quick-couplings **prevoS1**

Filter-regulator unit eliminates silicon cratering, micro-bubbles and other surface defects to create professional quality paint finishes.

PAINTING

24

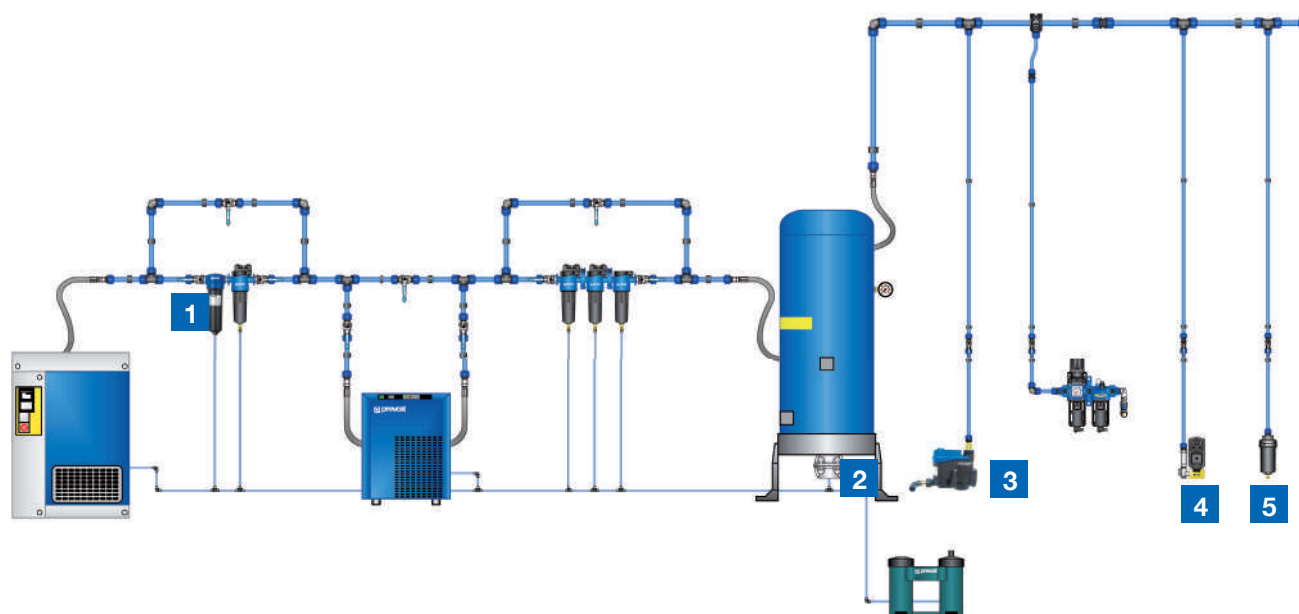
Separators and drain systems

Separators

Condensates collected by filtration or separation within the air network should be released quickly and effectively to avoid contaminants in the system that negatively affect the air tools.

Drains offer an effective solution for releasing waste.

The type of drain used is dependent on the scale of the network, the location to be equipped and the accessibility of the air line.



It is essential to install drains for effective compressed air filtration.
A properly equipped network will efficiently power pneumatic tools and enhance work performance.

Separators and **drain systems**

1 Automatic drain cyclone separator **SPC**

■ LOCATION

Compressor outlet, tank outlet, prefilter for refrigerated dryers or submicron filters.

■ OPERATION

The cyclone separator is designed for the efficient separation and elimination of the largest solid particles as well as water droplets in compressed air.

Inside the tank, a fin system drives the compressed air in a rotational movement.


Particulate matter is projected against the walls of the tank, under the effect of centrifugal force, then guided towards the base.

Condensates are then drained via the automatic float drain.



■ ADVANTAGES

- Dual action: separation and discharge.
- Possible high inlet temperature.
- Sturdy construction.
- Advantages of float drains.
- Cost-effective and dependable operation.



Optional: wall mounting kit,
part number SPC K

■ TECHNICAL SPECIFICATIONS

Applications for flow rates from 91 to 753 cfm and for all industries.

Operating pressure 0 to 232 psi

Temperature +34°F to 149°F

Body construction..... Anodized aluminum

External coating ... Polyester-based epoxy paint

Tank gasket material NBR

Cyclone component PA6 30% glass fiber, steel

Separation: Greater than 98% at nominal flow rate and at 100 psi, temperature 68°F, particle size from 10 µm to 60 µm.

Classification according to ISO 8573-1

Water: Class 8

2 Magnetic float drain - PMA 201T

■ LOCATION

Low points, filter tanks of all kinds.

■ OPERATION

Condensates are automatically drained via a magnetic valve.

When a certain water level is reached, the float opens the magnetic valve.

Once the water has been discharged, the float falls and closes the valve.

■ ADVANTAGES

- No loss of compressed air
- No electrical power supply
- No adjustment
- Servicing limited to simple cleaning
- High discharge capacity
- Corrosion-resistant aluminum body
- No risk of condensates forming an emulsion

■ TECHNICAL SPECIFICATIONS

Inlet connection 1/2" FNPT

Outlet connection 1/8" FNPT

Max. working temp. 122°F

Min. working temp. 37°F

Max. operating temperature212°F

Max. operating pressure232 psi

Clearance 0.08"

Body material: corrosion-resistant aluminum



3 Electromagnetic drain valve - **PDE 100T**

■ LOCATION

Dryers, separators, low points on networks

■ OPERATION

When the level of contaminants reaches a certain height within the bowl, the drain float reaches its top position and sends a magnetic pulse to the control valve (electrical control) which opens, draining the condensates without any loss of compressed air. The outlet closes once draining is complete.



■ ADVANTAGES

- No loss of compressed air and no turbulence during condensate draining.
- Treatment of condensates for decantation.

The PDE 100 drain is supplied with a male/male equal union and a pushfit fitting for connection of an 8 mm (0.31") polyamide tube (allows immediate connection of a drain hose).

■ TECHNICAL SPECIFICATIONS

Air inlet connection: . 1/2" FNPT male coupling

Condensate drain connection:.....

Push-fit fittingfor 8 mm (0.31")
polyurethane or polyamide tubing

Temperature 36°F to 140°F

Operating pressure 3 to 232 psi

Power supply voltage...230 V AC (50/60 Hz)

Protection ratingIP 65

Discharge capacity 1.35 gal/h

Separators and drain systems

4 Timed electric drain - TEMP

LOCATION

Low points, compressor tanks, dryers, separators, filters.



OPERATION

Equipped with a timer and a solenoid valve, the timed electric drains open and discharge accumulated contaminants based on an adjustable time switch.

ADVANTAGES

Depending on the degree of contamination and humidity in the atmosphere:

- Choice of drain valve opening time
- Choice of drain valve opening frequency
- Compact assembly
- Can be integrated in all positions at all points of use

TECHNICAL SPECIFICATIONS

Interval duration	0.5 - 45 minutes
Discharge time	0.5 - 10 seconds
Voltage options	24 - 240 V AC/DC
.....	50-60 Hz (± 10%)
Timer housing	ABS plastic FR classified
Connection	DIN 43650A / ISO 4400
Indicators	LED (yellow) ON/OFF
Valve type	2/2 - directly controlled
Max. pressure	232 psi
Min./max. temp.....	35°F to 134°F ambient
Max. fluid temperature	194°F
Brass solenoid valve, port	5/32"
Coil insulation	Degree -H
Environmental protection	IP65



5 Float drain - PAM 203

LOCATION

Low points, line ends.

OPERATION

Depending on the water level in the drain bowl, the float raises and opens the bowl. Once the condensates have drained, the float lowers and closes the port.



ADVANTAGES

- Automatic, standalone drain
- No loss of compressed air
- Discharge of impure water (oil)
- Sturdy construction

TECHNICAL SPECIFICATIONS

Min./max. working pressures	29 to 174 psi
Min./max. temperature	35°F to 136°F
Inlet connection	1/2" FNPT
Drain outlet	5/16"
Bowl capacity	4 Oz
Bowl and cover material	Zinc
Max. temperature	212°F
Clearance	0.08"

PROGRAMMABLE ELECTRONIC DRAINS

Operating
pressure
0 to 232 psi

ID Passage
5/32"


Temperature
+35°F to +131°F

Drain cycle
0.5 - 45 min


Drain opening
0.5 - 10 sec

Supply voltage
24 - 220 V
50/60 HZ


ECONOMY SERIES COMPLETE AUTOMATIC DRAIN VALVE KIT

		A (inch)	B (inch)	Inlet NPT male thread	Outlet NPT female thread	Supply voltage	Part Numbers
		-	-	3/8" FNPT	3/8" FNPT	110 V - 50/60 Hz	TEMP 202115COLS
		Includes: - Programmable timer - Solenoid for evacuating condensates - Drain trap with 1/4 turn shut-off valve - ID passage: 5/32" - Temperature: +35°F to +131°F - Drain opening: 0.5-10 sec - Drain cycle: 0.5-45 min					


MINI ELECTRONIC DRAINS

		A (inch)	B (inch)	Supply voltage	Operation	NPT female thread	Part Numbers
 		3.228	1.496	110 V	Manual opening test	1/8" FNPT	TEMP MN115V

PARTS FOR PROGRAMMABLE ELECTRONIC DRAIN

		A (inch)	B (inch)	Description	Fastening NPT male thread	Part Numbers
 	1	1.614	2.087	(2) Coil	110V-50/60 Hz	BOB 110VA
	2	3.15	1.575	(3) Solenoid	1/4" FNPT	ELV 201
	3	3.15	1.575	(3) Solenoid	3/8" FNPT	ELV 202
	4	3.15	1.811	(3) Solenoid	1/2" FNPT	ELV 203
	5	3.858	2.362	(4) Impurity collector	1/2" MNPT x 3/8" MNPT	COL 253252
		1.771	0.984	(5) Power connector		TEMP CONNECT

ELECTRIC DRAIN VALVE W/ FLOAT AND PILOT VALVE

		A (inch)	B (inch)	Inlet NPT male thread	Outlet Ø	Removal capacity (gal/h)	Operating pressure (psi)	Protection rating	Supply voltage (V)	Temperature	Description	Part Numbers	
		-	-	-	-	-	-	-	-	-	-	Repair kit for PDE 100 automatic drain	PDE 100KR
		6.102	4.803	1/2" MNPT	Ø 8 mm	1.35	3-232	IP 65	115 AC (50/60Hz)	36 - 140° F		PDE 100T	
Meets Pressure Equipment Directive 2014/68/CE													

WATER SEPARATOR


Max operating
pressure
232 psi

Temperature
+34°F to +149°F

Construction
Anodized
Aluminum


Equipped with
Automatic float
drain

CYCLONIC WATER SEPARATOR W/ FLOAT DRAIN



A (inch)	B (inch)	C (inch)	D (inch)	Female thread (NPT)	Flow rate (cfm)	Part Numbers
7.362	3.465	0.787	2.362	1/2" FNPT	91	SPC 155T
10.118	3.465	0.787	3.15	3/4" FNPT	138	SPC 235T
10.354	4.921	1.26	3.937	1" FNPT	215	SPC 365T
18.15	4.921	1.26	5.512	1" 1/2 FNPT	452	SPC 770T
26.929	6.417	1.693	20.472	2" FNPT	753	SPC 1280T

WALL BRACKET FOR SPC SEPARATOR



A (inch)	B (inch)	C (inch)	D (inch)	Compatible with	Part Numbers
5.984	1.575	-	-	SPC 155T - SPC 235T	SPC Q1
7.441	2.52	-	-	SPC 365T - SPC 770T - SPC 1280T	SPC Q2

DRAIN FOR SPC




A (inch)	B (inch)	C (inch)	D (inch)	Description	Part Numbers
-	-	-	-	Drain for SPC	SPC D

MECHANICAL DRAIN VALVES

Temperature
+32°F to +176°F


AUTOMATIC MECHANICAL DRAIN VALVE

		A (inch)	B (inch)	C (mm)	NPT female thread	Drain outlet (in)	Operating pressure (psi)	Part Numbers
		5.236	2.087	1 - 1/8	1/2" FNPT	5/16"	29 to 174	PAM 203

FLOAT FOR MECHANICAL DRAIN VALVE

	A (inch)	B (inch)	C (inch)	Description	Part Numbers
	-	-	-	Float drain for PAM 203 drain valve	PAM FLO

MANUAL DRAIN

		A (inch)	B (inch)	C (inch)	BSPP male thread	NPT male thread	Part Numbers
		0.906	0.591	-	1/4" MBSP		MA 14
		0.906	0.551	-		1/4" MNPT	MA 14T

MA 14 = used on the WK manifolds
MA 14T = used on the MF manifolds


MAGNETIC DRAIN

Max operating
pressure
232 psi

Temperature
+35°F to +122°F

Construction
Body: Aluminum

MAGNETIC DRAIN CONDENSATE DRAINING

		A (inch)	B (inch)	Inlet NPT female thread	Drain outlet (in)	Condensates draining	Part Numbers
		5.709	4.134	2 connections 1/2" FNPT	1/16"	52.8 gal/hour	PMA 201T

Condensates are automatically drained by a magnetic valve.
The valve opens when a float inside reaches a certain level and closes when the float drops back down.
Zero air loss.
No electricity required.

Technical manual



A/ **COMPRESSED** AIR

B/ **COMPRESSED** AIR NETWORKS

C/ AIR TREATMENT/**FILTRATION**



D/ PAINTING **APPLICATIONS**

E/ PIPE **DIAMETER**



F/ FLOW RATES AND **PRESSURE LOSS**

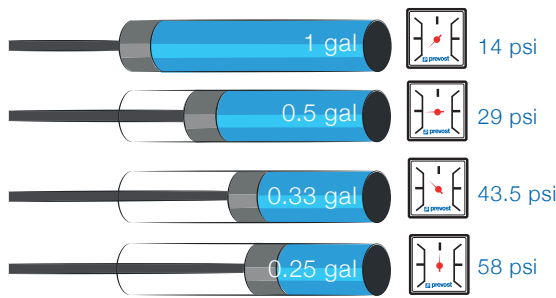
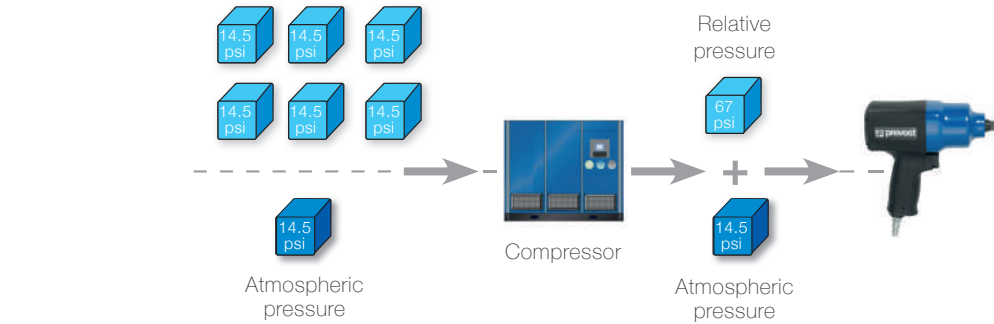
G/ STANDARDS AND **DIRECTIVES**

H/ CONVERSION **TABLES**

A

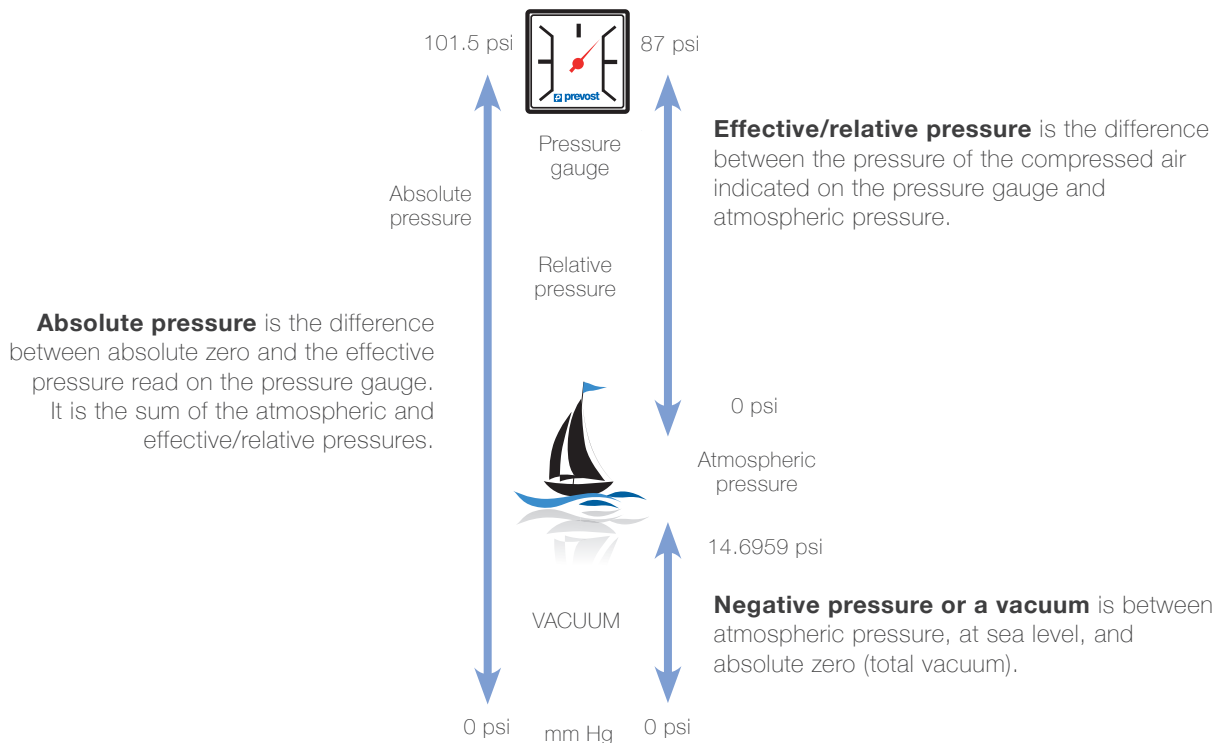
Compressed air

■ WHAT IS COMPRESSED AIR?



The compression of air generates a transformation determined by the laws of thermodynamics. Boyle's law states that if a volume of gas (air) is reduced by compression, the pressure increases proportionally.


■ THE DIFFERENT LEVELS OF PRESSURE



Compressed air

■ WHAT IS THE DEW POINT?

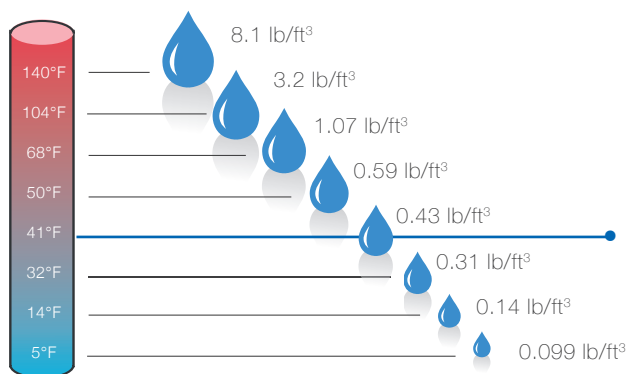
A given amount of air has a certain holding capacity for water vapor. After the holding capacity is reached, the additional water begins to condense and form a liquid. As temperatures increase, the holding capacity increases and more water can be held in the air as vapor. When temperatures decrease, the water will condense and form liquid.



At 5°F, 1 ft³ of air at atmospheric pressure can hold 0.099×10^{-3} lb/ft³ of water vapor, any excess amount will condense.
Example: At the North Pole, the air is dry because the water it contained froze at ground level. This is **condensation**.



At 140°F, 1 ft³ of air at atmospheric pressure can hold 8.1×10^{-3} lb/ft³ of water vapor. After that point, any excess will evaporate.
Example: In the desert, the air is so hot and dry it can hold an excessive amount of water. This is called **evaporation**.

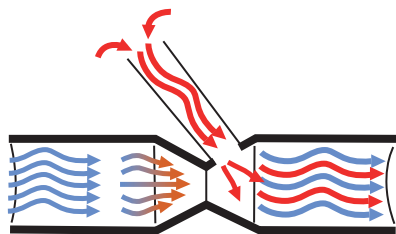


The **dew point** is when the air becomes saturated with water and droplets begin to condense and form a liquid.

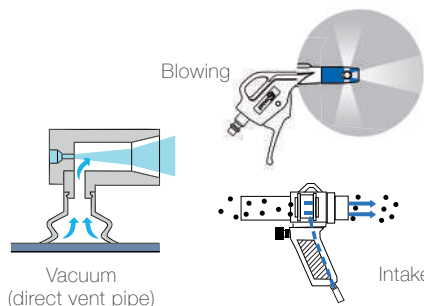
Maximum quantity of water (59 °F) vapor that cannot be contained in 1 ft³ of air at atmospheric pressure and with 100% relative humidity.

■ WHAT IS THE VENTURI EFFECT?

The **Venturi effect** named after Italian physicist Giovanni Battista Venturi, is a fluid dynamics phenomenon where the movement of gas or liquid particles accelerates due to a reduction of the size of the pipe through which it is traveling. The Bernoulli principle helps to explain this effect: if the fluid flow rate is constant and the diameter is reduced, the speed then increases which creates a decrease in pressure.



Venturi effect: at the outlet from the constriction, the acceleration of the air creates a decrease in pressure. The pressure drop pulls in external air and is added to the original air flow. The additional air is supplied via a lateral pipe.



In pneumatics, the **Venturi effect** is used to increase blowing, generate a vacuum or draw in dust from the environment.

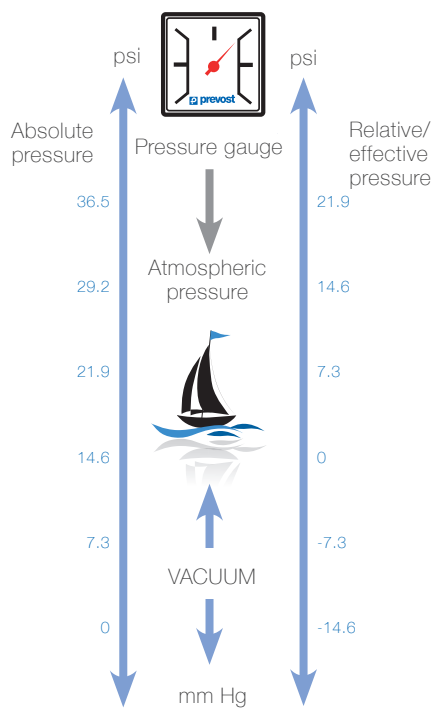
■ WHAT IS A VACUUM?

When air becomes thin or less dense, it forms a vacuum. By removing air from an enclosed space, a negative pressure (or vacuum) is created relative to the atmospheric pressure.

The level of vacuum can be expressed as:

- Level of negative pressure as a relative pressure value, in relation to the atmospheric pressure
- Level of vacuum as an absolute value (defined relative to absolute zero)

The standard unit used for a vacuum is the millimeter of mercury (mm Hg). A vacuum is commonly expressed in mbar or as a percentage.

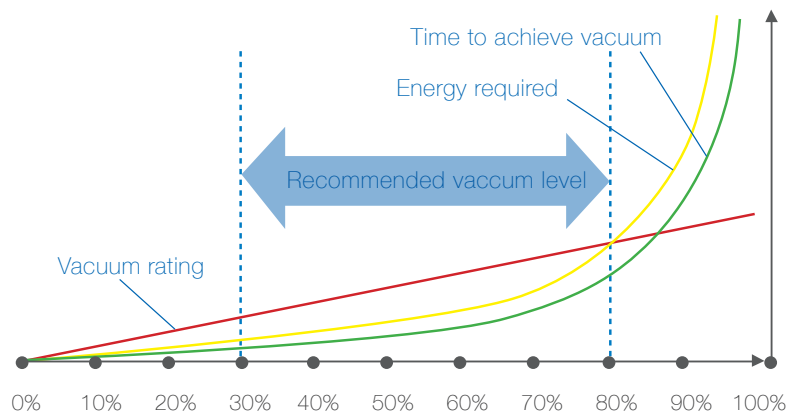


mm Hg	vacuum	mm Hg
750	0 %	0
675	10 %	75
600	20 %	150
525	30 %	225
450	40 %	300
375	50 %	375
300	60 %	450
225	70 %	525
150	80 %	600
75	90 %	675
0	100 %	750

The table above shows the correlation between pressures expressed in bar or mbar and the vacuum as a percentage.

Note: The relative or effective pressure corresponds to the reading on the pressure gauge, located on the tool or machine.

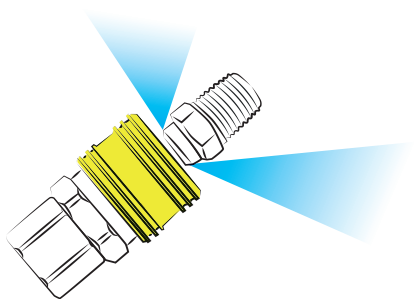
There is a tendency to think that the greater the vacuum, the better the result. However, the cost-efficiency ratio must also be taken into account. In doing so, it is determined that the best results are achieved when the vacuum is between 30% and 80%. In general, these are the values applied in the industrial sector.



Compressed air

■ HOW MUCH DOES A COMPRESSED AIR LEAK COST?

Leak in cfm		Diameter of leak in inch					
		0.02	0.04	0.08	0.12	0.16	0.20
Compressed air pressure in psi	15	0.12	0.47	2.00	4.53	8.59	15.18
	90	0.41	1.82	8.47	19.12	34.00	53.12
	100	0.59	2.41	9.71	21.88	38.88	60.71
	120	0.71	2.71	10.94	24.59	43.71	68.29
	150	0.76	3.06	12.12	27.29	48.59	75.88
	175	0.82	3.35	13.35	30.60	53.41	83.47
	200	1.00	3.94	15.76	35.53	63.12	98.65



One leaking coupling represents on average an opening of 0.02 inch
At 100 psi, this corresponds to a leak of 0.59 cfm
The energy cost of 100 cfm of compressed air is 0.008 USD

For 1 hour = 0.008 USD
For 8 hours = 0.064 USD
For 24 hours = 0.20 USD
For 1 year = 70.98 USD

B

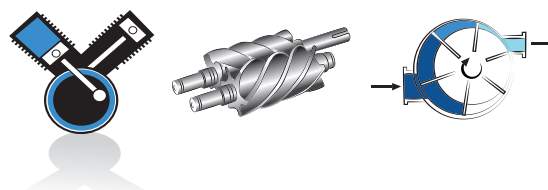
Compressed air networks

■ NETWORK DESIGN CHECKLIST

The topics below must be considered during an initial site visit for a new installation or network.

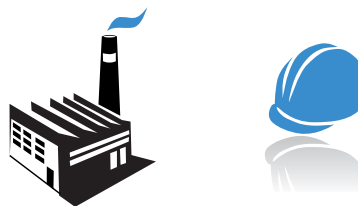
COMPRESSOR(S)

- Piston, screw, vane or other
- Power (HP)
- Pressure (psi)
- One or several compressors
- If several, working together or separately?
- Age of compressor(s)



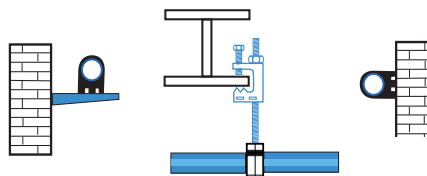
ACTIVITY

- Business area or industry
- Number of operators using the network
- Future plans to expand workforce
- Type of pneumatic applications being used



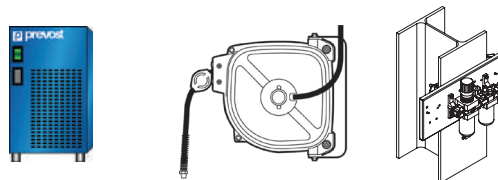
BUILDING

- Length of the main line (on site or on diagram)
- Type of bracket
- Hard to access areas
- Maximum ambient temperature
- Minimum ambient temperature
- Plans to expand the building, thus increasing the network



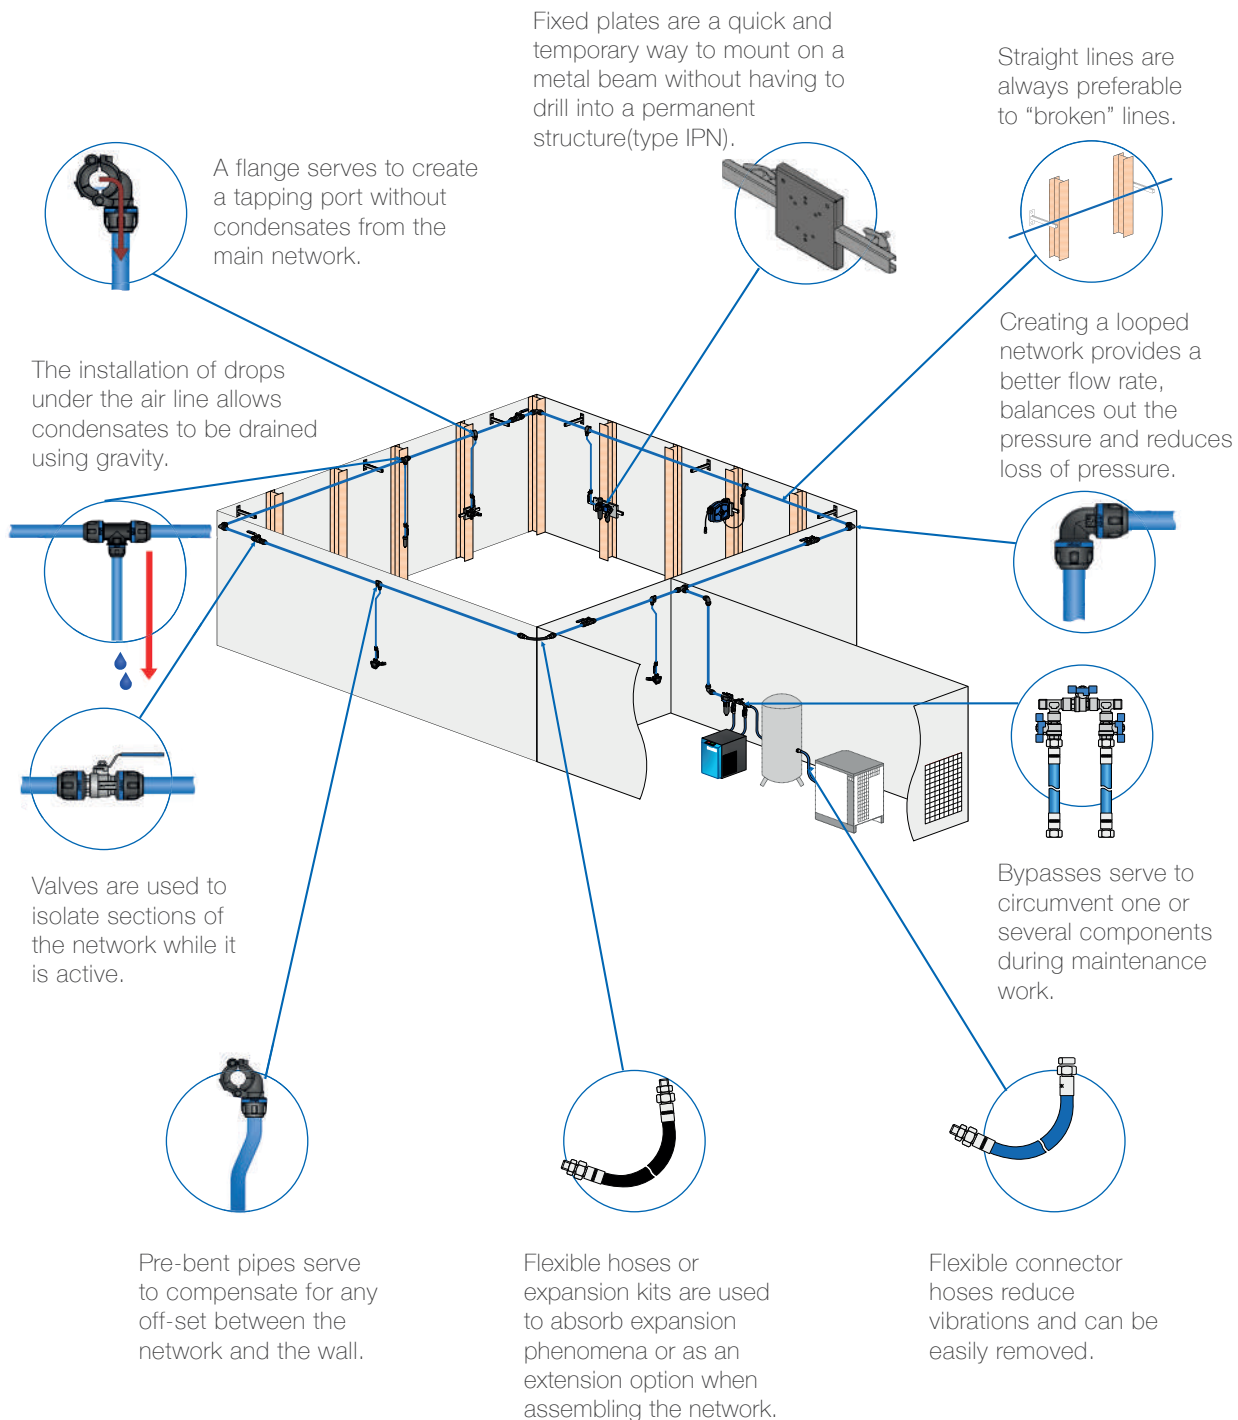
OPTIONS

- Dryers
- Hose reels
- Plates
- Additional accessories



Compressed air networks

■ GUIDELINES FOR INSTALLING A PREVOST COMPRESSED AIR NETWORK



PIPE SELECTION FOR COMPRESSED AIR NETWORKS

Before undertaking any compressed air network calculations, you must first choose the type of pipe material.



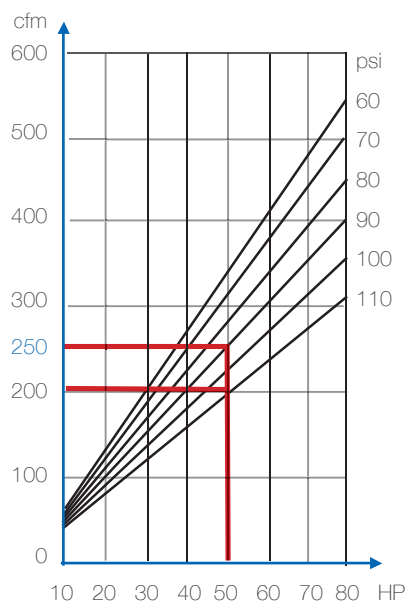
Advantages and/or disadvantages for each type of material

	Steel	Galvanized Steel	Copper	Alu	Stainless Steel (SST)
Air quality	Not recommended	Not recommended	Acceptable	Recommended	Recommended
Pressure loss	Not recommended	Not recommended	Recommended	Recommended	Recommended
Fast installation	Not recommended	Not recommended	Not recommended	Recommended	Not recommended
Easy installation	Not recommended	Not recommended	Not recommended	Recommended	Not recommended
Installation tools	Not recommended	Not recommended	Not recommended	Recommended	Not recommended
Disassembly	Not recommended	Not recommended	Not recommended	Recommended	Not recommended
Weight	Not recommended	Not recommended	Acceptable	Recommended	Acceptable
Anti-corrosive	Not recommended	Not recommended	Acceptable	Recommended	Recommended
Fire resistance	Recommended	Recommended	Recommended	Recommended	Recommended
Crush proof	Recommended	Recommended	Acceptable	Acceptable	Acceptable
Standardized color	Not recommended	Not recommended	Not recommended	Recommended	Not recommended

Not recommended Acceptable Recommended

COMPRESSOR FLOW RATE CALCULATIONS

To calculate the flow rate of a compressor, multiply the motor power rating in kW by 10. This gives the air flow in m³/h (at 100 psi).



Example:

A 50 HP compressor produces a flow rate of 50 cfm at 90 psi.

Note that the greater the pressure, the lower the flow rate.

The same compressor produces a flow rate of less than 200 cfm at 110 psi.

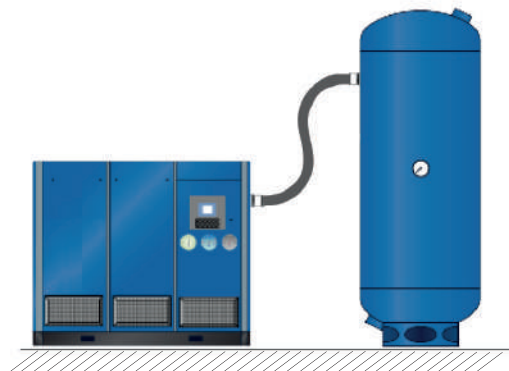


$$\text{HP} \times 4.5 = \text{cfm}$$

Low pressure is a common problem in air systems but increasing the pressure is not the solution. Often times, the network design is the problem. A few reasons why low pressure occurs is: the pipe diameter is too small, too many elbows, pipes are clogged by rust, network not looped, etc. (See Flow rates and pressure loss).

Compressed air networks

■ DETERMINING TANK VOLUME



If the tank is too big, the compressor is operating infrequently and for longer time frames.

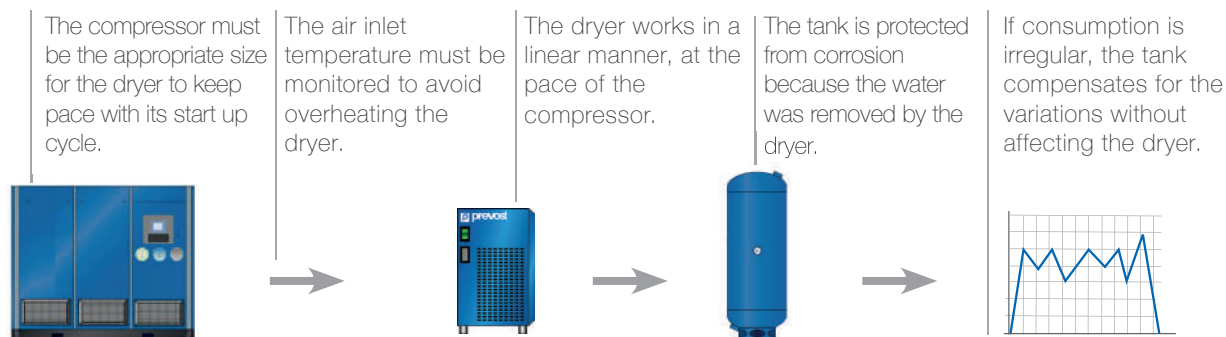
If the tank is too small, the compressor will operate more frequently and for shorter time frames.

Compressor power	*Air flow from compressor		*Recommended tank volume		
	kW/Cv	cfm	m³/h	cu ft	gal
18/25		106	180	11	80
30/40		206	350	16	120
45/60		294	500	32	240
75/100		441	750	53	400
90/125		589	900	53	400
132/175		883	1500	88	660
160/215		1030	1750	88	660
200/270		1177	2000	142	1060

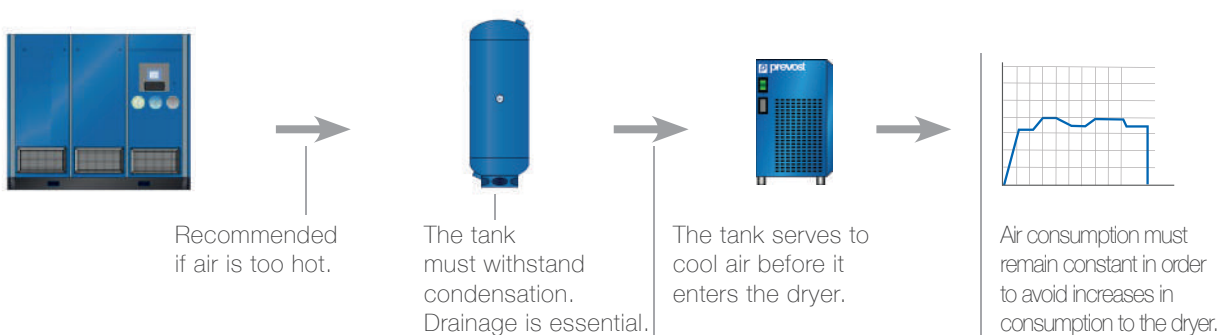
*These values may differ slightly from the data provided by compressor manufacturers.

■ WHERE SHOULD A DRYER BE INSTALLED?

Dryer located upstream of the tank

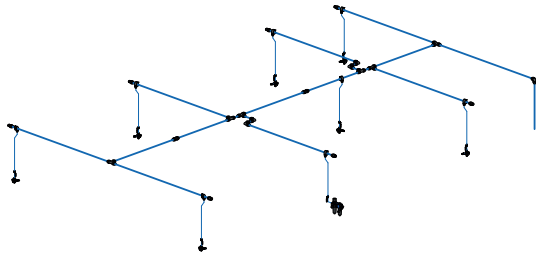


Dryer located downstream of the tank



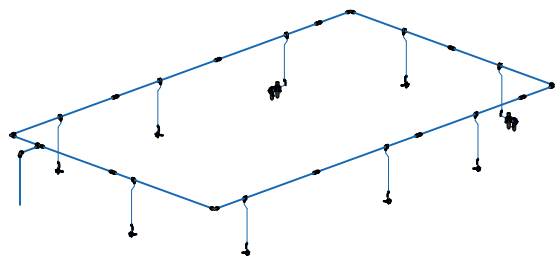
■ TYPES OF COMPRESSED AIR PIPING NETWORK

Bypass network



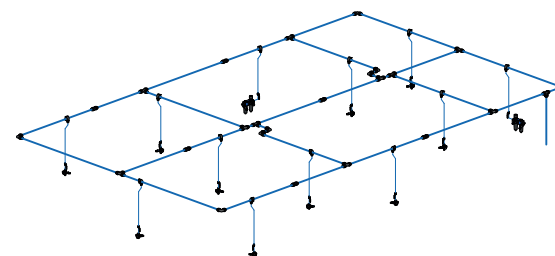
- The main line must be long to achieve adequate air flow.
- Drops must also have a larger diameter due to their greater length.
- No possibility of isolating a section.

Looped network



- Provides equivalent air flow and pressure at all points in the network.
- Smaller sections of pipe are required.
- Opportunity to isolate a section using valves.
- Recommended system for all industry applications.

Crossed network (meshed)



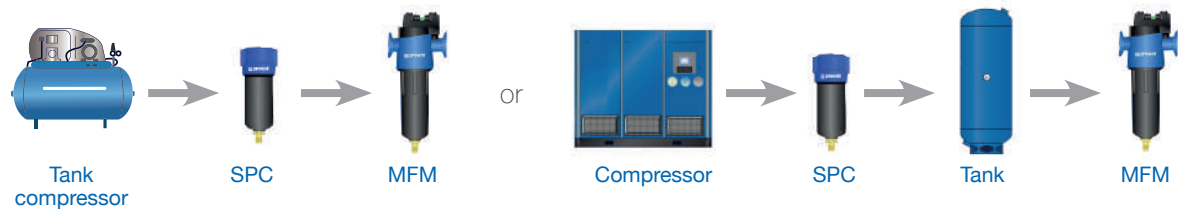
- Provides equivalent air flow and pressure at all points in the network.
- Smaller sections of pipe are required.
- Opportunity to isolate a section using valves.
- Recommended for large companies.

C

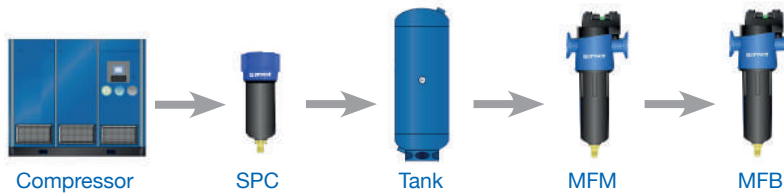
Air treatment & filtration

■ EXAMPLES OF AIR TREATMENT SYSTEMS

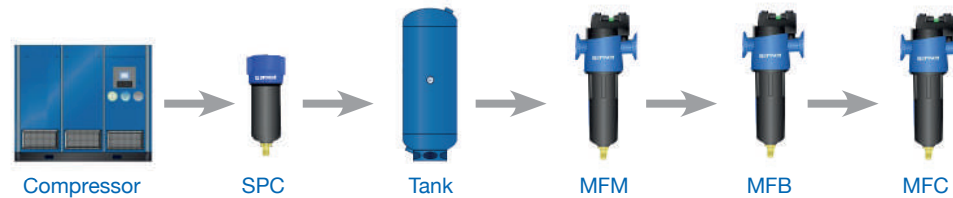
Conventional applications: Automotive garages / Small industry / Craft workshops / Standard workshops



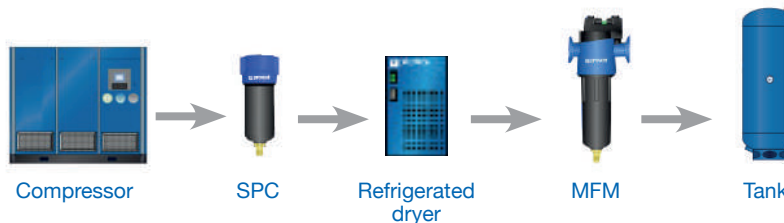
“Oil-free” applications: Painting / Varnishing / Printing / Measurements



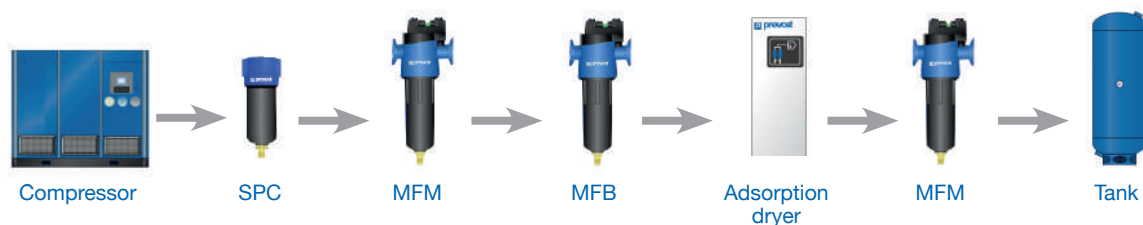
“Clean air” applications: Breathable air / Water-based paints / Food industries
Medical sector / Pharmaceuticals



Refrigerated dryer applications: All industries / All dry air bodywork shops



Adsorption dryer applications: Very dry air industries / Very low ambient temperatures




SPC: Cyclonic Separator - **MFM:** 1 µm filter - **MFB:** coalescence filter 0.01 µm - **MFC:** Active coal filter


D

Painting applications


■ CREATION OF STATIC ELECTRICITY IN COMPRESSED AIR



When a plastic ruler is rubbed on a piece of fabric, the ruler is gradually charged with static electricity.



When charged with static electricity, the ruler will attract small pieces of paper scattered around it.



The same phenomenon applies to compressed air when it circulates under pressure in a coupling or hose.



In bodywork shops, the electrically charged compressed air in the spray gun mixes with the paint, which, once applied to the sheet metal, will attract dust from the surrounding environment.



In painting facilities, dust in the air is attracted to static electricity and will stick to freshly painted surfaces. Rectifying this means re-doing the entire painting process, resulting in an overall loss for the bodyshop operator. The use of a special anti-static hose is essential in order to avoid this type of problem.

E

Pipe diameter

- The **Nominal Diameters** (DN) differ from the actual **Outer Diameters** of the pipes. Several different thicknesses may be available for the same DN: DN is equivalent to NPS (Nominal Pipe Size) in the ASME (American) standards expressed in inches. The various thicknesses are set out in the EN 10220 European standard (in this except, DN's greater than 700 are not included).

Nominal Diameter		Outer Diameter (in)
Ø in millimeters (DN)	Ø in inches (NPS)	ASME standard pipes
6	1/8"	0.405"
8	1/4"	0.540"
12	3/8"	0.675"
15	1/2"	0.840"
20	3/4"	1.050"
25	1"	1.315"
32	1 1/4"	1.660"
40	1 1/2"	1.900"
50	2"	2.375"
65	2 1/2"	2.875"
80	3"	3.500"
90	3 1/2"	4.000"
100	4"	4.500"
125	5"	5.563"
150	6"	6.625"
200	8"	8.625"
250	10"	10.750"
300	12"	12.750"
350	14"	14.000"
400	16"	16.000"
450	18"	18.000"
500	20"	20.000"
550	22"	22.000"
600	24"	24.000"
650	26"	26.000"
700	28"	28.000"



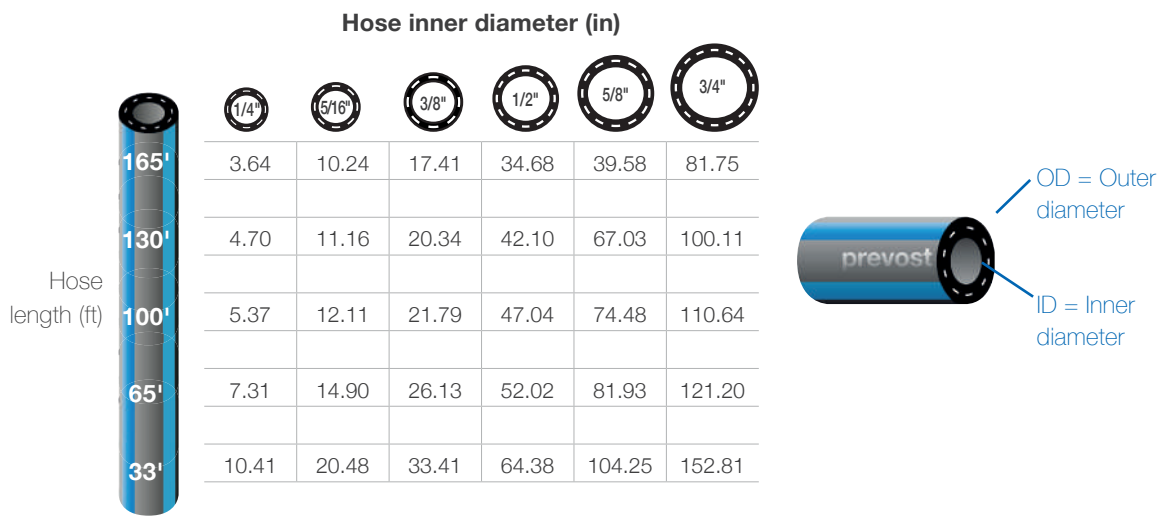
F

Flow rates and pressure loss

■ FLOW RATE IN COMPRESSED AIR FLEXIBLE HOSES

It is important to select the correct size hose because using a hose that is too long or too small of a diameter, can cause pressure loss or a reduced flow rate.

Estimated flow rate (cfm) Supply pressure = 100 psi and pressure loss $\Delta P = 4$ psi

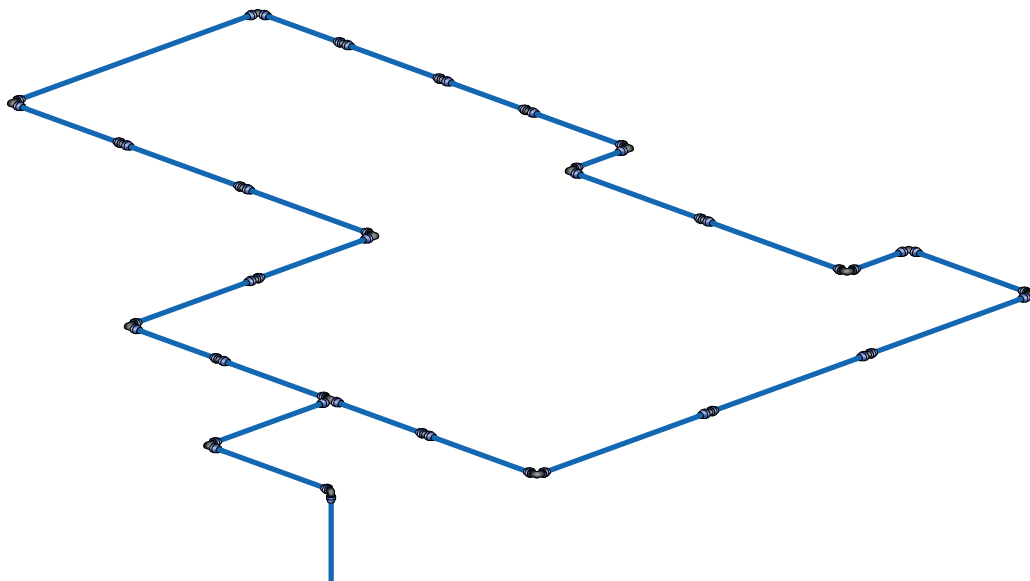


Designation of hose inner diameters	
Diameter in inches (NPS)	Diameter (mm)
3/16"	4
1/4"	6
5/16"	8
3/8"	10
1/2"	12
5/8"	16
3/4"	20
1"	25
1 1/4"	32
1 1/2"	40
2"	50

In North America, hose dimensions are expressed in **fractions of inches NPS (nominal pipe size)**. This table shows the conversion between the two systems. There is no link between this and the threads.

Flow rates and **pressure loss**

■ SELECTING THE DIAMETER OF PPS PIPE (PREVOST PIPING SYSTEM)



Correspondence of PPS fitting in additional feet of pipes

Ø pipe (in)					
3/4"	0.66	3.94	3.28	0.66	2.80
1"	0.66	6.56	4.26	0.66	5.90
1 1/4"	0.98	13.2	4.92	0.98	7.90
1 1/2"	0.98	11.55	5.90	1.31	11.48
2"	0.98	14.10		1.31	18.04
2 1/2"	1.31	16.40		1.64	
3"	1.31	21.00		1.64	

at 100 psi

- Example of a 50 HP compressor at 87 psi $50 \times 4.5 = 225$ cfm
- The facility is comprised of 25 lengths of pipe that are 19.7 ft each $\times 25 = 492.5$ ft
- There are 11 equal fittings, 12 equal elbow fittings, and one equal T-fitting.
- Without calculating pressure losses, we select 1 1/2" from the diameter table.
- The loss of pressure from the equal fittings represents $0.98 \text{ ft} \times 11 =$ additional 10.8 ft
- The loss of pressure from the elbow fittings represents $12.46 \text{ ft} \times 12 =$ additional 150 ft
- The loss of pressure from the T-fitting represents $11.48 \text{ ft} \times 1 =$ additional 11.48 ft
- The total loss is: $10.8 + 150 + 11.5 = 172.3$ ft i.e. a total of 664.8 ft

G

Standards and directives

■ ATEX DIRECTIVE



The **ATEX Directive** refers to **EX**plosive **AT**mospheres, defined as a mixture with the air, in atmospheric conditions, of flammable substances such as gases, vapors, mists or dusts, in which, after ignition, the combustion may spread to the entire unburned mixture (definition drawn from **Directive 2014/34/UE**). Certified equipment must be designed to prevent the creation of an ignition source, as defined by the **EN1127-1 standard**:

- Hot surfaces
- Flames and hot gases
- Mechanically generated sparks
- Electrical sparks
- Stray electric currents, cathodic corrosion protection
- Static electricity
- Lightning
- Electromagnetic fields
- Electromagnetic waves
- Ionizing radiation
- Ultrasonics
- Adiabatic compression and shock waves, gas flows
- Chemical reactions

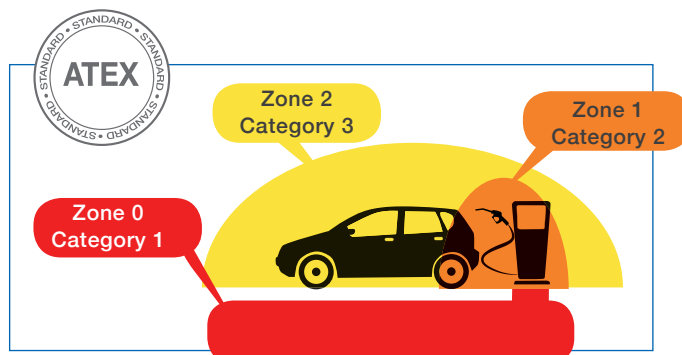
The prevailing regulations are as follows:

- Directive 1999/92/CE
- Directive 2014/34/UE

prevoS1 couplings comply with ATEX category 2 and 3 requirements.



Zone		Equipment category	Presence of explosive atmosphere
Gaz	Dust		
0	20	1	Constantly or for long periods > 1000 hours per year
1	21	2	Sometimes 10 ~ 1000 hours per year
2	22	3	Rarely or during short periods < 10 hours per year



Examples of explosive risk zone classifications


Standards and directives

■ WHAT IS THE OSHA COMPRESSED AIR STANDARD?



OSHA is the United States' Department of Labor regulatory body. The article relating to safety using compressed air is: **OSHA 1910 242B**.

The nozzle used for cleaning operations must be fitted with a pressure-reducing valve or other mechanism that reduces the pressure at the end of the nozzle when in contact with a surface to less than 30 psi (2.10 bar).



Relief of pressure above 30 psi

OSH, OSHA, MTLOSHA AND SIL nozzle blow guns are compliant with **OSHA 1910 242B** standard.



■ REACH & ROHS STANDARDS

PREVOST is compliant with the specifications outlined in the **REACH** and **RoHS** standards regarding the substances used to coat parts in its product ranges.



The **REACH** (Registration, Evaluation, Authorization and Restriction of **CH**emicals) specifications correspond broadly to the constraints previously imposed by the **RoHS** standards.

REACH is a European Parliament regulation that entered into force in 2007 and is applicable to all industrial fields



RoHS (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment). Effective since 2006, **RoHS** was implemented for public health and recycling reasons. This directive applies to all new products marketed in the European Union, regardless of whether they are imported or manufactured within the EU.

The following substances are prohibited: Lead / Mercury / Cadmium / Hexavalent chromium (Cr6+) / Polybromobiphenyl (PBB) / Polybrominated diphenyl ether (PBDE)

Conversion tables

Metric and imperial units								
Physical quantities		Metric units		Imperial units				
Pressure		bar		psi				
Volumetric flow rate		l/min		cfm				
Power		kW		HP				
Temperature		°C		°F				
Length		m		foot				
Volume		l		gal				
Mass		kg		lb				
Pressure								
			Bar	MPa	psi			
Bar	1 bar		1	0.10	14.50			
Megapascal	1 MPa		10	1	145.04			
Pound per Squared Inch	1 psi		0.07	0.007	1			
Vacuum								
			mbar	psi	mmHg	inHg		
Millibar	1 mbar		1	0.01	0.75	0.03		
Pound per squared inch	1 psi		68.95	1	51.71	2.04		
Millimeter of mercury	1 mmHg		1.33	0.02	1	0.04		
Inch of mercury	1 inHg		33.86	0.49	25.40	1		
Volumetric flow rate								
			m³/h	l/min	cfm	gpm		
Cubing meter per hour	1 m³/h		1	16.67	0.59	4.40		
Liter per minute	1 l/min		0.06	1	0.04	0.26		
Cubic Foot per Minute	1 cfm		1.70	28.32	1	7.48		
Gallon US per minute	1 gpm		0.23	3.79	0.13	1		
Power								
			Cv	kW				
Horse power	1 Cv		1	0.74				
Kilowatt	1 kW		1.36	1				
Temperature								
			°C	K	°F			
Degree Celsius	1°C		1	274.15	33.80			
Kelvin	1 K		-272.15	1	-457.87			
Degree Fahrenheit	1°F		-17.22	255.93	1			
Length								
			m	mm	ft	in		
Meter	1 m		1	1000	3.28	39.37		
Millimeter	1 mm		0.001	1	0,003	0,04		
Foot	1 ft		0.30	304.80	1	12		
Inch	1 in		0.03	25.40	0.08	1		
Volume								
			cm³	l	in³	ft³	fl Oz	gal
Cubic centimeter	1 cm³		1	0.001	0.06	0.00003	0.03	0.0003
Liter	1 l		1000	1	61.02	0,04	33.81	0.264
Cubic inch	1 in³		16.39	0.02	1	0.0006	0.55	0.004
Cubic foot	1 ft³		28316.85	28.32	1728	1	957.51	7.48
Fluid ounce	1 fl Oz		29.57	0.03	1,80	0.001	1	0.008
Gallon US	1 gal		3785.41	3.79	231	0.13	128	1
Masse								
			kg	g	lb	Oz		
Kilogram	1 kg		1	1000.00	2,2	35.27		
Gram	1 g		0.001	1	0.002	0.04		
Pound	1 lb		0.45	453.59	1	16		
Ounce	1 Oz		0.03	28.35	0.06	1		

Alphanumerical index

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
0507	249	27202 MTLBP3	276	ABG 06ECR	269	BAL 4070DP	256	CRP 086813	48, 63
0708EG	248	27202 MTLOSHA	275	ABG 06MTL	268	BAL 6080B	256	CRP 086816	48, 63
0709	249	27202 MTLRT	276	ABG 06MTLH	268	BAL 70100DP	256	CRP 116202	65
0709E	248	27202 OSHA	275	ABG 060SH	269	BAL 80100CP	256	CRP 116203	65
0809EG	248	27202 PRE	275	ABG 06PRE	268	BAL 100120CP	256	CRP 116204	65
0810E	248	27202 PREBP3	275	ABG 06SIL	268	BAL 100140DP	256	CRP 116252	65
0910EG	248	27202 SIL	275	AIRCA 3825	233	BAL 140180DP	256	CRP 116253	65
0911	249	A1 250250	159	AIRCA 3850	233	BAL 180220DP	256	CRP 116254	65
0911E	248	A1 251251	159	AIRCA 38500	233	BAL 220250DP	256	CRP 116810	65
1011EG	248	A1 252252	159	APG 060SH	269	BAL 250300F	257	CRP 116813	65
1012E	248	A1 253253	159	ARC 061201	80	BAL 300350F	257	CRP 116816	65
1012EG	248	A1 254253	159	ARC 061202	80	BAL 350450F	257	CRP 116819	65
1113	249	A3 200200	159	ARC 061203	80	BAL 450550F	257	CS 180L	187
1113E	248	A3 201201	159	ARC 061251	80	BAL 550650F	257	CS 310L	187
1113EG	248	A3 202202	159	ARC 061252	80	BAL 650750F	257	CS 420L	187
1213D	250	A3 203203	159	ARC 061253	80	BAL 750900F	257	CS 500	187
1214E	248	A4 251200	159	ARC 061810	80	BAL 9001050F	257	CSI 061201	43
1315	249	A4 252200	159	ARP 066201	42, 81	BC 0927	250	CSI 061202	43
1315EG	248	A4 252201	159	ARP 066202	42, 81	BG FIX	261, 271	CSI 061202SW	43
1415D	250	A4 253201	159	ARP 066251	42, 81	BG FIXM	261, 271	CSI 061203	43
1416E	248	A4 253202	159	ARP 066252	42, 81	BOB 110VA	331	CSI 061203WK	44, 192
1517	249	A4 254201	159	ARP 066806	42, 81	CBG 06ECR	270	CSI 061251	43
1517EG	248	A7 203	159	ARP 066810	42, 81	CBG 06MTL	270	CSI 061252	43
1518	249	A7 204	159	ASI 061201	40	CBG 060SH	271	CSI 061253	43
1617D	250	A9 200200	160	ASI 061202	40	CBG 06PRE	270	CSI 061806	43
1618E	248	A9 201201	160	ASI 061203	40	CBG 06SIL	270	CSI 061810	43
1720	249	A9 202202	160	ASI 061203WK	41, 192	COL 253252	331	CSI 061813	43
1819D	250	A9 203203	160	ASI 061251	40	CP 016	187	CSI 062201	44
1821	249	A10 200250	160	ASI 061252	40	CP 38	187	CSI 068203WK	44, 197
2023	249	A10 201251	160	ASI 061253	40	CP 814	187	CSI 068204WK	44, 197
2225	249	A10 202252	160	ASI 061806	40	CP 1420	187	CSI 081201	46
2327	249	A10 203253	160	ASI 061810	40	CPG 060SH	271	CSI 081202	46
2528	249	A11 200	160	ASI 061813	40	CP M8	187	CSI 081202SW	46
2731	249	A11 201	160	ASI 068203WK	41, 197	CRP 066201	45, 61	CSI 081203	46
3134	249	A11 202	160	ASI 068204WK	41, 197	CRP 066202	45, 61	CSI 081203WK	47, 192
3437	249	A11 203	160	ASVM 1T	279	CRP 066251	45, 61	CSI 081251	46
3740	249	A14 200	161	ASVM 301	280	CRP 066252	45, 61	CSI 081252	46
4043	249	A14 201	161	ASVM 302	280	CRP 066806	45, 61	CSI 081253	46
4346	249	A14 202	161	ASVM 303	280	CRP 066810	45, 61	CSI 081810	46
27202 ECR	275	A15 201	161	ASVM KIT	279	CRP 066813	45, 61	CSI 081813	46
27202 MB13	276	A16 203201S4	161	BAL 0408E	257	CRP 086201	48, 63	CSI 081816	46
27202 MB130SHA	276	A16 203201S5	161	BAL 0410A	256	CRP 086202	48, 63	CSI 082203	47
27202 MB20	276	A17 200	166	BAL 0715E	257	CRP 086203	48, 63	CSI 088203WK	47, 197
27202 MB200SHA	276	A17 201	166	BAL 1020A	256	CRP 086251	48, 63	CSI 088204WK	47, 197
27202 MB400SHA	276	A17 202	166	BAL 1225E	257	CRP 086252	48, 63	CSI 088204WKC6	197
27202 MS13	276	A17 203	166	BAL 2030A	256	CRP 086253	48, 63	CSM 061201	60
27202 MS20	276	A24 200	166	BAL 2040B	256	CRP 086806	48, 63	CSM 061202	60
27202 MTL	276	A24 201	166	BAL 4060B	256	CRP 086810	48, 63	CSM 061202SW	60

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
CSM 061203	60	DGO 0820HPI	222	DMO 1015ES	216	DRFI 1012ESHE	215	ERC 071251	77
CSM 061251	60	DGO 1025ES	217	DMO 1015IS	216	DRFI 1012LS	220	ERC 071252	77
CSM 061252	60	DGO 1025IS	217	DMO 1015US	216	DRFINB 1012ESHE	215	ERC 071253	77
CSM 061253	60	DGO 1025US	217	DMO 1020ES	216	DSF 0805ES	212	ERC 071806	77
CSM 061806	60	DGO 1315OIL	223	DMO 1020IS	216	DSF 0805IS	212	ERC 071810	77
CSM 061810	60	DGO 1320ES	217	DMO 1020US	216	DSF 0805US	212	ERC 071810FA	77
CSM 061813	60	DGO 1320IS	217	DMO 1310OIL	223	DSF 1003ES	212	ERC 071813	77
CSM 081201	62	DGO 1320OIL	223	DMO 1315ES	216	DSF 1003IS	212	ERP 076101HE	35
CSM 081202	62	DGO 1320US	217	DMO 1315IS	216	DSF 1003US	212	ERP 076102HE	35
CSM 081202SW	62	DGO 1610ES	217	DMO 1315US	216	DSFI 0805ESHE	215	ERP 076151HE	35
CSM 081203	62	DGO 1610IS	217	DMO 1610LS	219	DSFI 0805LS	220	ERP 076152HE	35
CSM 081251	62	DGO 1610US	217	DMOI 1610LS	221	DVO 1025ES	218	ERP 076201	33, 78
CSM 081252	62	DGO 1615LS	219	DMOI PIV2	224	DVO 1025IS	218	ERP 076202	33, 78
CSM 081253	62	DGOI 1615LS	221	DMO NHP	223	DVO 1025US	218	ERP 076251	33, 78
CSM 081810	62	DGOI PIV2	224	DMO PIV2	224	DVO 1320LS	219	ERP 076252	33, 78
CSM 081813	62	DGO NHP	223	DPF 0815ES	214	DVO 1515LS	219	ERP 076806	33, 78
CSM 081816	62	DGO PIV2	224	DPF 0815IS	214	EBG 07ECR	267	ERP 076810	33, 78
CSM 111202	64	DLO 1330ES	218	DPF 0815US	214	EBG 07MTL	266	ERP 076810HE	35
CSM 111203	64	DLO 1330IS	218	DPF 1012ES	214	EBG 07MTLH	266	ERP 076813	33, 78
CSM 111204	64	DLO 1330US	218	DPF 1012IS	214	EBG 070SH	267	ERP 116202	37, 39
CSM 111252	64	DLO 1625ES	218	DPF 1012US	214	EBG 07PRE	266	ERP 116203	37, 39
CSM 111253	64	DLO 1625IS	218	DRF 0812ES	213	EBG 07SIL	266	ERP 116204	37, 39
CSM 111254	64	DLO 1625LS	219	DRF 0812IS	213	ECB 06	250	ERP 116252	37, 39
CSM 111810	64	DLO 1625US	218	DRF 0812US	213	ECB 06C	250	ERP 116253	37, 39
CSM 111813	64	DLO 1920ES	218	DRF 0815ES	213	ECP S11417	66, 254, 261	ERP 116254	37, 39
CSM 111816	64	DLO 1920IS	218	DRF 0815IS	213	ECP S11720	66, 254, 261	ERP 116810	37, 39
CSM 111819	64	DLO 1920LS	219	DRF 0815US	213	EHS 25	240	ERP 116813	37, 39
CS VIS1	187	DLO 1920US	218	DRF 1010ES	213	ELP 096002	89	ERP 116816	37, 39
CS VIS2	187	DLOI 1625LS	221	DRF 1010IS	213	ELP 096003	89	ERP 116819	37, 39
DEPANNE 244	254	DLOI 1920LS	221	DRF 1010US	213	ELP 096204	88	ESDI 1440	239
DGF 0810ES	214	DLOI PIV	224	DRF 1012ES	213	ELP 096304	88	ESDI 1454	239
DGF 0810IS	214	DLO PIV	224	DRF 1012IS	213	ELP 096354	88	ESI 071101HE	34
DGF 0810US	214	DMF 0812ES	212	DRF 1012US	213	ELP 096819	88	ESI 071102HE	34
DGF 0815ES	214	DMF 0812IS	212	DRF 1015ES	213	ELP JT	89	ESI 071103HE	34
DGF 0815IS	214	DMF 0812US	212	DRF 1015IS	213	ELS 090204	87	ESI 071151HE	34
DGF 0815US	214	DMO 0610GR	223	DRFB 0812AS	213	ELS 090304	87	ESI 071152HE	34
DGF 0820ES	214	DMO 0615GR	223	DRFB 0812ES	213	ELS 090819	87	ESI 071153HE	34
DGF 0820IS	214	DMO 0810ES	216	DRFB 0812IS	213	ELS 091204	87	ESI 071201	31
DGF 0820US	214	DMO 0810IS	216	DRFB 0812US	213	ELS 091304	87	ESI 071201SW	31
DGF 1010ES	214	DMO 0810US	216	DRFB 0815AS	213	ELS 091819	87	ESI 071202	31
DGF 1010IS	214	DMO 0815ES	216	DRFB 0815ES	213	ELS JP34	87	ESI 071203WK	32, 191
DGF 1010US	214	DMO 0815HP	222	DRFB 0815IS	213	ELV 201	331	ESI 071251	31
DGF 1015ES	214	DMO 0815HPI	222	DRFB 0815US	213	ELV 202	331	ESI 071252	31
DGF 1015IS	214	DMO 0815IS	216	DRFB 1010AS	213	ELV 203	331	ESI 071253	31
DGF 1015US	214	DMO 0815US	216	DRFB 1010ES	213	EPG 070SH	267	ESI 071806	31
DGF 1310ES	214	DMO 0820ES	216	DRFB 1010IS	213	ERC 071201	77	ESI 071810	31
DGF 1310IS	214	DMO 0820IS	216	DRFB 1010US	213	ERC 071201FA	77	ESI 071810HE	34
DGF 1310US	214	DMO 0820US	216	DRFB 1012AS	213	ERC 071202	77	ESI 071813	31
DGF PIV	224	DMO 1010ES	216	DRFB 1012ES	213	ERC 071202FA	77	ESI 078203WK	32, 196
DGO 0620GR	223	DMO 1010IS	216	DRFB 1012IS	213	ERC 071203	77	ESI 078204WK	32, 196
DGO 0820HP	222	DMO 1010US	216	DRFB 1012US	213			ESI 078204WKA6	196

Part number	Page
ESI 111202	38
ESI 111202CB	36
ESI 111203	38
ESI 111203CB	36
ESI 111203WK	38, 192
ESI 111204	38
ESI 111252	38
ESI 111252CB	36
ESI 111253	38
ESI 111253CB	36
ESI 111254	38
ESI 111810	38
ESI 111810CB	36
ESI 111813	38
ESI 111813CB	36
ESI 111816	38
ESI 111816CB	36
ESI 111819	38
ESI 111819CB	36
ESI 118204WK	38, 196
ESI 118204WKE7	196
ESTO 3804FA	236
ESTO 3835FA	236
ESTO 3850FA	236
ESTO 3875FA	236
ETANCHE 177	167
EVHO 1942	239
FLT 150	167
IBG 06ECR	263
IBG 06MTL	262
IBG 06MTLH	262
IBG 060SH	263
IBG 06PRE	262
IBG 06SIL	262
INOX 0507	250
INOX 0708EG	249
INOX 0709	250
INOX 0709E	248
INOX 0809EG	249
INOX 0810E	248
INOX 0910EG	249
INOX 0911	250
INOX 0911E	248
INOX 1011EG	249
INOX 1012E	248
INOX 1012EG	249
INOX 1113	250
INOX 1113E	248
INOX 1113EG	249

Part number	Page
INOX 1214E	248
INOX 1314EG	249
INOX 1315	250
INOX 1315E	248
INOX 1315EG	249
INOX 1416E	248
INOX 1416EG	249
INOX 1517E	248
INOX 1517EG	249
INOX 1518	250
INOX 1618E	248
INOX 1618EG	249
INOX 1719E	248
INOX 1719EG	249
INOX 1720	250
INOX 1820E	248
INOX 2023	250
INOX 2327	250
IPG 060SH	263
IRC 061201	69
IRC 061201FA	69
IRC 061202	69
IRC 061203	69
IRC 061251	69
IRC 061252	69
IRC 061253	69
IRC 061806	69
IRC 061810	69
IRC 061810FA	69
IRC 061813	69
IRC 081201	71
IRC 081202	71
IRC 081203	71
IRC 081251	71
IRC 081252	71
IRC 081253	71
IRC 081806FA	71
IRC 081810	71
IRC 081810FA	71
IRC 081813	71
IRC 081813FA	71
IRM 061201	83
IRM 061203	83
IRM 061251	83
IRM 061252	83
IRM 061806	83
IRM 061810	83
IRP 066201	17, 50, 70, 84

Part number	Page
IRP 066202	17, 50, 70, 84
IRP 066251	17, 50, 70, 84
IRP 066252	17, 50, 70, 84
IRP 066806	17, 50, 70, 84
IRP 066810	17, 50, 70, 84
IRP 086201	20, 53, 72
IRP 086202	20, 53, 72
IRP 086203	20, 53, 72
IRP 086251	20, 53, 72
IRP 086252	20, 53, 72
IRP 086253	20, 53, 72
IRP 086810	20, 53, 72
IRP 086813	20, 53, 72
IRP 086816	20, 53, 72
IRP 116202	22
IRP 116203	22
IRP 116204	22
IRP 116252	22
IRP 116253	22
IRP 116254	22
IRP 116810	22
IRP 116813	22
IRP 116816	22
IRP 116819	22
ISC 061201	49
ISC 061201FA	49
ISC 061202	49
ISC 061202FA	49
ISC 061203	49
ISC 061251	49
ISC 061252	49
ISC 061253	49
ISC 061806	49
ISC 061810	49
ISC 081201	51
ISC 081202	51
ISC 081202FA	52
ISC 081203	51
ISC 081251	51
ISC 081251FA	52
ISC 081252	51
ISC 081252FA	52
ISC 081253	51
ISC 081253FA	52
ISC 081810	51
ISC 081810FA	52

Part number	Page
ISC 081813	51
ISC 081813FA	52
ISDI 1440	239
ISDI 1454	239
ISI 061201	15
ISI 061202	15
ISI 061202SW	15
ISI 061203	15
ISI 061203WK	16, 190
ISI 061251	15
ISI 061252	15
ISI 061253	15
ISI 061806	15
ISI 061810	15
ISI 062201	15
ISI 068203WK	16, 193
ISI 068204WK	16, 193
ISI 068204WKA6	194
ISI 068204WKC6	194
ISI 068204WKE7	194
ISI 081201	18
ISI 081202	18
ISI 081202SW	18
ISI 081203	18
ISI 081203WK	19, 190
ISI 081251	18
ISI 081252	18
ISI 081253	18
ISI 081810	18
ISI 081813	18
ISI 082203	19
ISI 088203WK	19, 193
ISI 088204WK	19, 193
ISI 088204WKI6	193
ISI 111202	21
ISI 111203	21
ISI 111203WK	21, 190
ISI 111204	21
ISI 111252	21
ISI 111253	21
ISI 111254	21
ISI 111810	21
ISI 111813	21
ISI 111816	21
ISI 111819	21
ISI 118204WK	21, 193
ISI 118204WKI6	194
ISUR 3806FA	239
ISUR 3835FA	239

Part number	Page
ISUR 3850FA	239
JDT 3838	158
JFT 1208ZS	157
JFT 1209ZS	157
JFT 1210ZS	157
JFT 1213ZS	157
JFT 1216ZS	157
JFT 1406ZS	157
JFT 1408ZS	157
JFT 1409ZS	157
JFT 1410ZS	157
JFT 1804ZS	157
JFT 1806ZS	157
JFT 3416ZS	157
JFT 3808ZS	157
JFT 3810ZS	157
JFT 3813ZS	157
JFT 3816ZS	157
JFT 12252	157
JFT 12253	157
JFT 14251	157
JFT 38251	157
JFT 38252	157
JFT 38253	157
KB 22A	277
KB 22E	277
KB 22I	277
KB 22U	277
KBSH 32A	277
KBSH 32E	277
KBSH 32I	277
KBSH 32U	277
KBSH 322	277
KBSH 324	277
LEM 253	189
LEM 254	189
LEM 255	189
LEM 256	189
LEM 257	189
LEM 258	189
MA 14	166, 333
MA 14T	166, 333
MBC 203ES	326
MBC 203IS	326
MBC 203US	326
MBCR 203ES	326
MBCR 203IS	326
MBCR 203US	326
MBR 203ES	326

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
MBR 203IS	326	MFBC 207	322	MFMC 1214	321	NSB FA	66	PACR I18141000	228
MBR 203US	326	MFBC 208	322	MFMC 101	321	OP BD201	162	PAM 203	333
MF 203S1	199	MFBC 209	322	MFMC 102	321	OP BDM201	162	PAM FLO	333
MF 203S2	199	MFBC 210	322	MFMC 103	321	OP BDMR201	162	PARD I1814100	227
MF 204S2	199	MFBC 211	322	MFMC 104	321	OP BDR201	162	PARD I2738100	227
MF 204S4	199	MFBC 212	322	MFMC 105	321	PABE I0918100	227	PBI9 814	252
MF 204S4AS	41, 198	MFBC 213	322	MFMC 106	321	PABE I0918500	228	PBI9 1117	252
MF 204S4CS	44, 198	MFBC 214	322	MFMC 107	321	PABE I1053100	227	PBI9 1320	252
MF 204S4ES	32, 198	MFC 3201	323	MFMC 108	321	PABE I1053500	228	PBI12 1524	252
MF 204S4IS	16, 198	MFC 3202	323	MFMC 109	321	PABE I1331100	227	PBI12 1928	252
MF 204S4US	24, 198	MFC 3203	323	MFMC 110	321	PABE I1331500	228	PBI12 2232	252
MF 204S6	199	MFC 3204	323	MFMC 111	321	PABE I1814100	227	PBI12 2638	252
MF 204S6AS	41, 198	MFC 3205	323	MFMC 112	321	PABE I1814500	228	PBI12 3244	252
MF 204S6CS	44, 198	MFC 3206	323	MFMC 113	321	PABE I2351100	227	PBI12 3850	252
MF 204S6ES	32, 198	MFC 3207	323	MFMC 114	321	PABE I2738100	227	PBI12 4456	252
MF 204S6IS	16, 198	MFC 3208	323	MPA 1	324	PABE I3212100	227	PBI12 5065	252
MF 204S6US	24, 198	MFC 3209	323	MPA 2	324	PABE I09181000	228	PBI12 5875	252
MF 204S8	199	MFC 3210	323	MPA 3	324	PABE I10531000	228	PBI12 6885	252
MF 204S8AS	41, 198	MFC 3211	323	MPA 4	324	PABE I13311000	228	PBI12 7795	252
MF 204S8CS	44, 198	MFC 3212	323	MPA J1	324	PABE I18141000	228	PBI12 87112	252
MF 204S8ES	32, 198	MFC 3213	323	MPA J2	324	PABK I0918100	227	PBI12 104138	252
MF 204S8IS	16, 198	MFC 3214	323	MPA J3	324	PABK I0918500	228	PBI12 130165	252
MF 204S8US	24, 198	MFCC 301	323	MPA J4	324	PABK I1053100	227	PBI12 150180	252
MF 204S10	199	MFCC 302	323	MPD	325	PABK I1053500	228	PBI12 175205	252
MF 204S10AS	41, 198	MFCC 303	323	MPD X3	325	PABK I1331100	227	PBI12 200231	252
MF 204S10CS	44, 198	MFCC 304	323	MPD X3KIT	325	PABK I1331500	228	PBI12 226256	252
MF 204S10ES	32, 198	MFCC 305	323	MPI 1	325	PABK I1814100	227	PBI12 251282	252
MF 204S10IS	16, 198	MFCC 306	323	MPI 2	325	PABK I1814500	228	PBI12 277307	252
MF 204S10US	24, 198	MFCC 307	323	MPK 1	324	PABK I2351100	227	PBM 8	252
MFB 2201	322	MFCC 308	323	MPK 2	324	PABK I2738100	227	PBM 9	252
MFB 2202	322	MFCC 309	323	MPK 3	324	PABK I3212100	227	PBM 10	252
MFB 2203	322	MFCC 310	323	MPK 4	324	PABK I09181000	228	PBM 11	252
MFB 2204	322	MFCC 311	323	MSI 200250	166	PABK I10531000	228	PBM 12	252
MFB 2205	322	MFCC 312	323	MSI 201251	166	PABK I13311000	228	PBM 13	252
MFB 2206	322	MFCC 313	323	MSI 202252	166	PABK I18141000	228	PBM 14	252
MFB 2207	322	MFCC 314	323	MSI 203253	166	PACR I0918100	227	PBM 15	252
MFB 2208	322	MFMC 1201	321	MT CA0440	313	PACR I0918500	228	PBM 16	252
MFB 2209	322	MFMC 1202	321	MT CA0440T	313	PACR I1053100	227	PBM 17	252
MFB 2210	322	MFMC 1203	321	MT CA0640	313	PACR I1053500	228	PBS9 814	251
MFB 2211	322	MFMC 1204	321	MT CA0640T	313	PACR I1331100	227	PBS9 1117	251
MFB 2212	322	MFMC 1205	321	MT CA1040	313	PACR I1331500	228	PBS9 1320	251
MFB 2213	322	MFMC 1206	321	MT CA1040T	313	PACR I1814100	227	PBS9 1524	251
MFB 2214	322	MFMC 1207	321	MT CA1640	313	PACR I1814500	228	PBS9 1928	251
MFBC 201	322	MFMC 1208	321	MT CA1640T	313	PACR I2351100	227	PBS9 2232	251
MFBC 202	322	MFMC 1209	321	MT IA1040V	313	PACR I2738100	227	PBS9 2638	251
MFBC 203	322	MFMC 1210	321	MT RA0450T	313	PACR I3212100	227	PBS9 3244	251
MFBC 204	322	MFMC 1211	321	MT RA1023T	313	PACR I09181000	228	PBS9 3850	251
MFBC 205	322	MFMC 1212	321	MT RA1050T	313	PACR I10531000	228	PBS9 4456	251
MFBC 206	322	MFMC 1213	321	MT RA2550T	313	PACR I13311000	228	PBS9 5065	251

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
PBS12 1524	251	PLA BB	205	PPS1 BA80	184	PPS1 CI40	186	PPS1 MF40206	180
PBS12 1928	251	PLA CR	206	PPS1 B016	178	PPS1 CI40UNC	186	PPS1 MF40207	180
PBS12 2232	251	PLA FIX	205	PPS1 B020	178	PPS1 CI50	186	PPS1 MF50207	180
PBS12 2638	251	PLA HR	205, 240	PPS1 B025	178	PPS1 CI50UNC	186	PPS1 MF50208	180
PBS12 3244	251	PLA HRK	206	PPS1 B032	178	PPS1 CI63	186	PPS1 MF63208	180
PBS12 3850	251	PLA K	205	PPS1 B040	178	PPS1 CI63UNC	186	PPS1 MF63209	180
PBS12 4456	251	PLA RA	206	PPS1 B050	178	PPS1 CI80	186	PPS1 MF80209	180
PBS12 5065	251	PLA TC	206	PPS1 B063	178	PPS1 CI80UNC	186	PPS1 MF802010	180
PBS12 5875	251	PLA TH	205	PPS1 B080	178	PPS1 CIRS116	187	PPS1 MM16252	180
PBS12 6885	251	PLA VEAf	206	PPS1 BP2516	181	PPS1 CIRS120	187	PPS1 MM16253	180
PBS12 7795	251	PLA VEGM	206	PPS1 BP2520	181	PPS1 CIRS125	187	PPS1 MM20253	180
PBS12 87112	251	PLA VEPm	206	PPS1 BP3216	181	PPS1 CIRS132	187	PPS1 MM20254	180
PBS12 104138	251	PLA VEWf	206	PPS1 BP3220	181	PPS1 CIRS140	187	PPS1 MM25253	180
PBS12 130165	251	PL JET	284	PPS1 BP4016	181	PPS1 CIRS150	187	PPS1 MM25254	180
PBS12 150180	251	PL JETI	284	PPS1 BP4020	181	PPS1 CIRS163	187	PPS1 MM25255	180
PBS12 175205	251	PMA 201T	333	PPS1 BP4025	181	PPS1 CIRS180	187	PPS1 MM32255	180
PBS12 200231	251	PM JET	284	PPS1 BP5016	181	PPS1 CIS1632	186	PPS1 MM32256	180
PBS12 226256	251	PM JETI	284	PPS1 BP5020	181	PPS1 CIS4050	186	PPS1 MM40256	180
PBS12 251282	251	PON 38251	158	PPS1 BP5025	181	PPS1 CLE16	185	PPS1 MM40257	180
PBS12 277307	251	PON 38252	158	PPS1 BP6320	181	PPS1 CLE20	185	PPS1 MM50257	180
PDE 100KR	331	PON JDT3838	158	PPS1 BP6325	181	PPS1 CLE25	185	PPS1 MM50258	180
PDE 100T	331	PPS1 4C16	178	PPS1 BP6332	181	PPS1 CLE32	185	PPS1 MM63258	180
PF 1316	253	PPS1 4C20	178	PPS1 BP8020	181	PPS1 CLE40	185	PPS1 MM63259	180
PF 1521	253	PPS1 4C25	178	PPS1 BP8025	181	PPS1 CLE50	185	PPS1 MM80259	180
PF 2023	253	PPS1 4C32	178	PPS1 BP8032	181	PPS1 CLE63	185	PPS1 MM802510	180
PF 2225	253	PPS1 4C40	178	PPS1 BT25202	181	PPS1 CLE80	185	PPS1 MR2520	177
PF 2427	253	PPS1 9C16	177	PPS1 BT25203	181	PPS1 DK63	183	PPS1 MR3225	177
PF 2731	253	PPS1 9C20	177	PPS1 BT32203	181	PPS1 DK80	183	PPS1 MR4032	177
PF 3135	253	PPS1 9C25	177	PPS1 BT32204	181	PPS1 IP16	184	PPS1 MR5040	177
PF 3540	253	PPS1 9C32	177	PPS1 BT40203	181	PPS1 IP20	184	PPS1 MR6350	177
PF 3843	253	PPS1 9C40	177	PPS1 BT40204	181	PPS1 IP25	184	PPS1 MR8063	177
PF 4348	253	PPS1 9C50	177	PPS1 BT40205	181	PPS1 IP32	184	PPS1 NUT16	183
PF 4550	253	PPS1 9C63	177	PPS1 BT50203	181	PPS1 IP40	184	PPS1 NUT20	183
PF 4955	253	PPS1 9C80	177	PPS1 BT50204	181	PPS1 IP50	184	PPS1 NUT25	183
PF 5460	253	PPS1 9CM16252	178	PPS1 BT50205	181	PPS1 IP63	184	PPS1 NUT32	183
PF 5965	253	PPS1 9CM16253	178	PPS1 BT63203	181	PPS1 IP80	184	PPS1 NUT40	183
PF 6470	253	PPS1 9CM20253	178	PPS1 BT63204	181	PPS1 LK50	183	PPS1 NUT50	183
PF 6975	253	PPS1 9CM25253	178	PPS1 BT63205	181	PPS1 LK1625	183	PPS1 NUT63	183
PF 7380	253	PPS1 9CM25254	178	PPS1 BT80203	181	PPS1 LK3240	183	PPS1 NUT80	183
PF 7885	253	PPS1 9CM32255	178	PPS1 BT80204	181	PPS1 LK6380	183	PPS1 RSI16	182
PHBE I2538100	229	PPS1 9CM40256	178	PPS1 BT80205	181	PPS1 MF16202	180	PPS1 RSI20	182
PLA 225	203	PPS1 9CM40257	178	PPS1 CI16	186	PPS1 MF16203	180	PPS1 RSI25	182
PLA 225N	204	PPS1 BA16	184	PPS1 CI16UNC	186	PPS1 MF20203	180	PPS1 RSI32	182
PLA 450	203	PPS1 BA20	184	PPS1 CI20	186	PPS1 MF20204	180	PPS1 RSI40	182
PLA 450N	204	PPS1 BA25	184	PPS1 CI20UNC	186	PPS1 MF25203	180	PPS1 RSI50	182
PLA 1000	203	PPS1 BA32	184	PPS1 CI25	186	PPS1 MF25204	180	PPS1 RSI63	182
PLA 1000N	204	PPS1 BA40	184	PPS1 CI25UNC	186	PPS1 MF25205	180	PPS1 RSI80	182
PLA 2000	203	PPS1 BA50	184	PPS1 CI32	186	PPS1 MF32205	180	PPS1 RSIF16203	182
PLA 2000N	204	PPS1 BA63	184	PPS1 CI32UNC	186	PPS1 MF32206	180	PPS1 RSIF20203	182

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
PPS1 RSIF25204	182	PPS1 TT63208	179	PPS TUG25L6	176	PUBK M040625	230	PUS 264R	243
PPS1 RSIF32205	182	PPS1 TT80205	179	PPS TUG32L6	176	PUBK M071025	230	PUS 264V	244
PPS1 RSIF40206	182	PPS1 TT80207	179	PPS TUG40L6	176	PUBK M081225	230	PUS 266	243
PPS1 RSIF50207	182	PPS1 TT80208	179	PPS TUG50L6	176	PUBK M111625	230	PUS 266J	243
PPS1 RSIF63208	182	PPS1 TT80209	179	PPS TUG63L6	176	PUBK M250425	230	PUS 266NR	244
PPS1 RSIF80209	182	PPS1 UF63	183	PPS TUG80L6	176	PUBK M0406100	231	PUS 266R	243
PPS1 RSIM16253	182	PPS1 UF80	183	PPS TUV20L6	176	PUBK M550825	230	PUS 266V	244
PPS1 RSIM20253	182	PPS1 UN16	177	PPS TUV25L6	176	PUBK M0710100	231	PUS 268	243
PPS1 RSIM25254	182	PPS1 UN20	177	PROXI 061101	79	PUBK M0812100	231	PUS 288	243
PPS1 RSIM32255	182	PPS1 UN25	177	PROXI 061102	79	PUBK M951425	230	PUS 2610	243
PPS1 RSIM40256	182	PPS1 UN32	177	PROXI 061103	79	PUBK M2504100	231	PUS 2815	243
PPS1 RSIM50257	182	PPS1 UN40	177	PROXI 061151	79	PUBK M5508100	231	PUYW M040625	230
PPS1 SEAL16	184	PPS1 UN50	177	PROXI 061152	79	PUBK M9514100	231	PUYW M071025	230
PPS1 SEAL20	184	PPS1 UN63	177	PROXI 061153	79	PUCR M040625	230	PUYW M250425	230
PPS1 SEAL25	184	PPS1 UN80	177	PROXI 061806	79	PUCR M071025	230	PUYW M0406100	231
PPS1 SEAL32	184	PPS1 UNS25	177	PROXI 061810	79	PUCR M081225	230	PUYW M550825	230
PPS1 SEAL40	184	PPS1 UNS32	177	PROXI 066101	79	PUCR M250425	230	PUYW M2504100	231
PPS1 SEAL50	184	PPS1 UNS40	177	PROXI 066151	79	PUCR M0406100	231	PUYW M5508100	231
PPS1 SEAL63	184	PPS1 UNS50	177	PROXI 066152	79	PUCR M0710100	231	PV 80	188
PPS1 SEAL80	184	PPS1 UNS63	177	PROXI 066806	79	PUCR M0812100	231	PV 880	188
PPS1 TE16	179	PPS1 UNS80	177	PROXI 066810	79	PUCR M951425	230	R22 CT	155, 229
PPS1 TE20	179	PPS AL	185	PSW SH08	66	PUCR M2504100	231	R22 TD	155
PPS1 TE25	179	PPS BTU1640	176	PSW TL08	66	PUCR M5508100	231	RASTO 63835S	236
PPS1 TE32	179	PPS CH50	185	PTC AS	311	PUGN M040625	230	RASTO 63850S	236
PPS1 TE40	179	PPS CH110	185	PTC ES	311	PUGN M071025	230	RCC ET0404	152
PPS1 TE50	179	PPS CHERAP	185	PTC IS	311	PUGN M250425	230	RCC ET0606	152
PPS1 TE63	179	PPS CHP50	185	PTC IS8	311	PUGN M0406100	231	RCC ET1818	152
PPS1 TE80	179	PPS CK1632	189	PTC US	311	PUGN M550825	230	RCC ET4141	152
PPS1 TR2016	179	PPS CK4050	189	PTC US8	311	PUGN M2504100	231	RCC ET5353	152
PPS1 TR2516	179	PPS CK6380	189	PTE AS	311	PUGN M5508100	231	RCC LG04M3	149
PPS1 TR2520	179	PPS CLESTD	185	PTE ES	311	PUGY M040625	230	RCC LG04M5	149
PPS1 TR3216	179	PPS CT1650	189	PTE IS	311	PUGY M071025	230	RCC LG06M5	149
PPS1 TR3220	179	PPS CTUG3	186	PTE IS8	311	PUGY M250425	230	RCC LG0400	149
PPS1 TR3225	179	PPS CTU110	186	PTE LUS	312	PUGY M0406100	231	RCC LG0600	149
PPS1 TT16202	179	PPS GTU1640	176	PTE US	311	PUGY M550825	230	RCC LG1826	148
PPS1 TT20203	179	PPS LMCB16	176	PTE US8	311	PUGY M2504100	231	RCC LG4126	148
PPS1 TT25203	179	PPS LMCB20	176	PT K	312	PUGY M5508100	231	RCC LG5326	148
PPS1 TT25204	179	PPS LMCB25	176	PT RL	312	PURD M040625	230	RCC LR1820	148
PPS1 TT32204	179	PPS SP16	185	PUBE M040625	230	PURD M071025	230	RCC LR4120	148
PPS1 TT32205	179	PPS SP22	185	PUBE M071025	230	PURD M250425	230	RCC LR5320	148
PPS1 TT40204	179	PPS SP30	185	PUBE M081225	230	PURD M0406100	231	RCC MG04M3	148
PPS1 TT40205	179	PPS TUB20L6	176	PUBE M250425	230	PURD M550825	230	RCC MG04M5	148
PPS1 TT40206	179	PPS TUB25L6	176	PUBE M0406100	231	PURD M2504100	231	RCC MG06M5	148
PPS1 TT50205	179	PPS TUB32L6	176	PUBE M550825	230	PURD M5508100	231	RCC MG0400	148
PPS1 TT50206	179	PPS TUB40L6	176	PUBE M0710100	231	PUS 252	243	RCC MG0600	148
PPS1 TT50207	179	PPS TUB50L6	176	PUBE M0812100	231	PUS 254	243	RCC MG1826	147
PPS1 TT63205	179	PPS TUB63L6	176	PUBE M951425	230	PUS 264	243	RCC MG4126	147
PPS1 TT63206	179	PPS TUB80L6	176	PUBE M2504100	231	PUS 264J	243	RCC MG5326	147
PPS1 TT63207	179	PPS TUG20L6	176	PUBE M5508100	231	PUS 264NR	244	RCC MR1820	147

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
RCC MR4120	147	RCT CR1820	149	RPB FR1820	110	RPB MR5320	108	RPC FR5122	104
RCC MR5320	147	RCT CR4120	149	RPB FR2122	110	RPC ET0404	121	RPC FR5320	104
RCD FG04M3	147	RCT CR5320	149	RPB FR2123	110	RPC ET0606	121	RPC LG04M5	103
RCD FG04M5	147	RCT ET0404	153	RPB FR3120	110	RPC ET0808	121	RPC LG06M5	103
RCD FG06M5	147	RCT ET0606	153	RPB FR3121	110	RPC ET1010	121	RPC LG1826	102
RCD FG0400	147	RCT ET1818	152	RPB FR3821	110	RPC ET1212	121	RPC LG5326	102
RCD FG0600	147	RCT ET4141	152	RPB FR3822	110	RPC ET1414	121	RPC LR0400	103
RCD FG1826	146	RCT ET5353	152	RPB FR4120	110	RPC ET1616	121	RPC LR0401	103
RCD FG4126	146	RCU ET0404	151	RPB FR4121	110	RPC ET1818	121	RPC LR0600	103
RCD FG5326	146	RCU ET0606	151	RPB FR5120	110	RPC ET2121	121	RPC LR0601	103
RCD FR1820	147	RCU ET1818	151	RPB FR5121	110	RPC ET3131	121	RPC LR0602	103
RCD FR4120	147	RCU ET4141	151	RPB FR5122	110	RPC ET3838	121	RPC LR0603	103
RCD FR5320	147	RCU ET5353	151	RPB FR5320	110	RPC ET4141	121	RPC LR0800	103
RCD MG04M3	146	RCU TT0404	152	RPB MG04M5	109	RPC ET5151	121	RPC LR0801	103
RCD MG04M5	146	RCU TT0606	152	RPB MG06M5	109	RPC ET5353	121	RPC LR0802	103
RCD MG06M5	146	RCU TT1818	152	RPB MG1826	108	RPC FG04M5	105	RPC LR0803	103
RCD MG0400	146	RCU TT4141	152	RPB MG3126	108	RPC FG06M5	105	RPC LR1000	103
RCD MG0600	146	RCU TT5353	152	RPB MG5326	108	RPC FG0400	105	RPC LR1001	103
RCD MG1826	146	RCY ET0404	153	RPB MR0400	109	RPC FG0401	105	RPC LR1002	103
RCD MG4126	146	RCY ET0606	153	RPB MR0401	109	RPC FG0600	105	RPC LR1003	103
RCD MG5326	146	RCY ET4141	153	RPB MR0600	109	RPC FG0601	105	RPC LR1201	103
RCD MR1820	146	RCY ET5353	153	RPB MR0601	109	RPC FG0602	105	RPC LR1202	103
RCD MR4120	146	REST0 73835S	236	RPB MR0602	109	RPC FG0603	105	RPC LR1203	103
RCD MR5320	146	REST0 73850S	236	RPB MR0603	109	RPC FG0800	105	RPC LR1402	103
RCM BG04M5	154	RISTO 63850S	236	RPB MR0800	109	RPC FG0801	105	RPC LR1403	103
RCM BG4126	154	RPB FG04M5	111	RPB MR0801	109	RPC FG0802	105	RPC LR1602	103
RCM IG04M5	153	RPB FG06M5	111	RPB MR0802	109	RPC FG0803	105	RPC LR1603	103
RCM IG1826	153	RPB FG0400	111	RPB MR0803	109	RPC FG1000	105	RPC LR1820	102
RCM OG04M5	154	RPB FG0401	111	RPB MR1000	109	RPC FG1001	105	RPC LR2121	102
RCM OG5326	154	RPB FG0600	111	RPB MR1001	109	RPC FG1002	105	RPC LR2122	102
RCT AG04M3	151	RPB FG0601	111	RPB MR1002	109	RPC FG1003	105	RPC LR2123	102
RCT AG04M5	151	RPB FG0602	111	RPB MR1003	109	RPC FG1201	105	RPC LR3120	102
RCT AG06M5	151	RPB FG0603	111	RPB MR1201	109	RPC FG1202	105	RPC LR3121	102
RCT AG0400	151	RPB FG0800	111	RPB MR1202	109	RPC FG1203	105	RPC LR3122	102
RCT AG0600	151	RPB FG0801	111	RPB MR1203	109	RPC FG1402	105	RPC LR3821	102
RCT AG1826	150	RPB FG0802	111	RPB MR1602	109	RPC FG1403	105	RPC LR3822	102
RCT AG4126	150	RPB FG0803	111	RPB MR1603	109	RPC FG1602	105	RPC LR3823	102
RCT AG5326	150	RPB FG1000	111	RPB MR1820	108	RPC FG1603	105	RPC LR4120	102
RCT AR1820	150	RPB FG1001	111	RPB MR2122	108	RPC FG1826	104	RPC LR4121	102
RCT AR4120	150	RPB FG1002	111	RPB MR2123	108	RPC FR2122	104	RPC LR4122	102
RCT AR5320	150	RPB FG1003	111	RPB MR3120	108	RPC FR2123	104	RPC LR5120	102
RCT CG04M3	150	RPB FG1201	111	RPB MR3121	108	RPC FR3120	104	RPC LR5121	102
RCT CG04M5	150	RPB FG1202	111	RPB MR3821	108	RPC FR3121	104	RPC LR5122	102
RCT CG06M5	150	RPB FG1203	111	RPB MR3822	108	RPC FR3821	104	RPC LR5320	102
RCT CG0400	150	RPB FG1602	111	RPB MR4120	108	RPC FR3822	104	RPC MG04M5	101
RCT CG0600	150	RPB FG1603	111	RPB MR4121	108	RPC FR4120	104	RPC MG06M5	101
RCT CG1826	149	RPB FG1826	110	RPB MR5120	108	RPC FR4121	104	RPC MG1826	100
RCT CG4126	149	RPB FG3126	110	RPB MR5121	108	RPC FR5120	104	RPC MG3126	100
RCT CG5326	149	RPB FG5326	110	RPB MR5122	108	RPC FR5121	104	RPC MG4126	100

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
RPC MG5326	100	RPC PT3131	121	RPD MR0400	93	RPD TG0801	99	RPL DR2020	144
RPC MR0400	101	RPC PT3838	121	RPD MR0401	93	RPD TG0802	99	RPL DR2121	144
RPC MR0401	101	RPC PT4141	121	RPD MR0600	93	RPD TG0803	99	RPL DR2222	144
RPC MR0600	101	RPC PT5151	121	RPD MR0601	93	RPD TG1000	99	RPL DR2323	144
RPC MR0601	101	RPC PT5353	121	RPD MR0602	93	RPD TG1001	99	RPL ET0404	145
RPC MR0602	101	RPD FG04M5	98	RPD MR0603	93	RPD TG1002	99	RPL ET0606	145
RPC MR0603	101	RPD FG06M5	98	RPD MR0800	93	RPD TG1003	99	RPL ET0808	145
RPC MR0800	101	RPD FG0400	97	RPD MR0801	93	RPD TG1201	99	RPL ET1010	145
RPC MR0801	101	RPD FG0401	97	RPD MR0802	93	RPD TG1202	99	RPL ET1212	145
RPC MR0802	101	RPD FG0600	97	RPD MR0803	93	RPD TG1203	99	RPL ET1818	145
RPC MR0803	101	RPD FG0601	97	RPD MR1000	93	RPD TG1402	99	RPL ET2121	145
RPC MR1000	101	RPD FG0602	97	RPD MR1001	93	RPD TG1403	99	RPL ET3131	145
RPC MR1001	101	RPD FG0603	97	RPD MR1002	93	RPD TG1602	99	RPL ET3838	145
RPC MR1002	101	RPD FG0800	97	RPD MR1003	93	RPD TG1603	99	RPL ET4141	145
RPC MR1003	101	RPD FG0801	97	RPD MR1201	93	RPD TR2122	98	RPL ET5151	145
RPC MR1202	101	RPD FG0802	97	RPD MR1202	93	RPD TR2123	98	RPL ET5353	145
RPC MR1203	101	RPD FG0803	97	RPD MR1203	93	RPD TR3120	98	RPL PR0400	143
RPC MR1402	101	RPD FG1000	97	RPD MR1402	93	RPD TR3121	98	RPL PR0600	143
RPC MR1403	101	RPD FG1001	97	RPD MR1403	93	RPD TR3821	98	RPL PR0601	143
RPC MR1602	101	RPD FG1002	97	RPD MR1602	93	RPD TR3822	98	RPL PR0800	143
RPC MR1603	101	RPD FG1003	97	RPD MR1603	93	RPD TR4120	98	RPL PR0801	143
RPC MR1820	100	RPD FG1201	97	RPD MR1820	94	RPD TR4121	98	RPL PR0802	143
RPC MR2121	100	RPD FG1202	97	RPD MR2121	94	RPD TR5120	98	RPL PR1001	143
RPC MR2122	100	RPD FG1203	97	RPD MR2122	94	RPD TR5121	98	RPL PR1002	143
RPC MR2123	100	RPD FG1402	97	RPD MR2123	94	RPD TR5122	98	RPL PR1003	143
RPC MR3120	100	RPD FG1403	97	RPD MR3120	94	RPD TR5320	98	RPL PR1201	143
RPC MR3121	100	RPD FG1602	97	RPD MR3121	94	RPH EE1818	127	RPL PR1202	143
RPC MR3122	100	RPD FG1603	97	RPD MR3122	94	RPH EE2121	127	RPL PR1203	143
RPC MR3820	100	RPD FG1826	95	RPD MR3820	94	RPH EE3131	127	RPL PR1820	142
RPC MR3821	100	RPD FR1820	96	RPD MR3821	94	RPH EE3838	127	RPL PR2120	142
RPC MR3822	100	RPD FR2121	96	RPD MR3822	94	RPH EE4141	127	RPL PR2121	142
RPC MR3823	100	RPD FR2122	96	RPD MR3823	94	RPH EE5151	127	RPL PR2122	142
RPC MR4120	100	RPD FR3120	96	RPD MR4120	94	RPH EE5353	127	RPL PR2123	142
RPC MR4121	100	RPD FR3121	96	RPD MR4121	94	RPH PT0404	127	RPL PR3120	142
RPC MR4122	100	RPD FR3821	96	RPD MR4122	94	RPH PT0606	127	RPL PR3820	142
RPC MR5120	100	RPD FR3822	96	RPD MR5120	94	RPH PT0808	127	RPL PR3821	142
RPC MR5121	100	RPD FR4120	96	RPD MR5121	94	RPH PT1010	127	RPL PR3822	142
RPC MR5122	100	RPD FR4121	96	RPD MR5122	94	RPH PT1212	127	RPL PR3823	142
RPC MR5320	100	RPD FR5120	96	RPD MR5320	94	RPH PT1818	127	RPL PR4120	142
RPC MR5321	100	RPD FR5121	96	RPD MR5321	94	RPH PT2121	127	RPL PR4121	142
RPC PT0404	121	RPD FR5122	96	RPD TG04M5	99	RPH PT3131	127	RPL PR5120	142
RPC PT0606	121	RPD FR5320	96	RPD TG06M5	99	RPH PT3838	127	RPL PR5121	142
RPC PT0808	121	RPD FR5321	96	RPD TG0400	99	RPH PT4141	127	RPL PR5122	142
RPC PT1010	121	RPD MG04M5	94	RPD TG0401	99	RPH PT5151	127	RPL PR5320	142
RPC PT1212	121	RPD MG06M5	94	RPD TG0600	99	RPH PT5353	127	RPL TR0400	144
RPC PT1414	121	RPD MG1826	95	RPD TG0601	99	RPL DR0000	145	RPL TR0600	144
RPC PT1616	121	RPD MG3126	95	RPD TG0602	99	RPL DR0101	145	RPL TR0601	144
RPC PT1818	121	RPD MG4126	95	RPD TG0603	99	RPL DR0202	145	RPL TR0800	144
RPC PT2121	121	RPD MG5326	95	RPD TG0800	99	RPL DR0303	145	RPL TR0801	144

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
RPL TR0802	144	RPM BR3120	136	RPM IR5122	133	RPN IT0804	127	RPQ MR2122	106
RPL TR1001	144	RPM BR3121	136	RPM IR5123	133	RPN IT0806	127	RPQ MR2123	106
RPL TR1002	144	RPM BR3122	136	RPM IR5320	133	RPN IT1006	127	RPQ MR3120	106
RPL TR1003	144	RPM BR3821	136	RPM OG1826	134	RPN IT1008	127	RPQ MR3121	106
RPL TR1201	144	RPM BR3822	136	RPM OG3126	134	RPN IT3153	126	RPQ MR3122	106
RPL TR1202	144	RPM BR3823	136	RPM OG4126	134	RPN IT3841	126	RPQ MR3820	106
RPL TR1203	144	RPM BR4120	136	RPM OG5326	134	RPN IT3851	126	RPQ MR3821	106
RPL TR1820	143	RPM BR4121	136	RPM OR0400	135	RPN IT4153	126	RPQ MR3822	106
RPL TR2120	143	RPM BR4122	136	RPM OR0401	135	RPN IT5131	126	RPQ MR3823	106
RPL TR2121	143	RPM BR5120	136	RPM OR0600	135	RPN IT5141	126	RPQ MR4120	106
RPL TR2122	143	RPM BR5121	136	RPM OR0601	135	RPN IT5153	126	RPQ MR4121	106
RPL TR2123	143	RPM BR5122	136	RPM OR0602	135	RPN KR1082	116	RPQ MR4122	106
RPL TR3120	143	RPM BR5123	136	RPM OR0603	135	RPN KR1083	116	RPQ MR5120	106
RPL TR3820	143	RPM BR5320	136	RPM OR0800	135	RPN KR3851	116	RPQ MR5121	106
RPL TR3821	143	RPM IG1826	133	RPM OR0801	135	RPN KR4153	116	RPQ MR5122	106
RPL TR3822	143	RPM IG3126	133	RPM OR0802	135	RPN KR5141	116	RPQ MR5320	106
RPL TR3823	143	RPM IG4126	133	RPM OR0803	135	RPN KR5153	116	RPQ MR5321	106
RPL TR4120	143	RPM IG5326	133	RPM OR1000	135	RPN KR6400	116	RPQ PT0404	122
RPL TR4121	143	RPM IR0400	134	RPM OR1001	135	RPN KR8401	116	RPQ PT0606	122
RPL TR5120	143	RPM IR0401	134	RPM OR1002	135	RPN KR8601	116	RPQ PT0808	122
RPL TR5121	143	RPM IR0600	134	RPM OR1003	135	RPQ MG04M5	107	RPQ PT1010	122
RPL TR5122	143	RPM IR0601	134	RPM OR1201	135	RPQ MG06M5	107	RPQ PT1212	122
RPL TR5320	143	RPM IR0602	134	RPM OR1202	135	RPQ MG1826	106	RPQ PT1818	122
RPM BG04M5	137	RPM IR0603	134	RPM OR1203	135	RPQ MG3126	106	RPQ PT2121	122
RPM BG06M5	137	RPM IR0800	134	RPM OR1820	135	RPQ MG4126	106	RPQ PT3131	122
RPM BG1826	136	RPM IR0801	134	RPM OR2122	135	RPQ MG5326	106	RPQ PT3838	122
RPM BG3126	136	RPM IR0802	134	RPM OR2123	135	RPQ MR0400	107	RPQ PT4141	122
RPM BG4126	136	RPM IR0803	134	RPM OR3120	135	RPQ MR0401	107	RPQ PT5151	122
RPM BG5326	136	RPM IR1000	134	RPM OR3121	135	RPQ MR0500	107	RPQ PT5353	122
RPM BR0400	137	RPM IR1001	134	RPM OR3122	135	RPQ MR0501	107	RPR PT0604	120
RPM BR0401	137	RPM IR1002	134	RPM OR3821	135	RPQ MR0502	107	RPR PT0804	120
RPM BR0600	137	RPM IR1003	134	RPM OR3822	135	RPQ MR0503	107	RPR PT0806	120
RPM BR0601	137	RPM IR1201	134	RPM OR3823	135	RPQ MR0600	107	RPR PT1006	120
RPM BR0602	137	RPM IR1202	134	RPM OR4120	135	RPQ MR0601	107	RPR PT1008	120
RPM BR0603	137	RPM IR1203	134	RPM OR4121	135	RPQ MR0602	107	RPR PT1208	120
RPM BR0800	137	RPM IR1820	133	RPM OR4122	135	RPQ MR0603	107	RPR PT1210	120
RPM BR0801	137	RPM IR2122	133	RPM OR5120	135	RPQ MR0800	107	RPR PT2138	120
RPM BR0802	137	RPM IR2123	133	RPM OR5121	135	RPQ MR0801	107	RPR PT2141	120
RPM BR0803	137	RPM IR3120	133	RPM OR5122	135	RPQ MR0802	107	RPR PT2151	120
RPM BR1000	137	RPM IR3121	133	RPM OR5123	135	RPQ MR0803	107	RPR PT3841	120
RPM BR1001	137	RPM IR3122	133	RPM OR5320	135	RPQ MR1000	107	RPR PT3851	120
RPM BR1002	137	RPM IR3821	133	RPN ET0404	126	RPQ MR1001	107	RPR PT4153	120
RPM BR1003	137	RPM IR3822	133	RPN ET0606	126	RPQ MR1002	107	RPR PT5141	120
RPM BR1201	137	RPM IR3823	133	RPN ET0808	126	RPQ MR1003	107	RPR PT5153	120
RPM BR1202	137	RPM IR4120	133	RPN ET3131	126	RPQ MR1201	107	RPS DR0000	130
RPM BR1203	137	RPM IR4121	133	RPN ET4141	126	RPQ MR1202	107	RPS DR0100	130
RPM BR1820	136	RPM IR4122	133	RPN ET5151	126	RPQ MR1203	107	RPS DR0101	130
RPM BR2122	136	RPM IR5120	133	RPN ET5353	126	RPQ MR1820	106	RPS DR0201	130
RPM BR2123	136	RPM IR5121	133	RPN IT0604	127	RPQ MR2121	106	RPS DR0202	130

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
RPS DR0302	130	RPS TR1001	129	RPT AR3122	114	RPT CR3822	112	RPU IT5318	120
RPS DR0303	130	RPS TR1002	129	RPT AR3820	114	RPT CR3823	112	RPU TT0404	119
RPS DR2020	130	RPS TR1003	129	RPT AR3821	114	RPT CR4120	112	RPU TT0606	119
RPS DR2120	130	RPS TR1201	129	RPT AR3822	114	RPT CR4121	112	RPU TT0808	119
RPS DR2121	130	RPS TR1202	129	RPT AR3823	114	RPT CR4122	112	RPU TT1010	119
RPS DR2221	130	RPS TR1203	129	RPT AR4120	114	RPT CR5120	112	RPU TT1212	119
RPS DR2222	130	RPS TR2122	129	RPT AR4121	114	RPT CR5121	112	RPU TT1616	119
RPS DR2322	130	RPS TR2123	129	RPT AR4122	114	RPT CR5122	112	RPU TT1818	119
RPS DR2323	130	RPS TR3821	129	RPT AR5120	114	RPT CR5320	112	RPU TT2121	119
RPS ET0606	131	RPS TR3822	129	RPT AR5121	114	RPT CR5321	112	RPU TT3131	119
RPS ET0808	131	RPS TR4120	129	RPT AR5122	114	RPT ET0404	125	RPU TT3838	119
RPS ET1010	131	RPS TR4121	129	RPT AR5320	114	RPT ET0606	125	RPU TT4141	119
RPS ET1212	131	RPS TR4122	129	RPT AR5321	114	RPT ET0808	125	RPU TT5151	119
RPS ET2121	132	RPS TR5120	129	RPT CG04M5	113	RPT ET1010	125	RPU TT5353	119
RPS ET3838	132	RPS TR5121	129	RPT CG06M5	113	RPT ET1212	125	RPV BG1826	141
RPS ET4141	132	RPS TR5122	129	RPT CG1826	112	RPT ET1414	125	RPV BG3126	141
RPS ET5151	132	RPT AG04M5	115	RPT CG3126	112	RPT ET1616	125	RPV BG4126	141
RPS IT0806	132	RPT AG06M5	115	RPT CG4126	112	RPT ET1818	125	RPV BG5326	141
RPS IT1210	132	RPT AG1826	114	RPT CG5326	112	RPT ET2121	125	RPV BR0400	142
RPS IT2138	131	RPT AG3126	114	RPT CR0400	113	RPT ET3131	125	RPV BR0401	142
RPS IT5141	131	RPT AG4126	114	RPT CR0401	113	RPT ET3838	125	RPV BR0600	142
RPS PR0600	128	RPT AG5326	114	RPT CR0600	113	RPT ET4141	125	RPV BR0601	142
RPS PR0601	128	RPT AR0400	115	RPT CR0601	113	RPT ET5151	125	RPV BR0602	142
RPS PR0602	128	RPT AR0401	115	RPT CR0602	113	RPT ET5353	125	RPV BR0603	142
RPS PR0800	128	RPT AR0600	115	RPT CR0603	113	RPU ET0404	119	RPV BR0800	142
RPS PR0801	128	RPT AR0601	115	RPT CR0800	113	RPU ET0606	119	RPV BR0801	142
RPS PR0802	128	RPT AR0602	115	RPT CR0801	113	RPU ET0808	119	RPV BR0802	142
RPS PR1001	128	RPT AR0603	115	RPT CR0802	113	RPU ET1010	119	RPV BR0803	142
RPS PR1002	128	RPT AR0800	115	RPT CR0803	113	RPU ET1212	119	RPV BR1000	142
RPS PR1003	128	RPT AR0801	115	RPT CR1000	113	RPU ET1414	119	RPV BR1001	142
RPS PR1201	128	RPT AR0802	115	RPT CR1001	113	RPU ET1616	119	RPV BR1002	142
RPS PR1202	128	RPT AR0803	115	RPT CR1002	113	RPU ET1818	119	RPV BR1003	142
RPS PR1203	128	RPT AR1000	115	RPT CR1003	113	RPU ET2121	119	RPV BR1201	142
RPS PR2122	128	RPT AR1001	115	RPT CR1201	113	RPU ET3131	119	RPV BR1202	142
RPS PR2123	128	RPT AR1002	115	RPT CR1202	113	RPU ET3838	119	RPV BR1203	142
RPS PR3821	128	RPT AR1003	115	RPT CR1203	113	RPU ET4141	119	RPV BR1820	141
RPS PR3822	128	RPT AR1201	115	RPT CR1402	113	RPU ET5151	119	RPV BR2122	141
RPS PR4120	128	RPT AR1202	115	RPT CR1403	113	RPU ET5353	119	RPV BR2123	141
RPS PR4121	128	RPT AR1203	115	RPT CR1602	113	RPU IT0604	120	RPV BR3120	141
RPS PR4122	128	RPT AR1402	115	RPT CR1603	113	RPU IT0806	120	RPV BR3121	141
RPS PR5120	128	RPT AR1403	115	RPT CR1820	112	RPU IT1008	120	RPV BR3122	141
RPS PR5121	128	RPT AR1602	115	RPT CR2121	112	RPU IT1210	120	RPV BR3821	141
RPS PR5122	128	RPT AR1603	115	RPT CR2122	112	RPU IT1612	120	RPV BR3822	141
RPS TR0600	129	RPT AR1820	114	RPT CR2123	112	RPU IT2138	120	RPV BR3823	141
RPS TR0601	129	RPT AR2121	114	RPT CR3120	112	RPU IT3153	120	RPV BR4120	141
RPS TR0602	129	RPT AR2122	114	RPT CR3121	112	RPU IT3851	120	RPV BR4121	141
RPS TR0800	129	RPT AR2123	114	RPT CR3122	112	RPU IT4131	120	RPV BR4122	141
RPS TR0801	129	RPT AR3120	114	RPT CR3820	112	RPU IT4153	120	RPV BR5120	141
RPS TR0802	129	RPT AR3121	114	RPT CR3821	112	RPU IT5141	120	RPV BR5121	141

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
RPV BR5122	141	RPV OR0602	140	RPY ET1818	122	RPY MR2123	117	RSIMF 203	165
RPV BR5123	141	RPV OR0603	140	RPY ET2121	122	RPY MR3120	117	RSIMF 204	165
RPV BR5320	141	RPV OR0800	140	RPY ET3131	122	RPY MR3121	117	RST RASB1425	238
RPV IG1826	138	RPV OR0801	140	RPY ET3838	122	RPY MR3122	117	RST RASB1450	238
RPV IG3126	138	RPV OR0802	140	RPY ET4141	122	RPY MR3820	117	RST RASB3825	238
RPV IG4126	138	RPV OR0803	140	RPY ET5151	122	RPY MR3821	117	RST RASB3835	238
RPV IG5326	138	RPV OR1000	140	RPY ET5353	122	RPY MR3822	117	RST RASB3850	238
RPV IR0400	139	RPV OR1001	140	RPY IT0604	123	RPY MR3823	117	RST RASB14100	238
RPV IR0401	139	RPV OR1002	140	RPY IT0806	123	RPY MR4120	117	RST RASB38100	238
RPV IR0600	139	RPV OR1003	140	RPY IT1008	123	RPY MR4121	117	RST RESB1250	238
RPV IR0601	139	RPV OR1201	140	RPY IT1210	123	RPY MR4122	117	RST RESB1425	238
RPV IR0602	139	RPV OR1202	140	RPY IT1612	123	RPY MR5120	117	RST RESB1450	238
RPV IR0603	139	RPV OR1203	140	RPY IT2138	123	RPY MR5121	117	RST RESB3825	238
RPV IR0800	139	RPV OR1820	140	RPY IT3153	123	RPY MR5122	117	RST RESB3835	238
RPV IR0801	139	RPV OR2122	140	RPY IT3851	123	RPY MR5320	117	RST RESB3850	238
RPV IR0802	139	RPV OR2123	140	RPY IT4131	123	RPY MR5321	117	RST RESB14100	238
RPV IR0803	139	RPV OR3120	140	RPY IT4153	123	RPY PT0404	124	RST RESB38100	238
RPV IR1000	139	RPV OR3121	140	RPY IT5141	123	RPY PT0604	124	RST RISB1250	238
RPV IR1001	139	RPV OR3122	140	RPY IT5318	123	RPY PT0606	124	RST RISB1425	238
RPV IR1002	139	RPV OR3821	140	RPY MG04M5	118	RPY PT0806	124	RST RISB1450	238
RPV IR1003	139	RPV OR3822	140	RPY MG06M5	118	RPY PT0808	124	RST RISB3825	238
RPV IR1201	139	RPV OR3823	140	RPY MG1826	116	RPY PT1008	124	RST RISB3835	238
RPV IR1202	139	RPV OR4120	140	RPY MG3126	116	RPY PT1010	124	RST RISB3850	238
RPV IR1203	139	RPV OR4121	140	RPY MG4126	116	RPY PT1210	124	RST RISB14100	238
RPV IR1820	138	RPV OR4122	140	RPY MG5326	116	RPY PT1212	124	RST RISB38100	238
RPV IR2122	138	RPV OR5120	140	RPY MR0400	118	RPY PT1414	124	RST RUSB1250	238
RPV IR2123	138	RPV OR5121	140	RPY MR0401	118	RPY PT1616	124	RST RUSB1425	238
RPV IR3120	138	RPV OR5122	140	RPY MR0600	118	RPY PT1818	123	RST RUSB1450	238
RPV IR3121	138	RPV OR5123	140	RPY MR0601	118	RPY PT2121	123	RST RUSB3825	238
RPV IR3122	138	RPV OR5320	140	RPY MR0602	118	RPY PT2138	124	RST RUSB3835	238
RPV IR3821	138	RPX ET0404	126	RPY MR0603	118	RPY PT3131	123	RST RUSB3850	238
RPV IR3822	138	RPX ET0606	126	RPY MR0800	118	RPY PT3838	123	RST RUSB14100	238
RPV IR3823	138	RPX ET0808	126	RPY MR0801	118	RPY PT3851	124	RST RUSB38100	238
RPV IR4120	138	RPX ET1010	126	RPY MR0802	118	RPY PT4141	123	SAAIR 63835S	237
RPV IR4121	138	RPX ET1212	126	RPY MR0803	118	RPY PT4153	124	SAAIR 63850S	237
RPV IR4122	138	RPX ET1818	125	RPY MR1000	118	RPY PT5141	124	SEAIR 73835S	237
RPV IR5120	138	RPX ET2121	125	RPY MR1001	118	RPY PT5151	123	SEAIR 73850S	237
RPV IR5121	138	RPX ET3131	125	RPY MR1002	118	RPY PT5318	124	SER 02	250
RPV IR5122	138	RPX ET3838	125	RPY MR1003	118	RPY PT5353	123	SER 04	250
RPV IR5123	138	RPX ET4141	125	RPY MR1201	118	RSI 201	165	SIAIR 63850S	237
RPV IR5320	138	RPX ET5151	125	RPY MR1202	118	RSI 202	165	SIAIR 83850S	237
RPV OG1826	139	RPX ET5353	125	RPY MR1203	118	RSI 203	165	SK SC5T	188
RPV OG3126	139	RPY ET0404	123	RPY MR1402	118	RSI 204	165	SK SC10T	188
RPV OG4126	139	RPY ET0606	123	RPY MR1403	118	RSI 205	165	SPC 155T	332
RPV OG5326	139	RPY ET0808	123	RPY MR1602	118	RSI 206	165	SPC 235T	332
RPV OR0400	140	RPY ET1010	123	RPY MR1603	118	RSI 207	165	SPC 365T	332
RPV OR0401	140	RPY ET1212	123	RPY MR1820	117	RSI 208	165	SPC 770T	332
RPV OR0600	140	RPY ET1414	123	RPY MR2121	117	RSIMF 201	165	SPC 1280T	332
RPV OR0601	140	RPY ET1616	123	RPY MR2122	117	RSIMF 202	165	SPC D	332

Part number	Page	Part number	Page	Part number	Page	Part number	Page	Part number	Page
SPC Q1	332	TE 202	298	TP Q45	309	URC 081203	75	USI 061203WK	24, 191
SPC Q2	332	TE 203	305	TR 201	293	URC 081251	75	USI 061251	23
SPI 1251	244, 257	TEFLON 12	167	TR 202	298	URC 081252	75	USI 061252	23
SPI 3251	244, 257	TE M8	188	TR 203	304	URC 081253	75	USI 061253	23
SPI 5252	244, 257	TEMP 202115COLS	331	TR 204	308	URC 081810	75	USI 061808	23
SPI 7252	244, 257	TEMP CONNECT	331	TR 205	308	URC 081813	75	USI 061810	23
STOFLEX 3825	233	TEMP MN115V	324, 331	TR E1	294	URC 081813FA	75	USI 068203WK	24, 195
STOFLEX 3835	233	TF 201	293	TR E2	299	URP 066201	25, 55, 74	USI 068204WK	24, 195
STOFLEX 3850	233	TF 202	298	TR E3	306	URP 066202	25, 55, 74	USI 068204WKI6	196
STOFLEX 38500	233	TF 203	304	TR HP203	305	URP 066203	25, 55, 74	USI 081201	26
SURFLEX 3825	233	TF 204T	308	TR HPM203	303	URP 066251	25, 55, 74	USI 081202	26
SURFLEX 3850	233	TF 205T	308	TR M203	303	URP 066252	25, 55, 74	USI 081202SW	27
SURFLEX 38500	233	TF C1	295	TR Q1	294	URP 066253	25, 55, 74	USI 081203	26
TA M1	294	TF C2	300	TR Q2	299	URP 066806	25, 55, 74	USI 081203WK	27, 191
TA M2	299	TF C3	307	TR Q3	306	URP 066810	25, 55, 74	USI 081251	26
TA M3	306	TF C45	310	TR Q45	309	URP 086201	28, 57, 76	USI 081252	26
TA M8FU	188	TF C101	295	TT PSM201	291	URP 086202	28, 57, 76	USI 081253	26
TA M45	309	TF C105	295	TT PSM202	296	URP 086203	28, 57, 76	USI 081813	26
TA S1	294	TF C205	300	TT PSM203	301	URP 086251	28, 57, 76	USI 088203WK	27, 195
TA S2	299	TF C301	307	TT SM201	291	URP 086252	28, 57, 76	USI 088204WK	27, 195
TA S3	306	TF C305	307	TT SM202	296	URP 086253	28, 57, 76	USI 088204WKU6	195
TA S45	309	TF M8100	188	TT SM203	301	URP 086810	28, 57, 76	USI 111202	29
TB CSM201	292	TL 201	293	TVB 660	188	URP 086813	28, 57, 76	USI 111203	29
TB CSM203	302	TL 202	298	TVB 690	188	URP 116202	30	USI 111203WK	29, 191
TB PSM201	291	TL 203	304	UAIR 3806FA	237	URP 116203	30	USI 111204	29
TB PSM202	297	TL 204	308	UAIR 3835FA	237	URP 116204	30	USI 111252	29
TB PSM203	301	TL 205	308	UAIR 3850FA	237	URP 116252	30	USI 111253	29
TB SM201	291	TL M8	188	UBG 06ECR	265	URP 116253	30	USI 111254	29
TB SM202	296	TL RM8	188	UBG 06MTL	264	URP 116254	30	USI 111810	29
TB SM203	301	TM 201	293	UBG 06MTLH	264	USC 061201	54	USI 111813	29
TB SME201	292	TM 202	298	UBG 06OSH	265	USC 061201FA	54	USI 111819	29
TB SME202	297	TM 203	304	UBG 06PRE	264	USC 061202	54	USI 118204WK	29, 195
TB SME203	302	TM 204	308	UBG 06SIL	264	USC 061203	54	USI 118204WKU6	195
TC 201	293	TM 205	308	UPG 06OSH	265	USC 061251	54	USTO 3804FA	236
TC 203	304	TM 20105	293	URC 061201	73	USC 061252	54	USTO 3835FA	236
TC P201	294	TM 20305	304	URC 061201FA	73	USC 061253	54	USTO 3850FA	236
TC P202	299	TM HP203	305	URC 061202	73	USC 061810	54	WHSTO 38A251	236
TC P203	306	TM HPSM203	303	URC 061202FA	73	USC 061810FA	54	WHSTO 38E251	236
TC P204	309	TM PSM201	292	URC 061203	73	USC 081201	56	WHSTO 38FA251	236
TC P205	309	TM PSM202	297	URC 061251	73	USC 081202	56	WHSTO 38I251	236
TC P3204	306	TM PSM203	302	URC 061252	73	USC 081203	56	WHSTO 38U251	236
TC S201	295	TM SM201	292	URC 061253	73	USC 081251	56	Y12	160
TC S202	300	TM SM202	297	URC 061806FA	73	USC 081252	56	Y12M	160
TC S203	307	TM SM203	302	URC 061810	73	USC 081253	56	Y38	160
TC S3204	307	TP F45	295, 300, 307, 310	URC 061810FA	73	USC 081813	56	Y38M	160
TD F1	295	TP Q1	294	URC 081201	75	USI 061201	23		
TD F2	300	TP Q2	299	URC 081201FA	75	USI 061202	23		
TD F3	307, 310	TP Q3	306	URC 081202	75	USI 061202SW	23		
TE 201	293			URC 081202FA	75	USI 061203	23		

