

RX14 & RX16 Scissor Lifts

Low-profile, high-capacity

NEW & UPDATED




RX14/16 Scissor Lift

Massive capacity
with a small footprint

STANDARD

Extra-wide runways

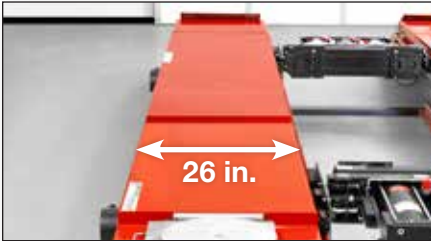

- ✓ 26 in. runways accept wide, heavy vehicles


Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically
- ✓ Optional stainless steel slip plates

STANDARD

Integrated air line

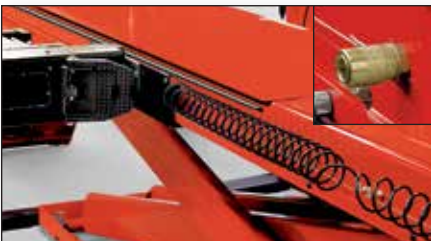


- ✓ Convenient air source for tools at front and rear


Low drive-on and high raise height



- ✓ Only 10.75 in. fully lowered
- ✓ Reduces clearance issues



- ✓ Comfortable 72 in. maximum height

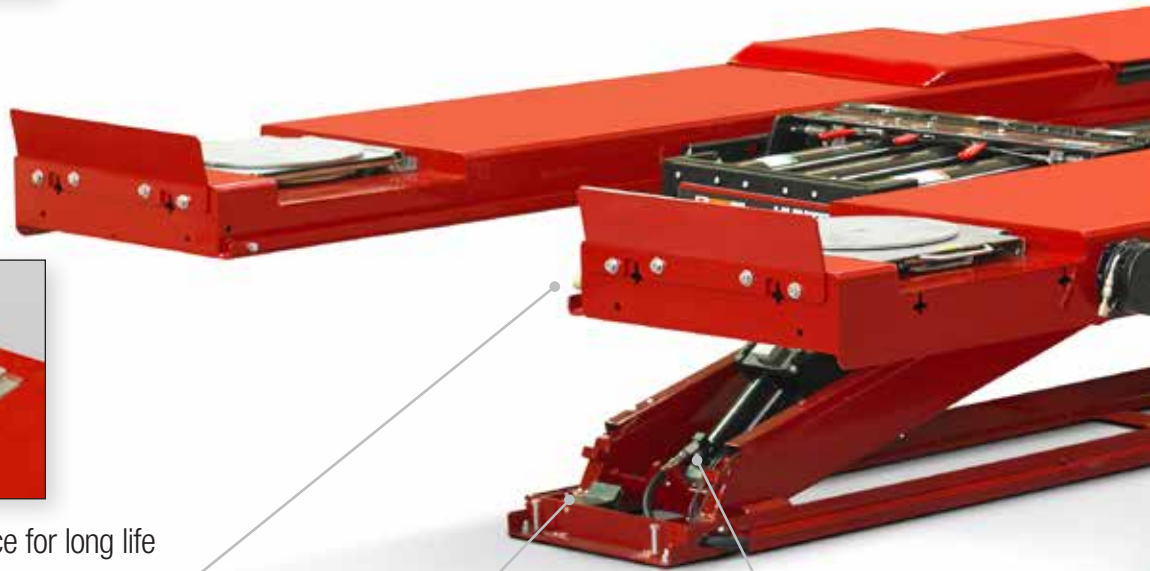

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

STANDARD

Velocity safety fuses



- ✓ Instantaneous shutdown in event of hydraulic failure

* Shown with protective cover removed

STANDARD


Two Swing Air Jacks



- ✓ 9,000-lb. capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

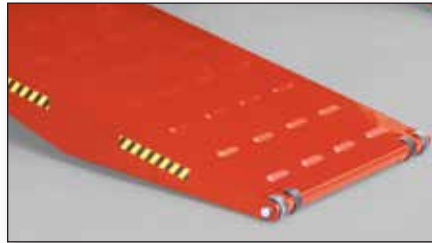

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide®, Inflation Station and FIA control



RX14KIS-PRR shown with optional light kit and stainless steel slip plates

STANDARD

Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

FAST
Descent

0:25

0:50

Others



STANDARD

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 9,000-lb. (4082-kg) capacity
- ✓ Folding design provides lowest-profile

133-84-1 — 9,000-lb. Capacity Swing Air Jack

EXCLUSIVE

RX16K flush-mount


- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability



OPTIONAL

Extend your service life - Enhanced Corrosion Protection

- ✓ Zinc-rich primed, powder-coated and caulked runways
- ✓ Zinc-rich primed and powder-coated bases and ramps
- ✓ Stainless steel slipplates and turnplates

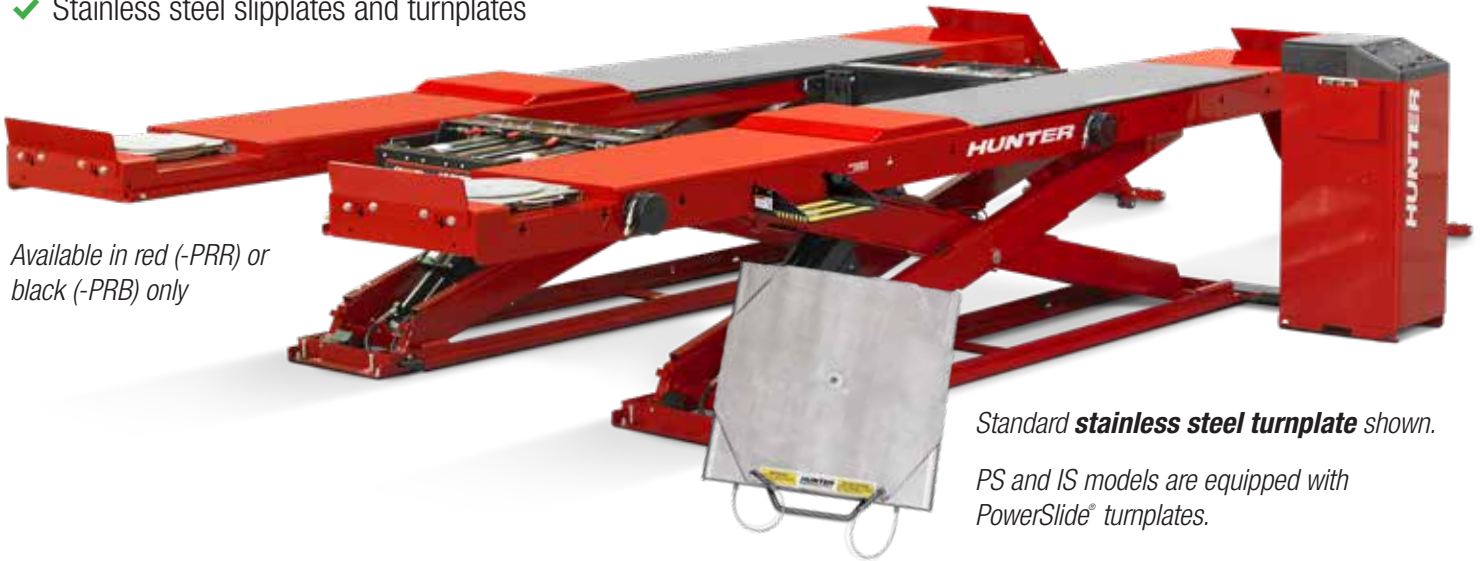

Available in red (-PRR) or black (-PRB) only

Standard **stainless steel turnplate** shown.

PS and IS models are equipped with PowerSlide® turnplates.

EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — AlignLights system



OPTIONAL

Approach ramp extensions

Extensions lessen the ramp incline for high-floor-slope installs and ease service for specialty vehicles.



17 in. kit – 20-3113-1
Adds 5 in. to RX14K



40 in. kit* – 20-2169-1
Adds approximately 28 in. to RX14K

50 in. kit* – 20-2189-1
Adds approximately 38 in. to RX14K

* Quick-release pins included.

OPTIONAL

Wheel stop extension

Provides additional space for conventional sensors and vehicles with low spoilers.



20-2497-1
Adds approximately 12 in. to RX14K

Drive-thru conversion*



52 in. kit – 20-2498-1
For camera sensors


63 in. kit – 20-2501-1
For conventional sensors

Hunter offers two fully integrated options to enhance productivity



FIA Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.

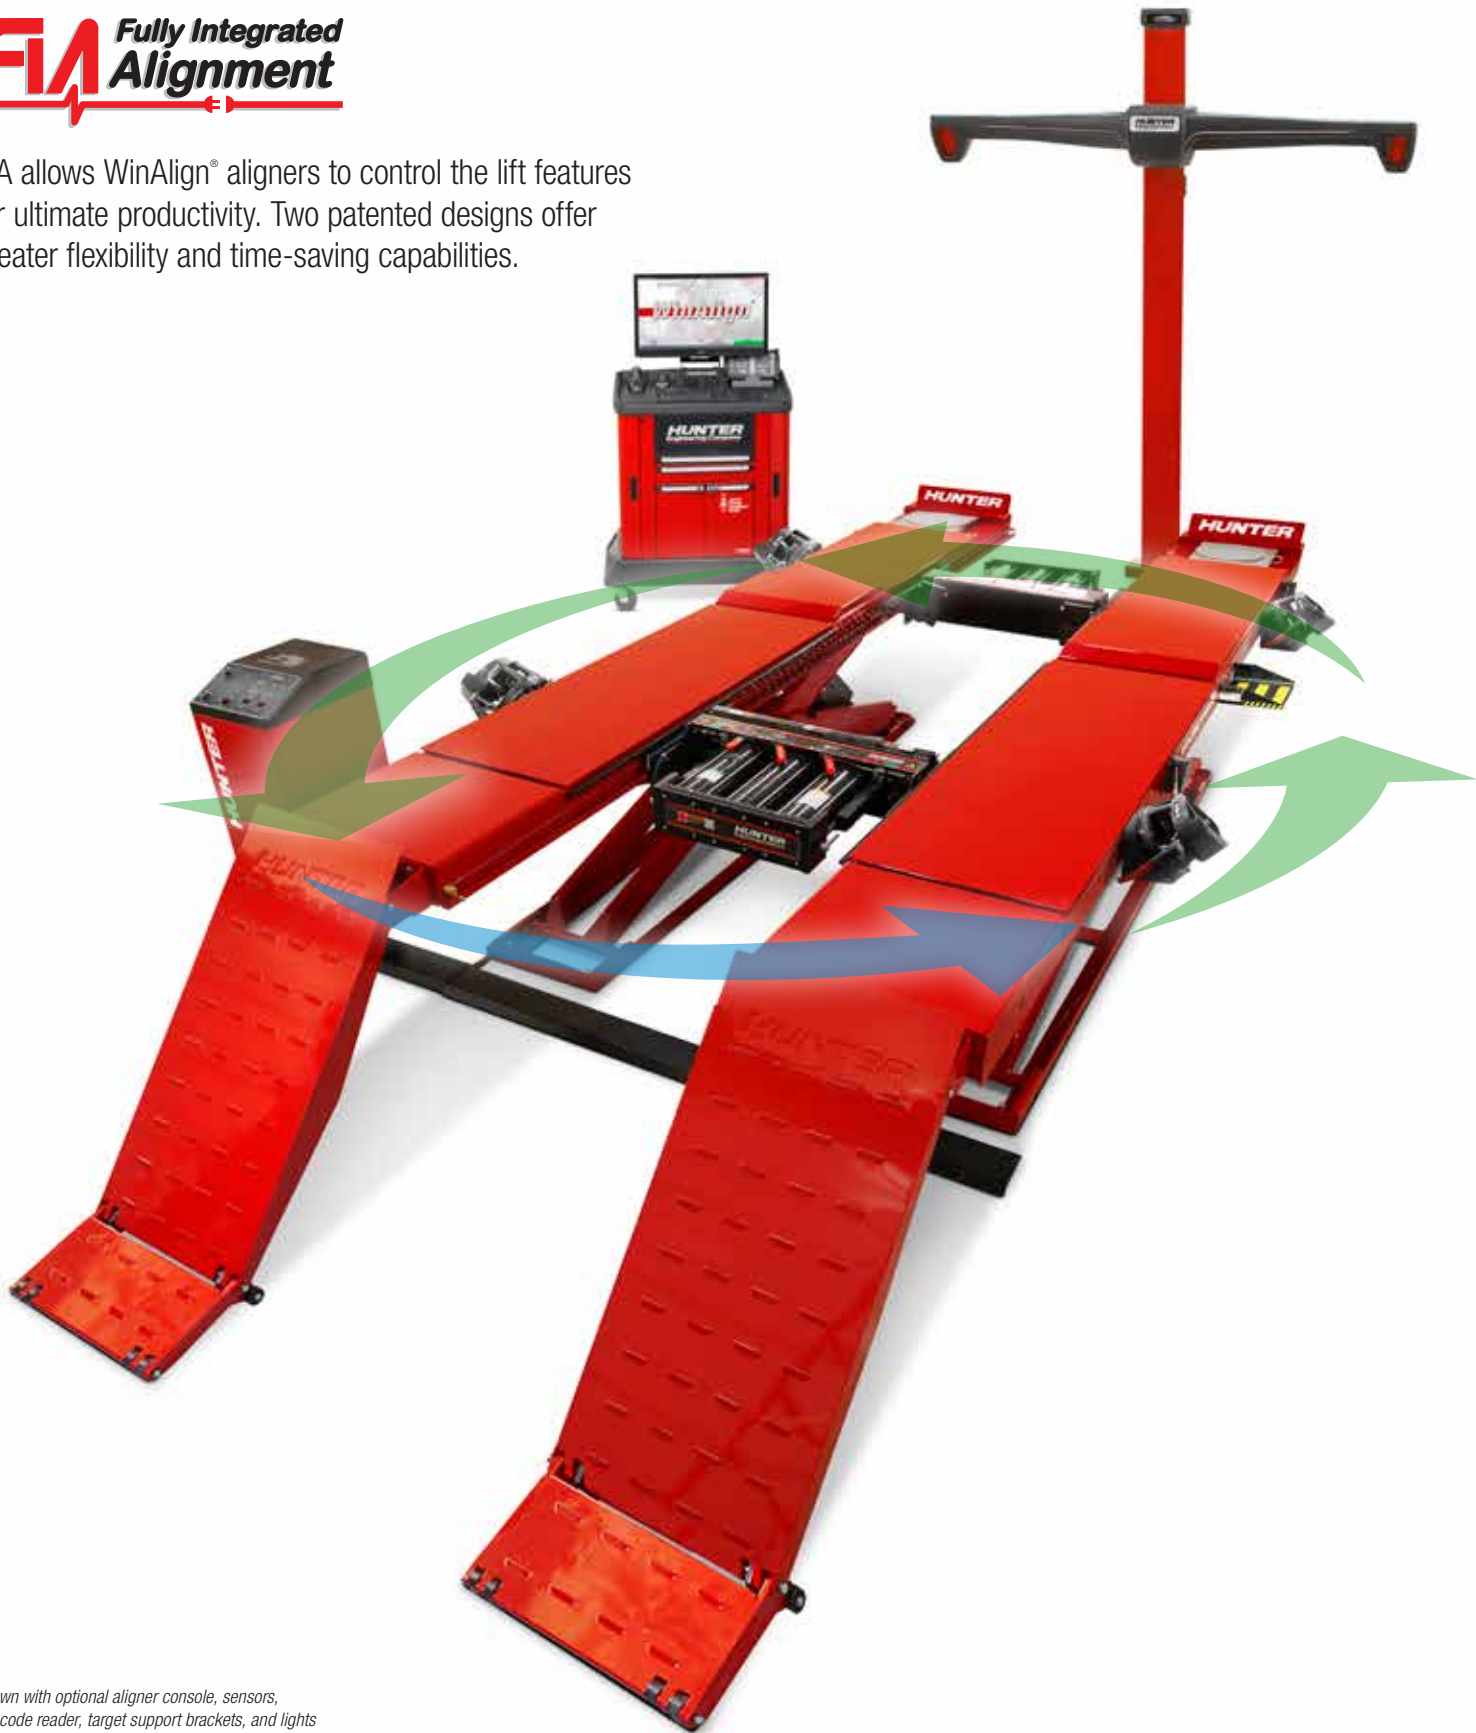

Shown with optional aligner console, sensors, bar code reader, target support brackets, and lights




PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



STANDARD

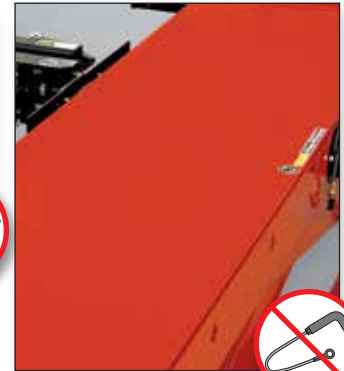


STANDARD

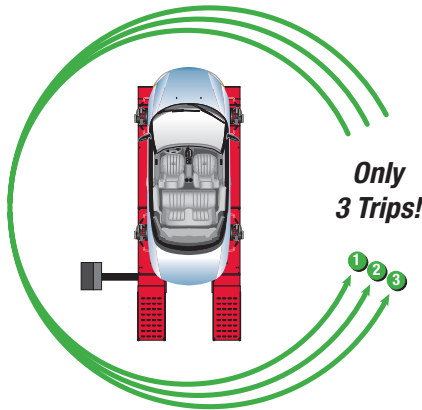

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


Yesterday's Technology

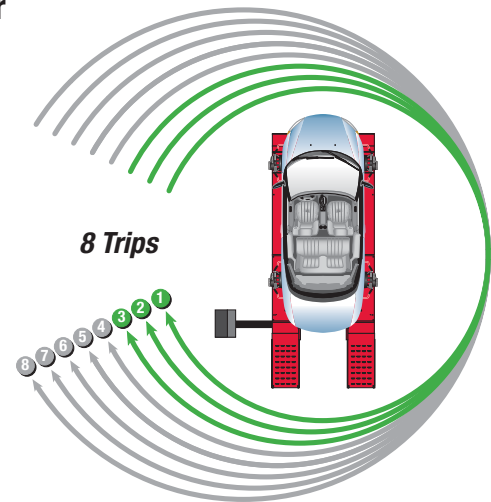

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear

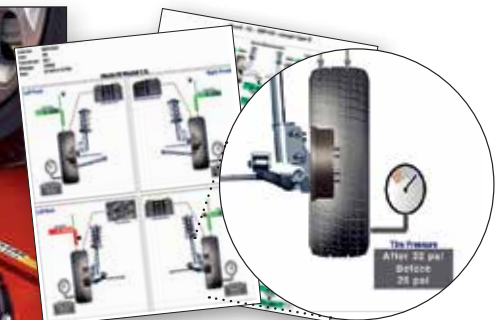

Printouts show starting and final tire pressures.


* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	Flush-mount RX16KF	Surface-mount RX14K
Max. vehicle weight	16,000 lbs. (7257 kg)	14,000 lbs. (6350 kg)
Max. wheelbase		
General service	183 in. (4648 mm)	187 in. (4749 mm)
Two-wheel alignment	178 in. (4521 mm)	182 in. (4623 mm)
Four-wheel alignment	158 in. (4013 mm)	
Min. four-wheel alignment	88 in. (2235 mm)	
Lowered height	N/A	10.75 in. (273 mm)
Max. lifting height	71 in. (1803 mm)	72 in. (1828 mm)
Alignment height	All lock positions	
Runway width	26 in. (660 mm)	
Tread width		
Min. inside	40 in. (1016 mm)	
Max. outside	92 in. (2337 mm)	
Air pressure	90-150 psi (6.2-10.3 bar)*	
Speed	60 seconds (raise) 25 seconds (descent)	

* 125 psi required for full jack capacity

RX14K Plan View

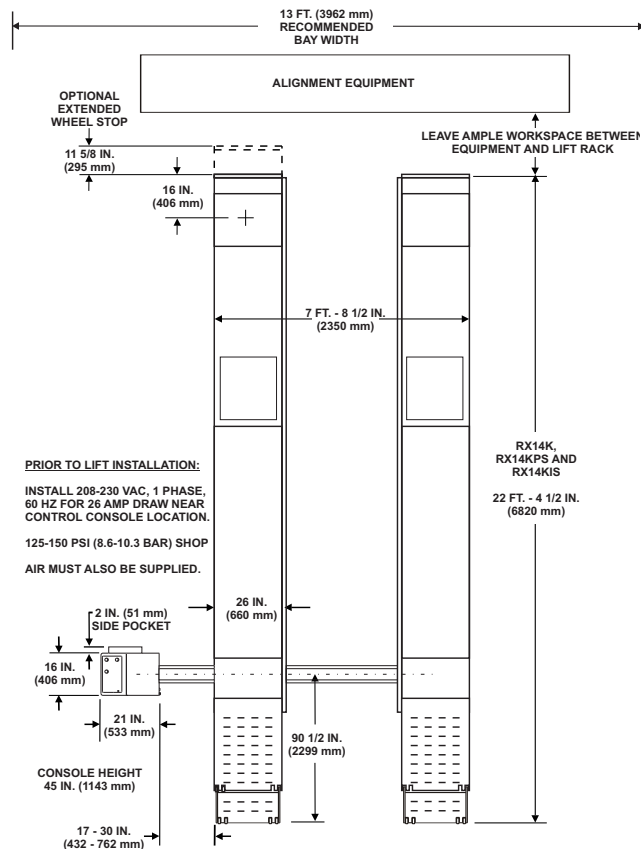

See your Hunter Sales Representative for details on site requirement.

Models

	RX16KFIS	RX14KIS	RX16KFPS	RX14KPS	RX16KF	RX14K
Fully Integrated Alignment	✓	✓	✓	✓		
Inflation Station	✓	✓				
PowerSlide® slippates and turnplates	✓	✓	✓	✓		
Stainless steel turnplates					✓	✓
9,000-lb. Swing Air Jacks	✓	✓	✓	✓	✓	✓
Flush-mounted	✓		✓		✓	



The Hunter RX14K and RX16K Series Scissor Lifts have been certified under the program conducted by Automotive Lift Institute (ALI) to comply with Safety Standard ANSI/ALI ALCTV and Electrical Standard UL 201.

Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0819DH

Copyright © 2019, Hunter Engineering Company



Be sure to check out other Hunter literature for more quality products from Hunter Engineering.

HUNTER

Engineering Company

www.hunter.com

Form 7473-T, 08/19
Supersedes form 7473-T,05/19